

INSTALLATION INSTRUCTIONS



STARTEK
LIGHTING AMERICA

AVION DIRECT/INDIRECT
MODELS # AVNDI-18, AVNDI-36
REV. 4



WARNING

- ★ THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**

CE PRODUIT DOIT ETRE INSTALLE SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAIT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHERENTS.
- ★ DISCONNECT POWER PRIOR TO ANY INSTALLATION.**

DEBRANCHEZ LE COURANT AVANT TOUTE INSTALLATION.
- ★ CAP ALL WIRING CONNECTIONS WITH UL APPROVED WIRE CONNECTORS.**

COUVRIR TOUTES LES CABLES AVE DES CONNECTIONS APPROUVES (UL).
- ★ VERIFY SUPPLY VOLTAGE MEETS LUMINAIRE LABEL SPECIFICATIONS.**

VERIFIEZ QUE LA TENSION SOIT COMPATIBLE AVEC LES CARACTERISTIQUES DU LUMINAIRE MARQUE SUR LETIQUETTE.
- ★ ALLOW FIXTURE TO COOL BEFORE TOUCHING HEATSINK OR LIGHT SOURCE.**

LAISSEZ LE PROJECTEUR REFOIDIR AVANT DE TOUCHER LE RADIATEUR OU LA SOURCE DE LUMIERE.
- ★ DO NOT ATTEMPT TO OPEN OR MAKE REPAIRS INSIDE LUMINAIRE.**

NE PAS TENTER DOUVRIRE OU DE FAIRE DES REPARATINS A L'INTERIEUR DU LUMINAIRE.
- ★ AVOID DIRECT VIEWING OF LIGHT SOURCE.**

EVITEZ DE REGARDER DIRECTMENT LA SOURCE LUMINEUSE.
- ★ THIS PRODUCT MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN.**

CE PRODUIT DOIT ETRE INSTALLE PAR UN ELECTRICIEN QUALIFIE.
- ★ SUITABLE FOR DAMP LOCATION.**

ADAOTE POUR DES ENDROITS HUMIDES.
- ★ MIN 105° C SUPPLY CONDUCTORS.**

MIN 105° C ALIMENTATION CONDUCTEURS.

INSTALLATION INSTRUCTIONS

AVION DIRECT/INDIRECT
MODELS # AVNDI-18, AVNDI-36
REV. 4

Provided Parts List

The components have been packed to avoid damage during transit. Inspect the components to confirm there is no physical damage. Do not install damaged components. The carton contains the following:

- ★ Avion Direct/Indirect (AVNDI-XX) fixture
- ★ Mounting Brackets and Hardware (may be attached to fixture depending on mounting type)
- ★ Installation Manual

Mounting

Inspect mounting location for damage. Make sure the structure can support the weight of the AVNDI-XX fixture. Follow all UL, NEC and minimum load rating guidelines when selecting and installing mounting hardware for the fixture.

- ★ Fixture Weights:
AVNDI - 18" (6lbs. max) / 36" (12lbs. max)

Pendant Mount Instructions

Pendant Mount Fixtures come standard with adjustable gripper that accepts 1/16" aircraft cable.



INSTALLATION INSTRUCTIONS


AVION DIRECT/INDIRECT
MODELS # AVNDI-18, AVNDI-36
REV. 4



Avion Direct/Indirect Installation

Individual Fixture Installation

1. Power must be turned OFF prior to disconnecting or reconnecting the Avion fixture
2. If fixture is not fitted with existing plug, connect fixture wiring to line side wires. Use only UL listed wiring devices. Purple and Gray leads are used for 0-10 dimming ONLY. Cap wires if not used (see below). The wiring inside the fixtures is rated 14AWG. Line side wiring connected by the installer must be rated for the load per (NEC) National Electric Code and/or local electric code. *

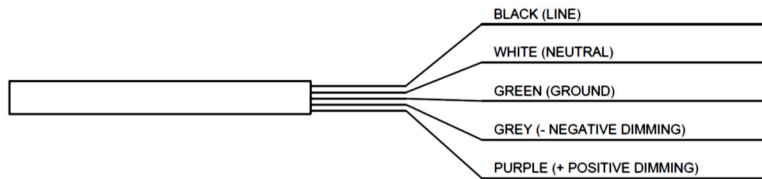

3. Restore power and verify operation.