

Type:	
Project:	




FEATURES

- Wet location rated
- Vandal resistant polycarbonate lens
- Low profile housing with integral driver
- Soft diffuse lighting
- Up to 128 lm/W
- Black powder coat finish is standard
- 5 Year warranty
- Designed and assembled in the U.S.A.
- 0-10v Dimming is standard
- Available in 120-277v only



DIMENSIONS

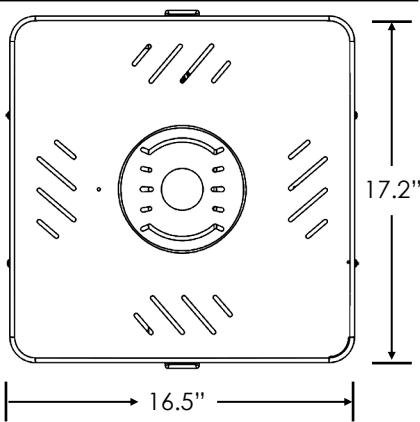


LUMEN PACKAGES

Based on 4000K CCT. Other CCT available.

MODEL	LUMENS	INPUT WATTS	Lm/W
SSP-2-40K	3,580	28	128
SSP-3-40K	4,000	32	125
SSP-4-40K	5,100	42	123
SSP-5-40K	6,410	53	121
SSP-6-40K	7,580	64	119

PERFORMANCE

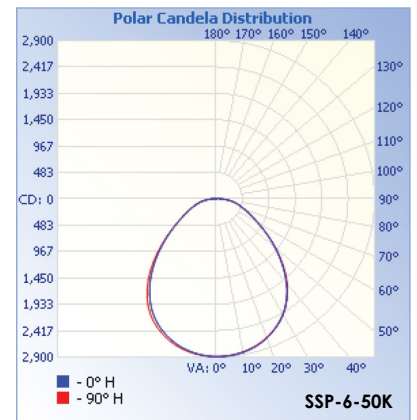

ORDERING LOGIC

SSP	-	-	-	PD	-	-	-			
SERIES	-	WATTAGE	-	COLOR TEMP	-	LENS	-	MOUNTING	-	OPTIONS***
SSP		2=28W 3=32W 4=42W 5=53W 6=64W		30K=3000K 35K=3500K 40K=4000K 50K=5000K		PD=Polycarbonate Diffused		SM=Surface Mount PM=Pendant Mount HM=Hook Mount		DME=Daylight/Motion Sensor EMB10=10w Battery P5=L5-15p plug P6=L6-15p plug P7=L7-15p plug

EXAMPLE: SSP-4-40K-PD-SM

*** Optional

WARRANTY

5-year limited warranty. Complete warranty terms can be located at:

http://www.starteklightingamerica.com/images/pdf/warranty/Maximo_Warranty.pdf

Note: Actual performance may differ as a result of installation environment and final application. All values are design or typical values, measured under laboratory conditions, at 25°C (77°F).