


Type:	
Project:	
REP/Agent:	
Order #:	



DIMENSIONS

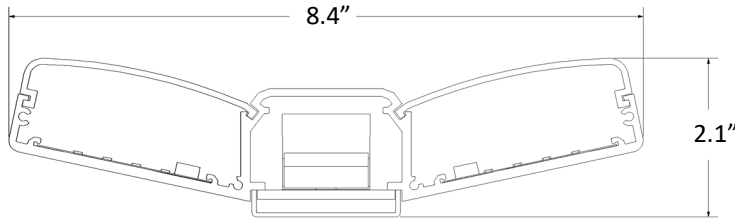

FEATURES

- Architectural High Bay
- Extruded aluminum single piece housing
- Two standard lumen packages available
- Efficacy up to 153 lm/W
- Soft diffuse lighting with acrylic lens standard
- Textured powder coat finishes available in black and white
- Custom powder coat colors available upon request
- 0-10v dimming is standard
- Dim to 1% of output current is standard
- Natatorium option available
- 90 CRI (R9 50min) available
- CA Title 24 / JA8 installation compatible



LUMEN PACKAGES

Based on 3500K CCT. Other CCT available.

MODEL	LUMENS	INPUT WATTS	Lm/W
AVNI-18-S-35K	6,517	45	145
AVNI-18-H-35K	9,223	64	144
AVNI-36-S-35K	13,263	91	146
AVNI-36-H-35K	18,676	130	144

ORDERING LOGIC

SERIES	OUTPUT	CCT	CRI	FINISH	MOUNTING	VOLTAGE	OPTIONS
AVNI-18 = 18" Length	S=Standard H=High	30K=3000K 35K=3500K	80=80 90=90 (R9 50min)	STANDARD PB=Powder Coat Black PW=Powder Coat White	CABLES WITH CANOPY KITS ACW05=White Cord 5' ACW10=White Cord 10' ACB05=Black Cord 5' ACB10=Black Cord 10'	U=120-277V C=347V	BATTERIES EMB6=6W EM Battery EMB10=10W EM Battery
AVNI-36 = 36" Length		40K=4000K 50K=5000K		PREMIUM RALxxxx= Powder Coat RAL xxxx (Gloss Finish)	CABLES WITH LOOPS ALW10=White Cord 10' ALB10=Black Cord 10'		SENSORS DMxx%=Daylight/Motion Sensor (xx%= % Min. Dimming)
				CUSTOM PO=Powder Other	OTHER RM = Rotational Mount		OTHER NAT=Natatorium WG=Wire Guard NPx=Nema Plug (Various)

EXAMPLE: AVNI-36-S-35K-80-PB-ALB10-U-EMB10

PRELIMINARY