


# Lestra

## Pool & Area Indirect

Type:	
Project:	
REP/Agent:	
Order #:	



### DIMENSIONS

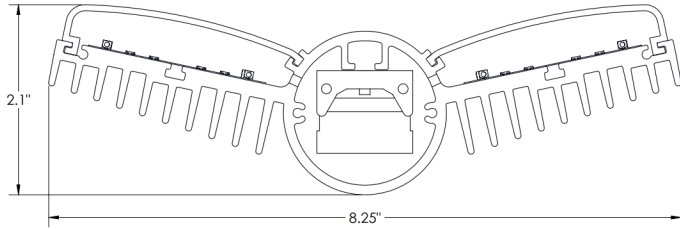

### FEATURES

- Architectural mid/low bay
- Extruded aluminum single piece housing
- Up or Down light orientation
- Two standard lumen packages available
- Efficacy up to 144 lm/W
- Soft diffuse lighting with acrylic lens standard
- White powder coat or black anodize
- Custom powder coat colors available upon request\*
- 0-10v dimming is standard
- Dim to 1% of output current is standard
- Natatorium option available
- 90 CRI (R9 50min) available
- CA Title 24 / JA8 installation compatible



### LUMEN PACKAGES

Based on 3500K CCT. Other CCT available.

MODEL	LUMENS	INPUT WATTS	Lm/W
LSTI-18-S-35K	9,446	69	138
LSTI-36-S-35K	18,720	136	138

### ORDERING LOGIC

SERIES	OUTPUT	CCT	CRI	FINISH	MOUNTING**	VOLTAGE	OPTIONS
<b>LSTI-18=</b> 18" Length	<b>S=Standard</b> <b>H=High</b>	<b>30K=3000K</b> <b>35K=3500K</b>	<b>80=80</b> <b>90=90 (R9 50min)</b>	<b>STANDARD</b> <b>BA=Black Anodize</b> <b>PW=Powder Coat White</b>	<b>CABLES WITH CANOPY KITS</b> <b>ACW05=White Cord 5'</b> <b>ACW10=White Cord 10'</b> <b>ACB05=Black Cord 5'</b> <b>ACB10=Black Cord 10'</b>	<b>U=120-277V</b> <b>C=347V</b>	<b>SENSORS</b> <b>DMxx%=Daylight/Motion Sensor</b> (xx%= % Min. Dimming)
<b>LSTI-36=</b> 36" Length		<b>40K=4000K</b> <b>50K=5000K</b>		<b>PREMIUM</b> <b>RALxxxx= Powder Coat</b> RAL xxxx (Gloss Finish)	<b>CABLES WITH LOOPS</b> <b>ALW10=White Cord 10'</b> <b>ALB10=Black Cord 10'</b>		<b>OTHER</b> <b>NAT=Natatorium</b> <b>NPx=Nema Plug (Various)</b>
				<b>CUSTOM</b> <b>PO=Powder Other</b>	<b>OTHER</b> <b>RM = Rotational Mount</b>		

EXAMPLE: LSTI-18-S-35K-80-PW-ALW10-U-WG

\*\* See mounting details on page 2.

# PRELIMINARY