

INSTALLATION INSTRUCTIONS



THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
CE PRODUIT DOIT ETRE INSTALLE SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAIT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHERENTS.
DISCONNECT POWER PRIOR TO ANY INSTALLATION.
DEBRANCHEZ LE COURANT AVANT TOUTE INSTALLATION.
CAP ALL WIRING CONNECTIONS WITH UL APPROVED WIRE CONNECTORS.
COUVRIR TOUTES LES CABLES AVE DES CONNECTIONS APPROUVES (UL).
VERIFY SUPPLY VOLTAGE MEETS LUMINAIRE LABEL SPECIFICATIONS.
VERIFIEZ QUE LA TENSION SOIT COMPATIBLE AVEC LES CARACTERISTIQUES DU LUMINAIRE MARQUE SUR LETIQUETTE.
ALLOW FIXTURE TO COOL BEFORE TOUCHING HEATSINK OR LIGHT SOURCE.
LAISSEZ LE PROJECTEUR REFOIDIR AVANT DE TOUCHER LE RADIATEUR OU LA SOURCE DE LUMIERE.
DO NOT ATTEMPT TO OPEN OR MAKE REPAIRS INSIDE LUMINAIRE.
NE PAS TENTER DOUVRIER OU DE FAIRE DES REPARATINS A L'INTERIEUR DU LUMINAIRE.
AVOID DIRECT VIEWING OF LIGHT SOURCE.
EVITEZ DE REGARDER DIRECTMENT LA SOURCE LUMINEUSE.
THIS PRODUCT MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN.
CE PRODUIT DOIT ITRE INSTALLE PAR UN ELECTRICIEN QUALIFIE.
SUITABLE FOR UNDER-CABINET MOUNT.
ADAPTE POUR SOUS-CABINET MOUNT.
SUITABLE FOR DAMP LOCATION.
ADAOTE POUR DES ENDROITS HUMIDES.
SUITABLE FOR CONTINUOUS ROW MOUNTING.
ADAPTE POUR CONTINU ROW MONTAGE.









SLIM BEAM D BEAM D TALL BEAM D

Note: All pictures shown are of the Slim Beam D

INSTALLATION INSTRUCTIONS


Individual Pendant Mount (ACxxx)

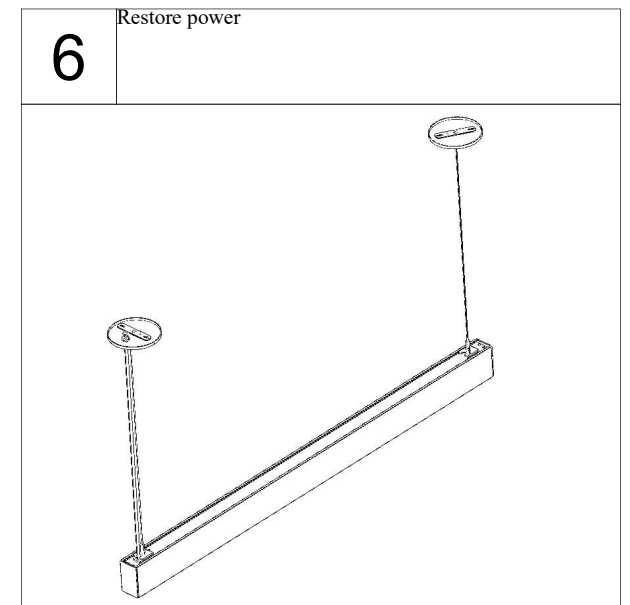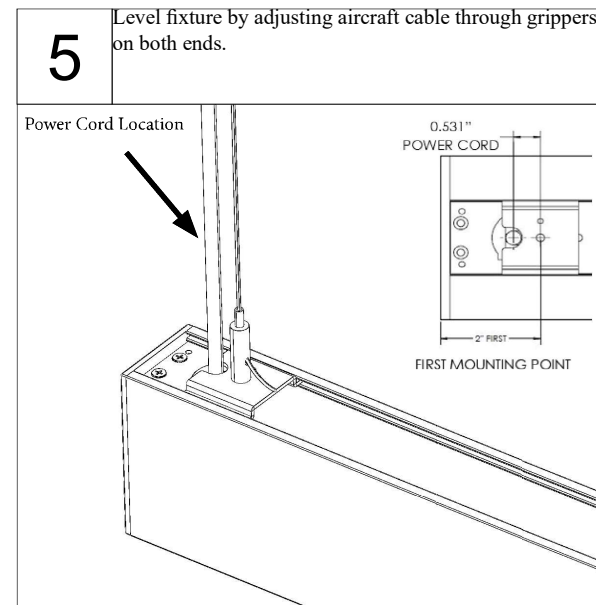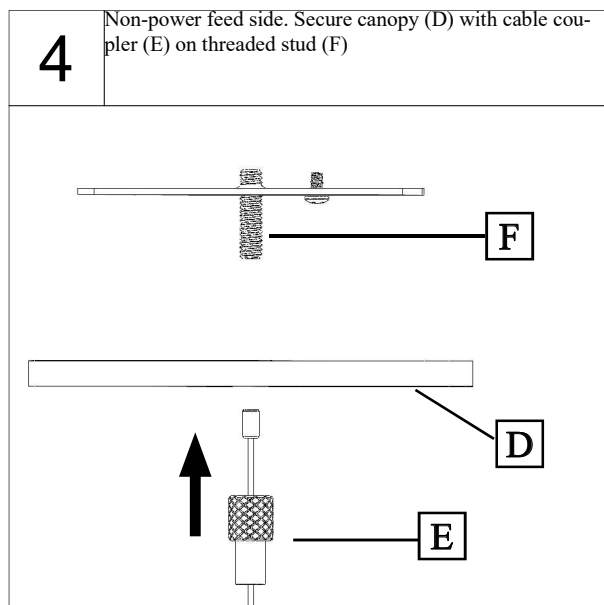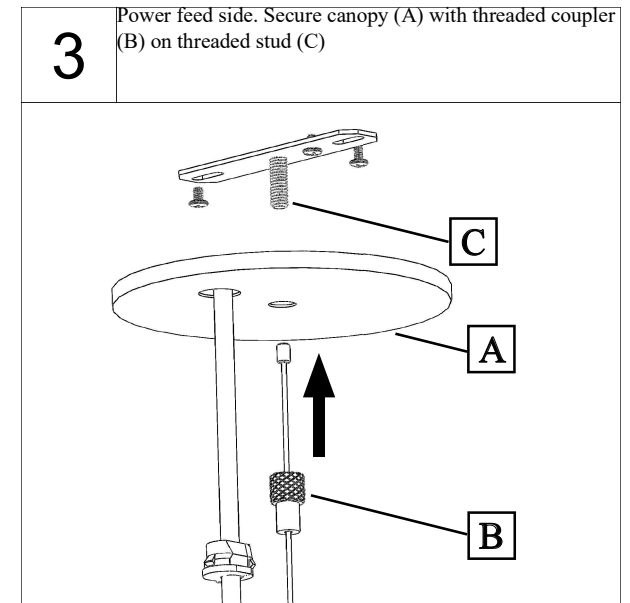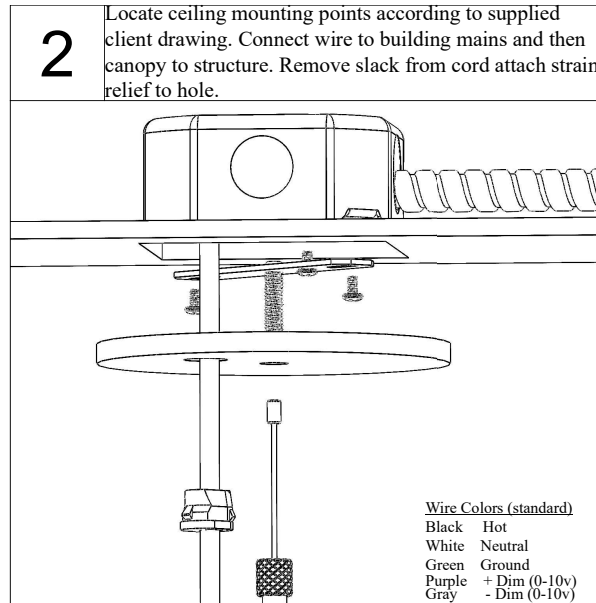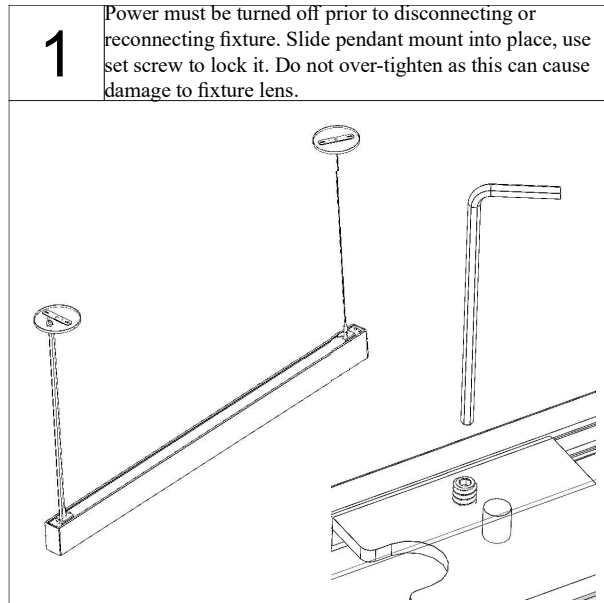


INSTALLATION INSTRUCTIONS

Continuous Pendant Mount Cont. (ACxxx)


- 1** Power must be turned off prior to disconnecting or reconnecting fixture. Hang Starting fixture. Note starting fixture has 2 mounts. Slide pendant mount into place, use set screw to lock it. Do not overtighten.

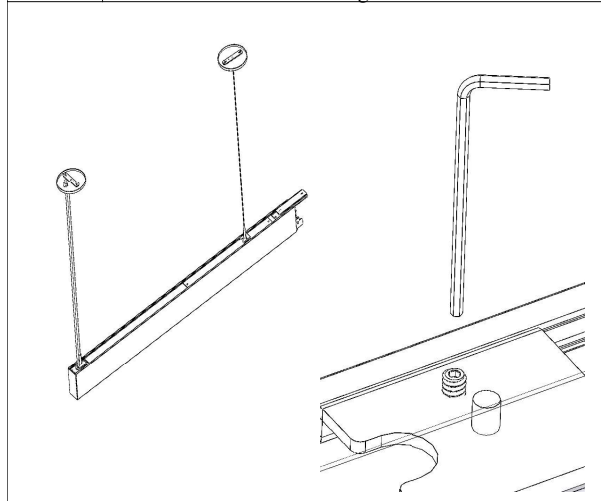


- 2** Locate ceiling mounting points according to supplied client drawing. Connect wire to building mains and then canopy to structure. Remove slack from cord attach strain relief to hole.

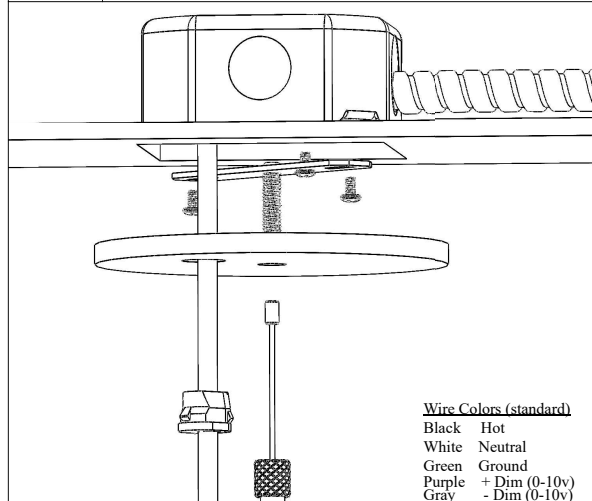


- 3** Power feed side. Secure canopy (A) with threaded coupler (B) on threaded stud (C)

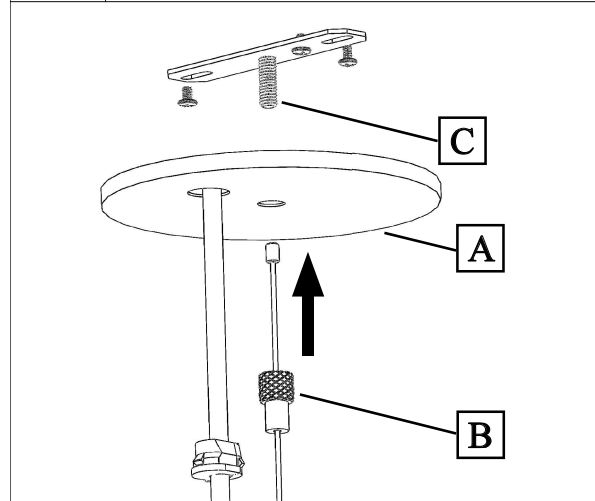


- 4** Non-power feed side. Secure canopy (D) with cable coupler (E) on threaded stud (F)

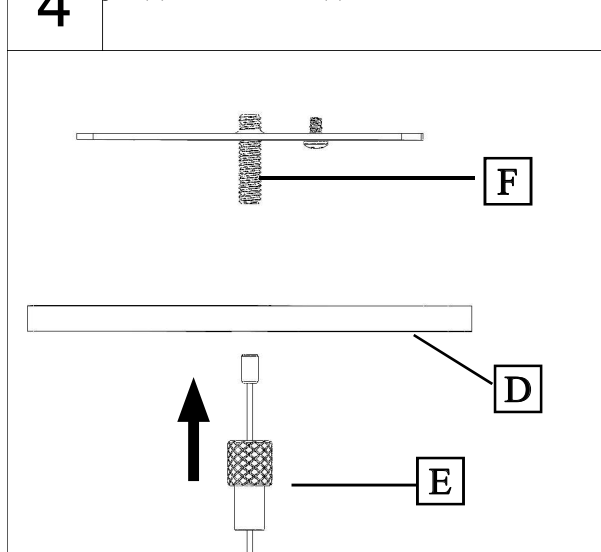

- 5** Level fixture by adjusting aircraft cable through grippers on both ends.






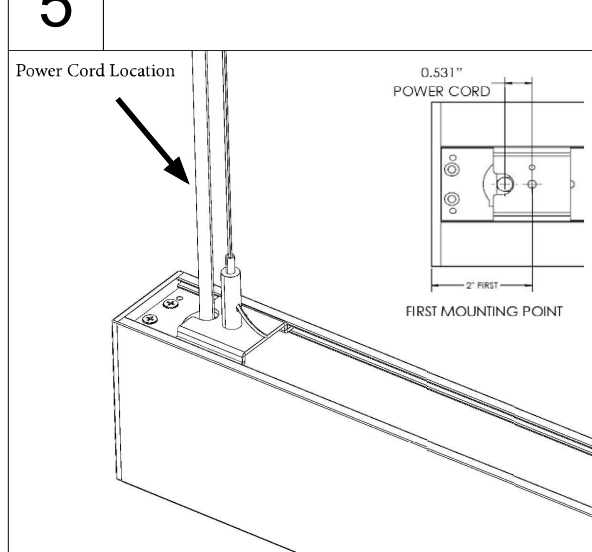


- 6** Hang middle fixture. Repeat steps 4-5. Middle fixture has one mount which should not exceed 8' from the last mounting location of starting fixture.

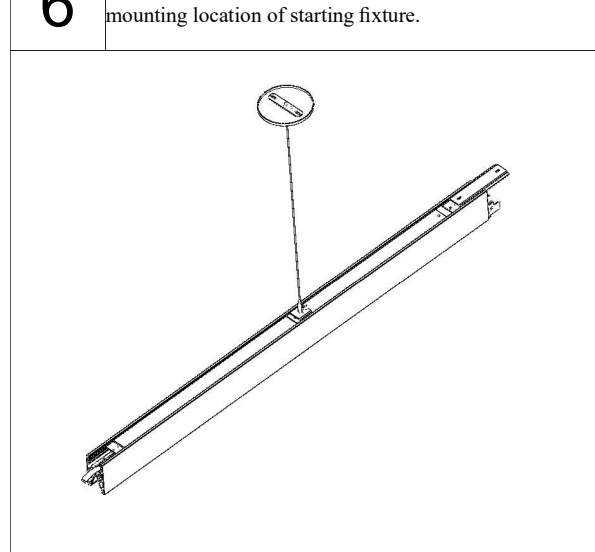

INSTALLATION INSTRUCTIONS

Continuous Pendant Mount Cont. (ACxxx)

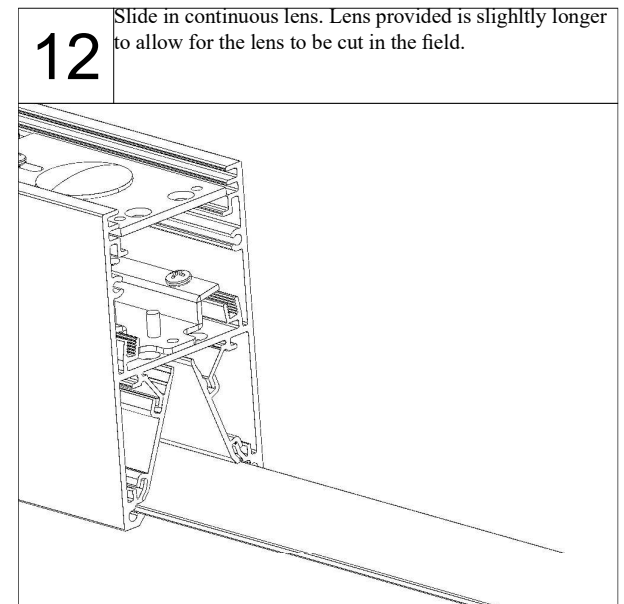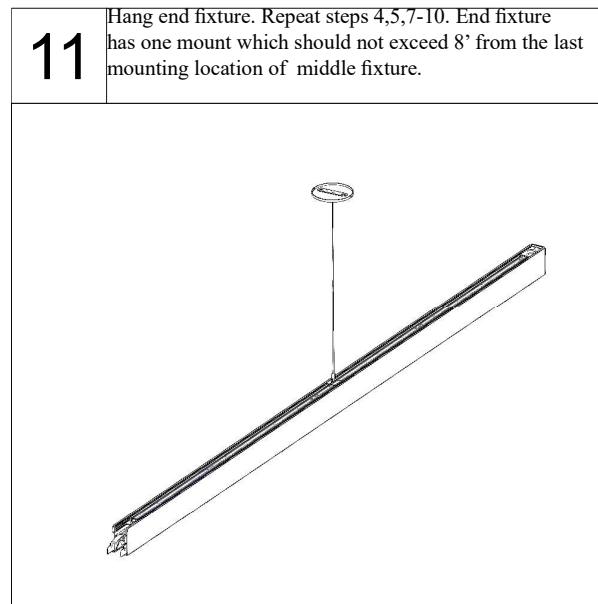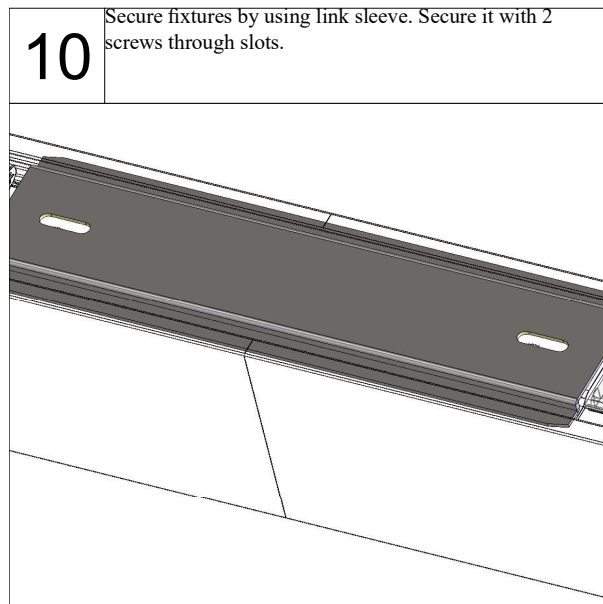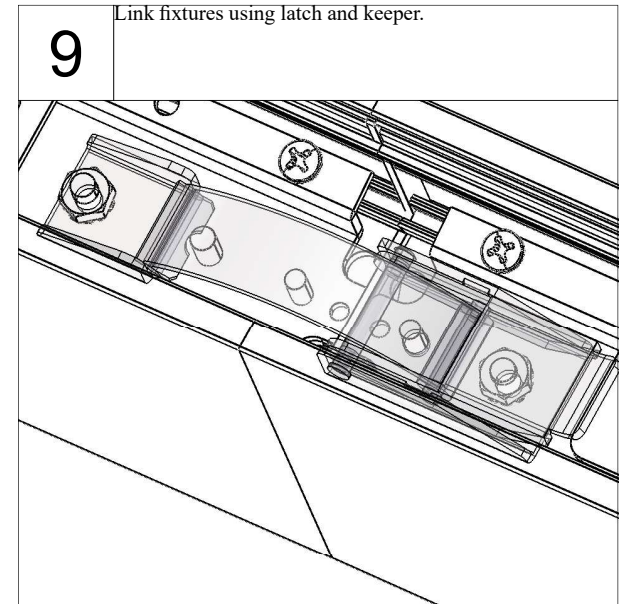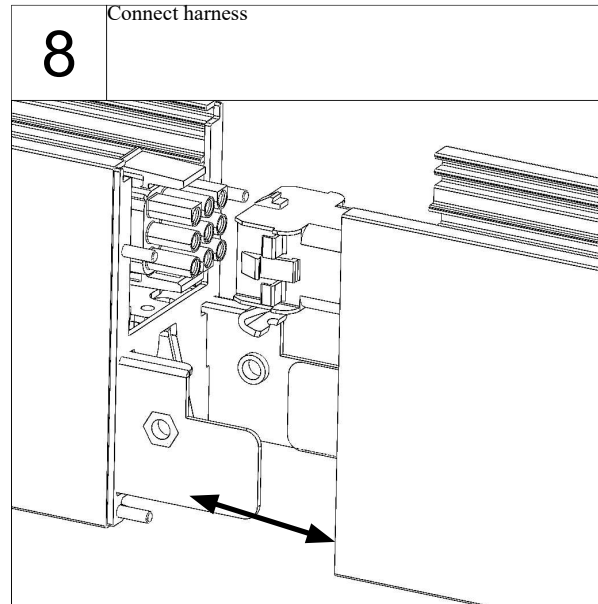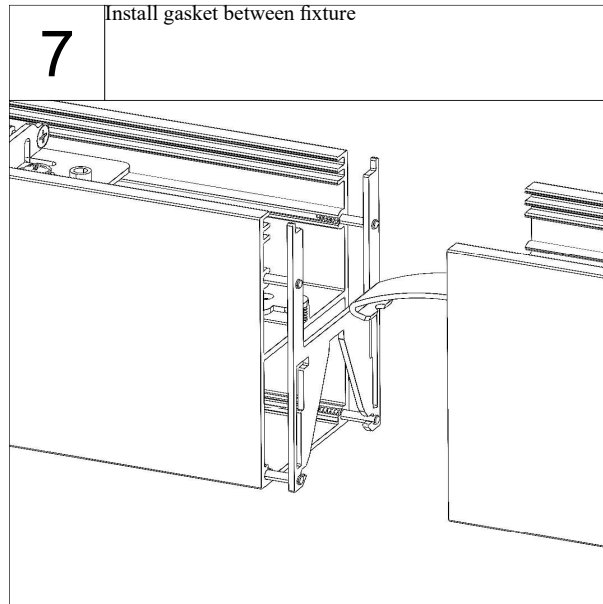


INSTALLATION INSTRUCTIONS

Continuous Pendant Mount Cont. (ACxxx)


13

Slide lens cutting guide over extra length of lens and secure with 2 screws. Don't over tighten screws as the slots are used for the end cap.

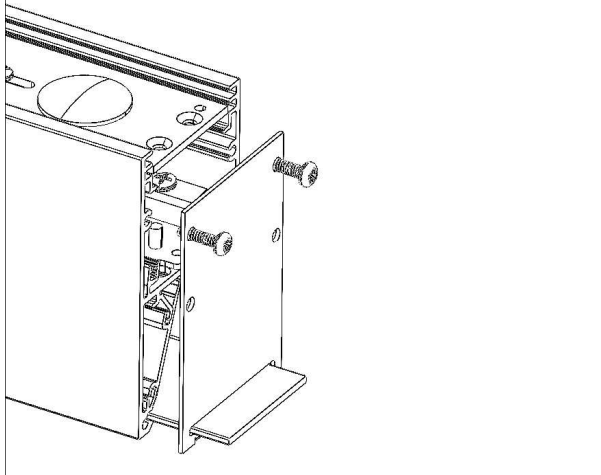


14

Scribe lens multiple times min of (10X). Apply pressure in upward direction to detach extra lens material. Remove lens cutting guide.

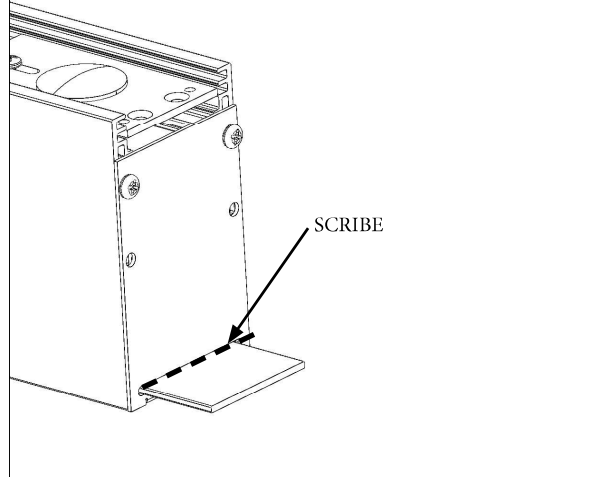


15

Install end cap with gasket on the end fixture with 2 screws.

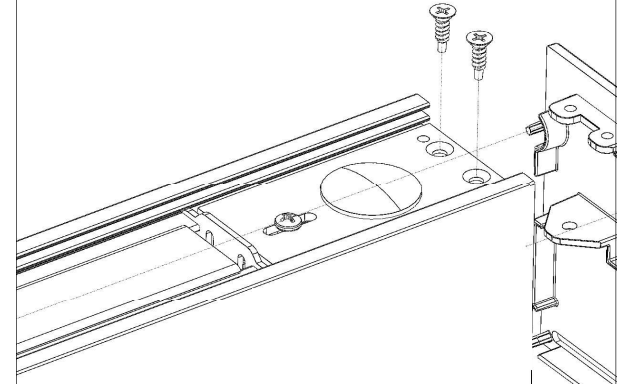

16


Restore power

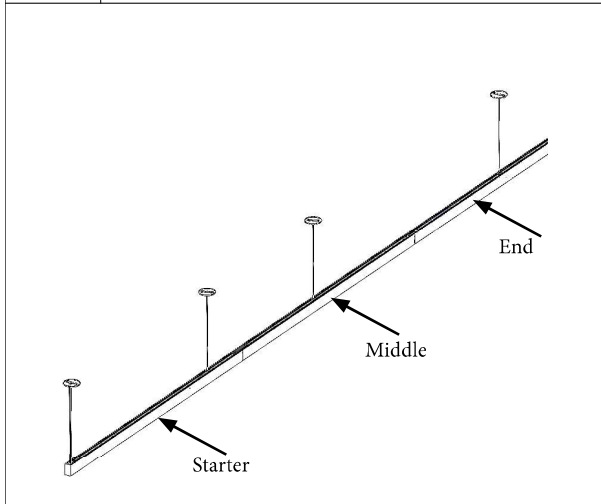


INSTALLATION INSTRUCTIONS

Individual Wall Mount (WM)


1 Power must be turned off prior to disconnecting or reconnecting fixture.

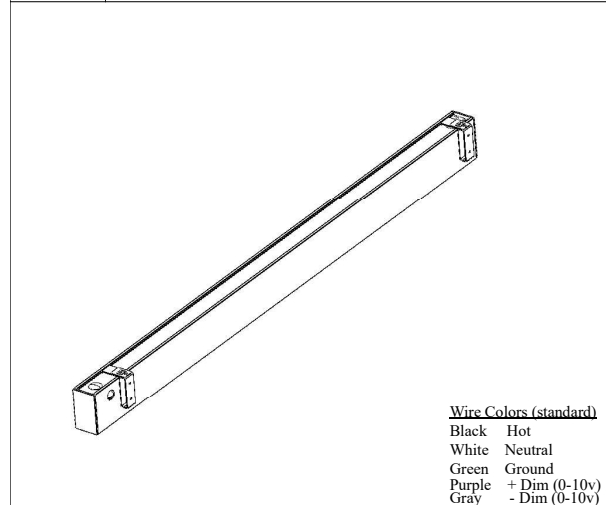


2 Remove top screw to release wall mount bracket.

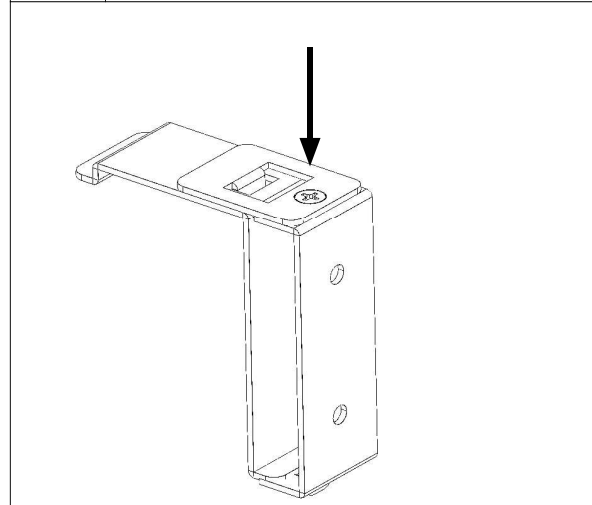


3 Locate mounting points according to supplied client drawing. Install brackets to wall.

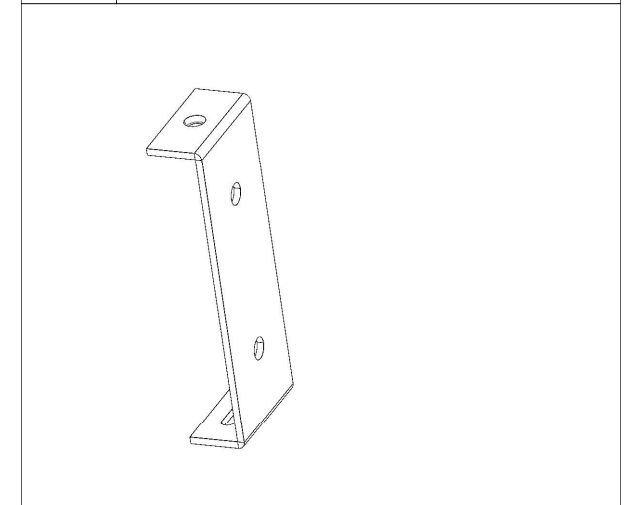


4 Connect fixture wiring to line power.

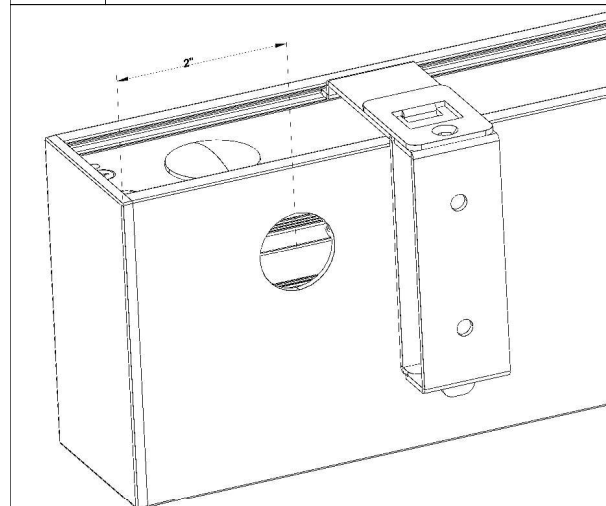

5

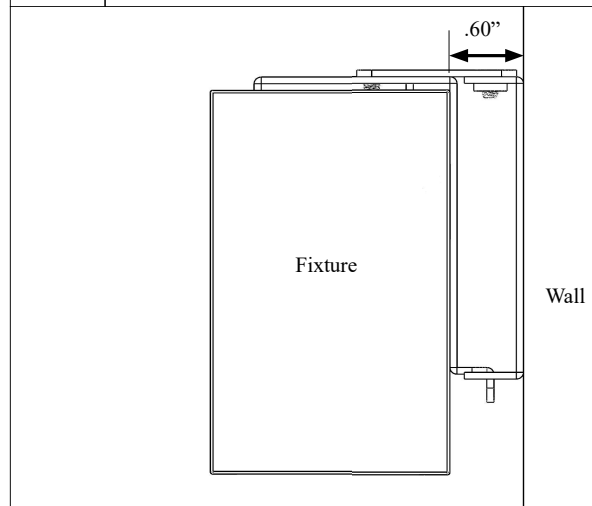

6 Restore power

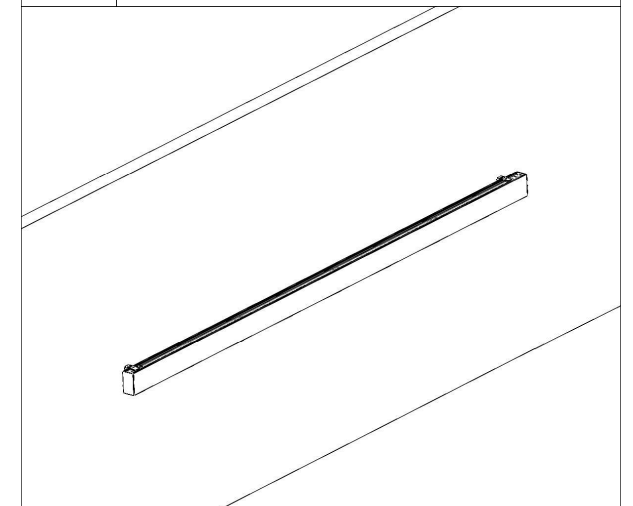


INSTALLATION INSTRUCTIONS


Continuous Wall Mount (WM)




1 Power must be turned off prior to disconnecting or reconnecting fixture.

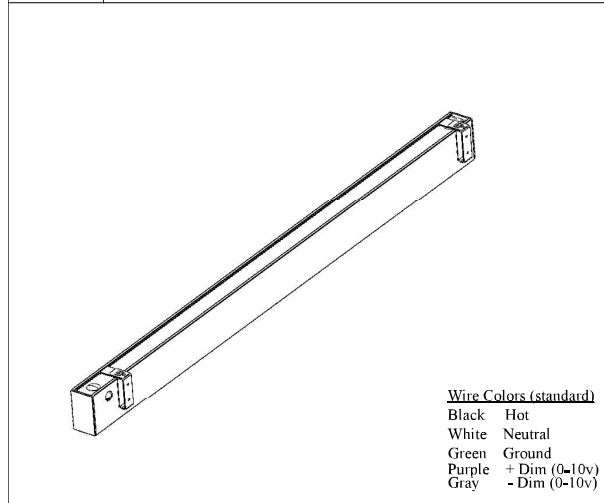


2 Remove top screw to release wall mount bracket.

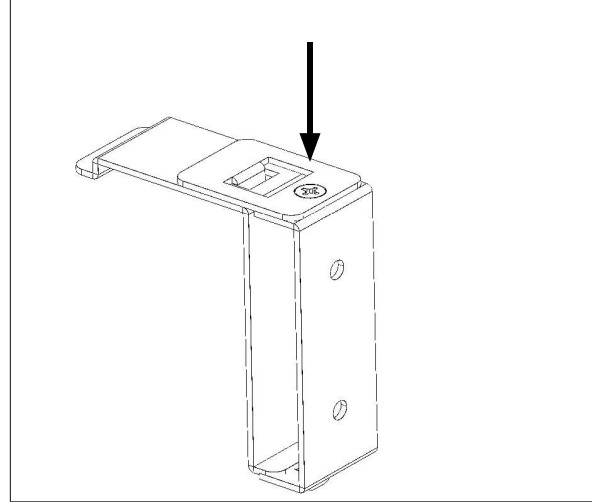


3 Locate mounting points according to supplied client drawing. Install brackets to wall.

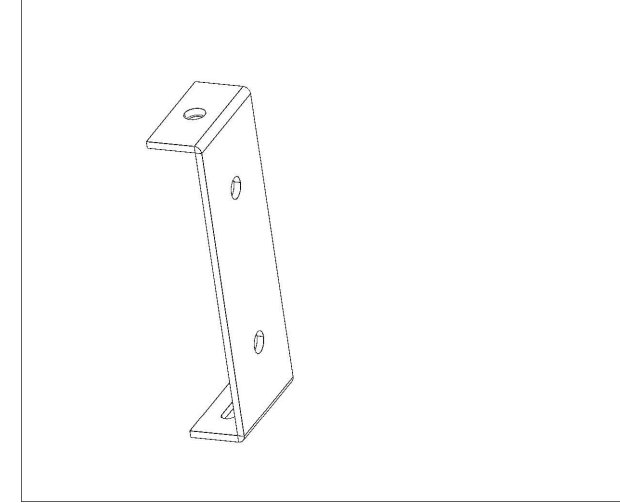


4 Connect fixture wiring to line power.

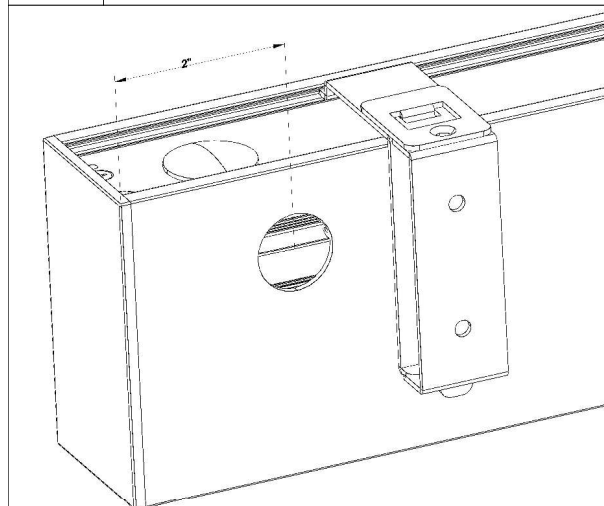

5






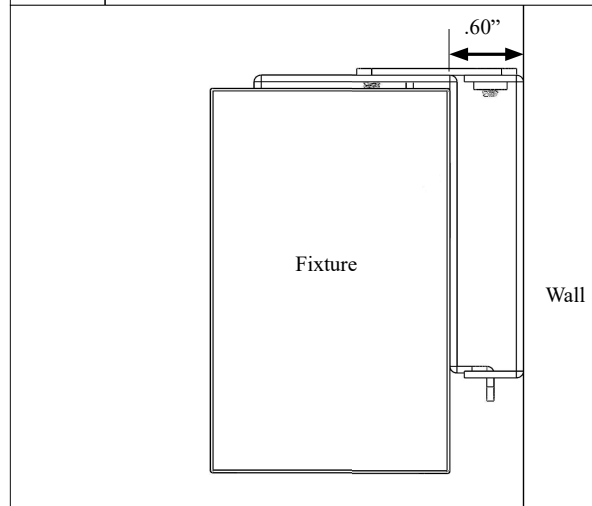


6 Hang middle fixture. Repeat steps 2-3.

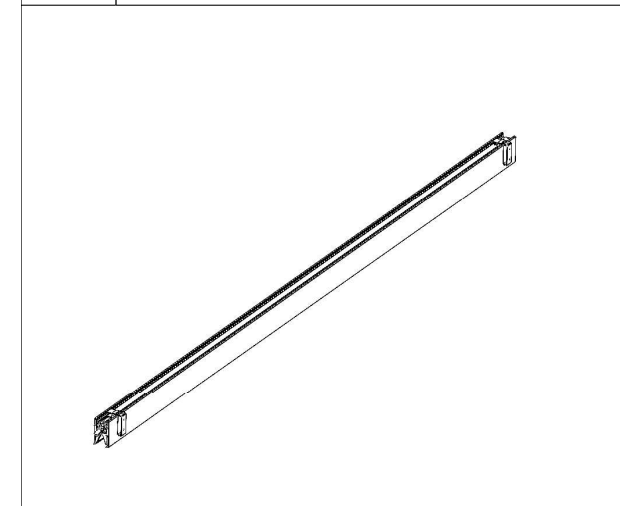

INSTALLATION INSTRUCTIONS

Continuous Wall Mount Cont. (WM)

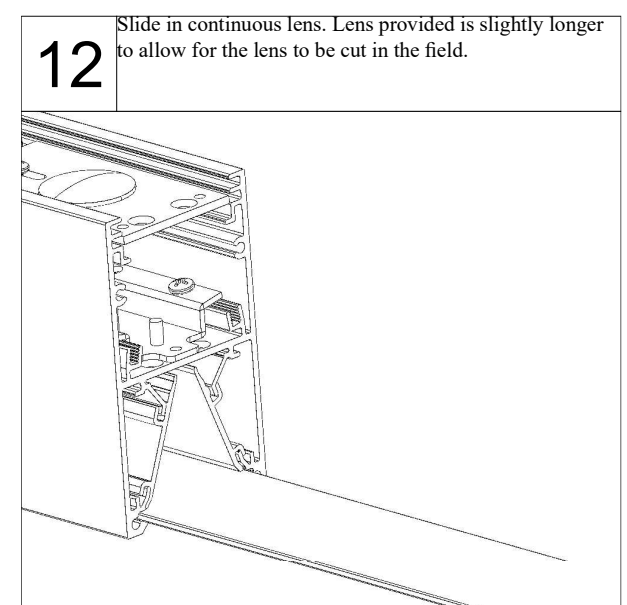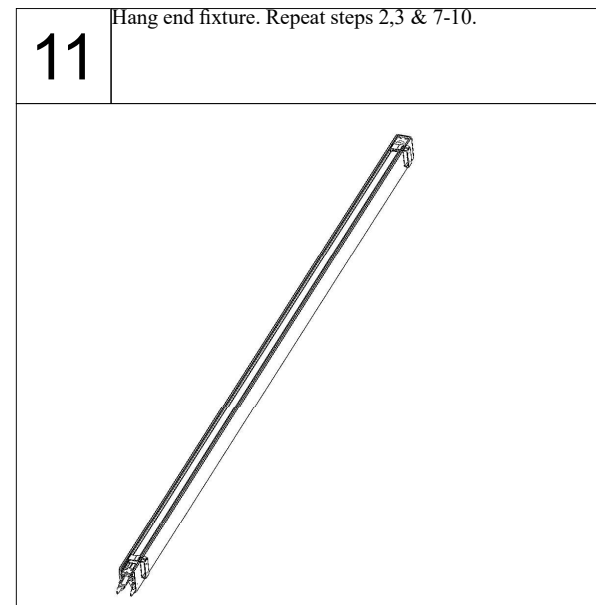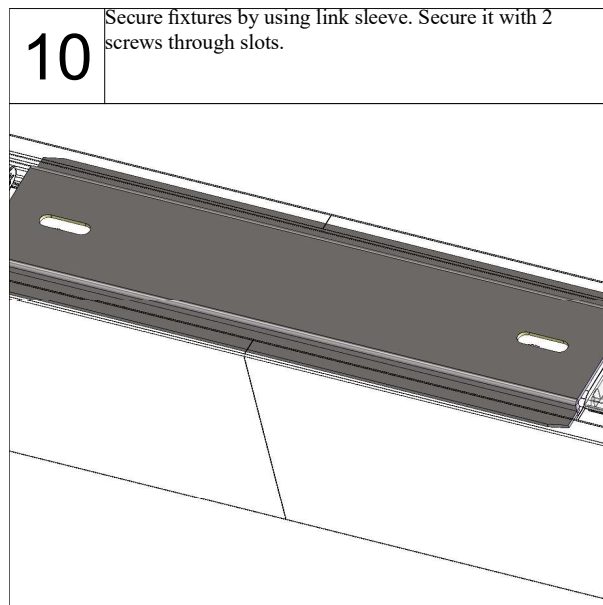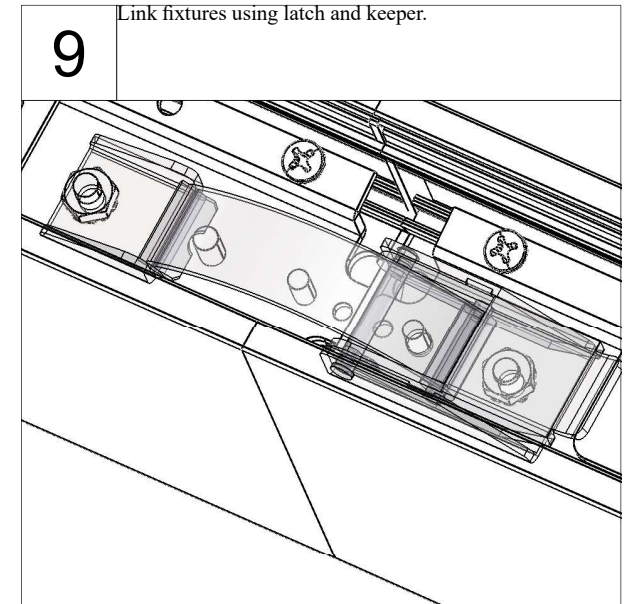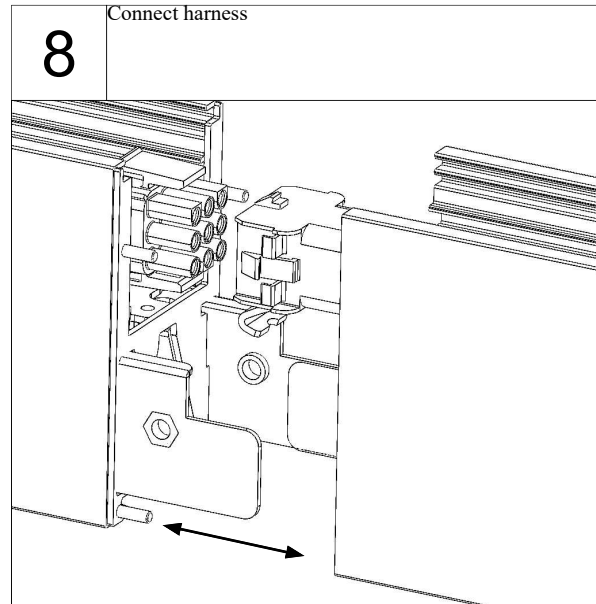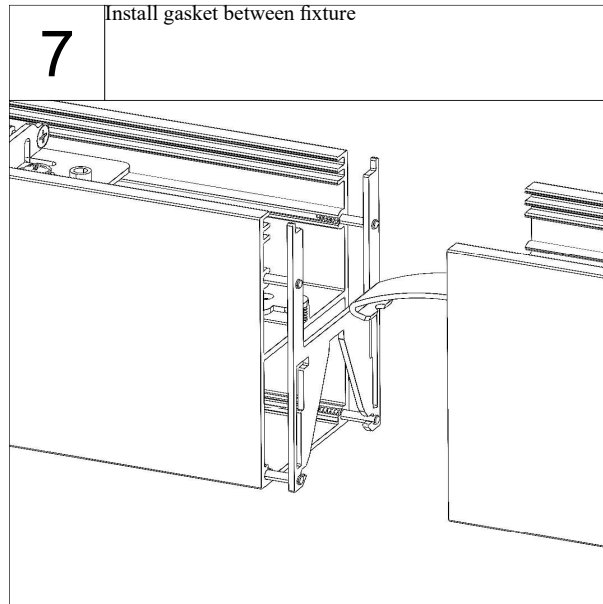


INSTALLATION INSTRUCTIONS

Continuous Wall Mount Cont. (WM)




13

Slide lens cutting guide over extra length of lens and secure with 2 screws. Don't over tighten screws as the slots are used for the end cap.

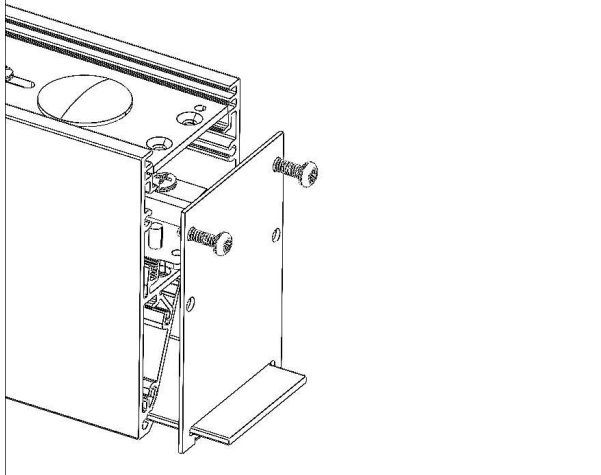


14

Scribe lens multiple times min of (10X). Apply pressure in upward direction to detach extra lens material. Remove lens cutting guide.

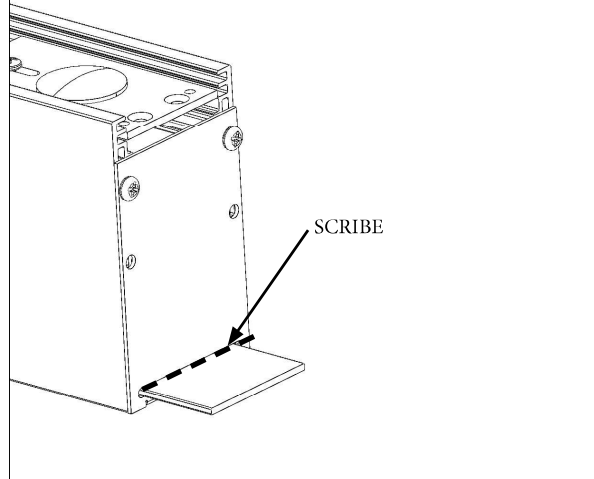


15

Install end cap with gasket on the end fixture with 2 screws.

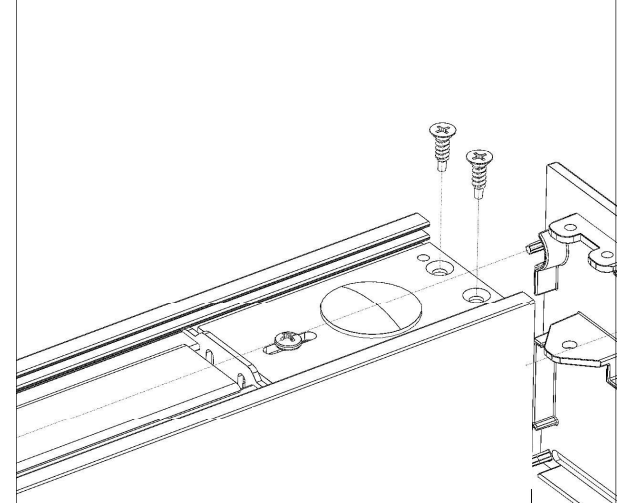

16

Restore power

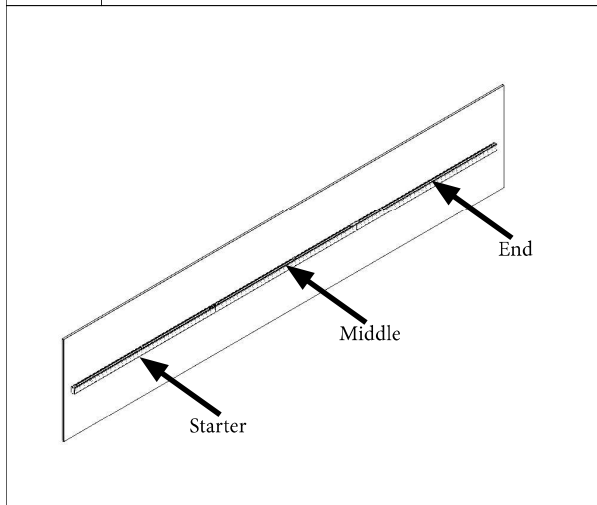


INSTALLATION INSTRUCTIONS


Individual Architectural Wall Mount (AWM)




1 Power must be turned off prior to disconnecting or reconnecting fixture. Locate mounting points according to supplied client drawing.

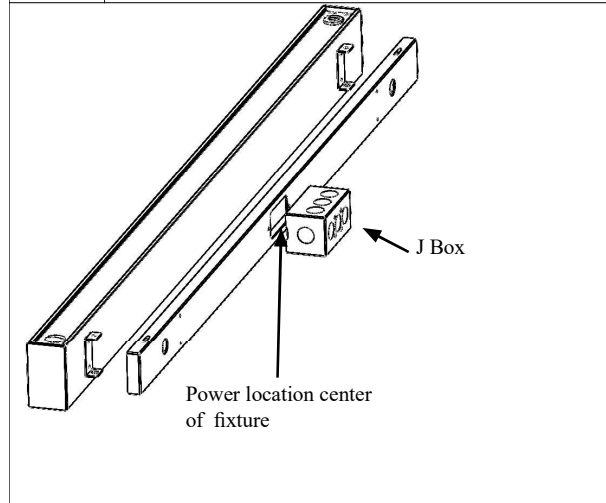


2 Remove wall mount bracket from fixture. Secure bracket to structure in desired locations.

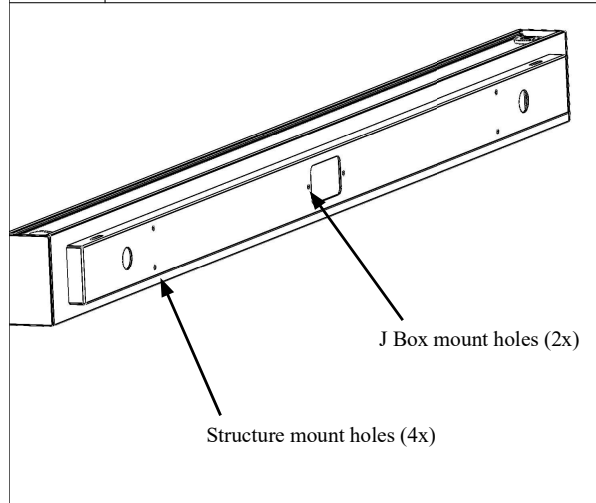


3 Connect fixture wiring to line power.

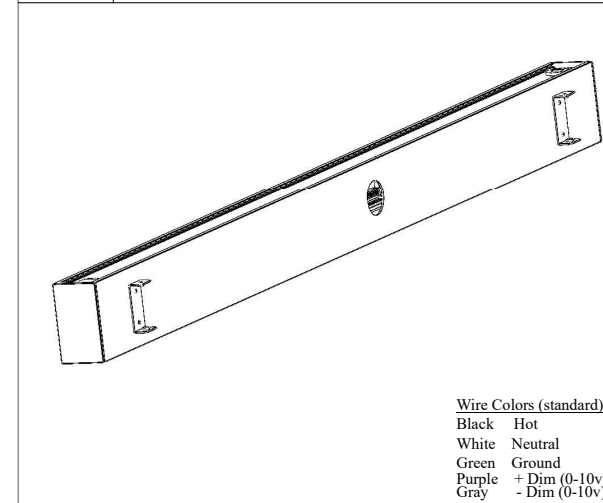

4 Use slots to center and secure fixture.

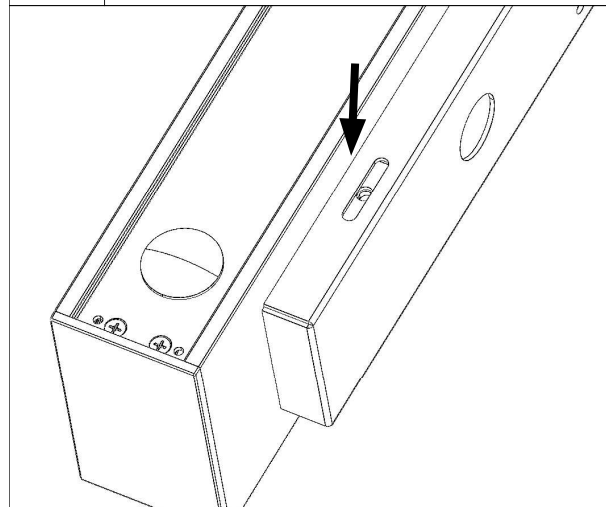


5 Restore power

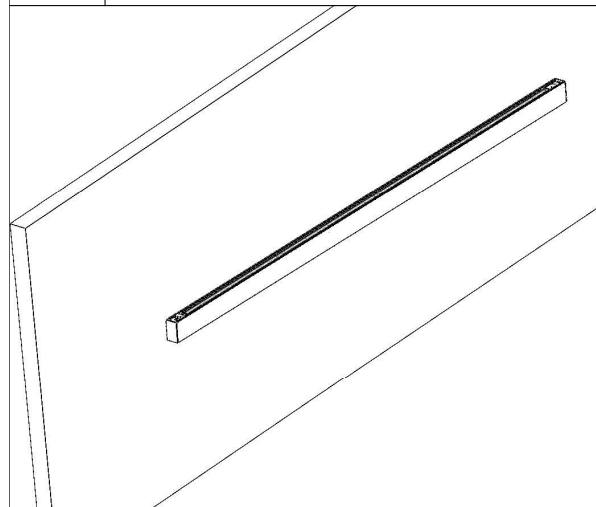


INSTALLATION INSTRUCTIONS

Continuous Architectural Wall Mount (AWM)


1 Power must be turned off prior to disconnecting or reconnecting fixture. Locate mounting points according to supplied client drawing.

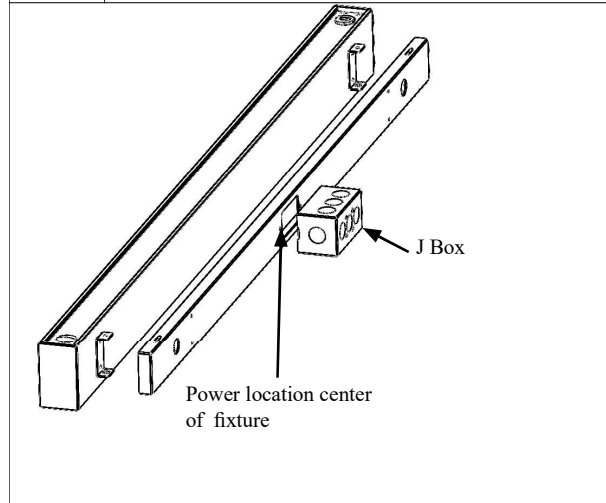


2 Remove wall mount bracket from fixture. Secure bracket to structure in desired locations.

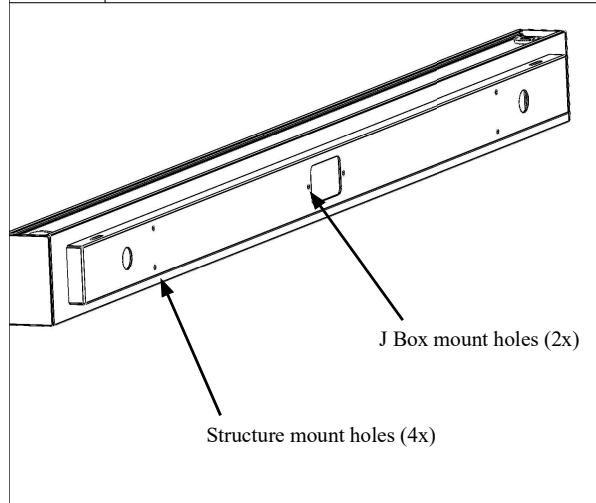


3 Connect fixture wiring to line power.

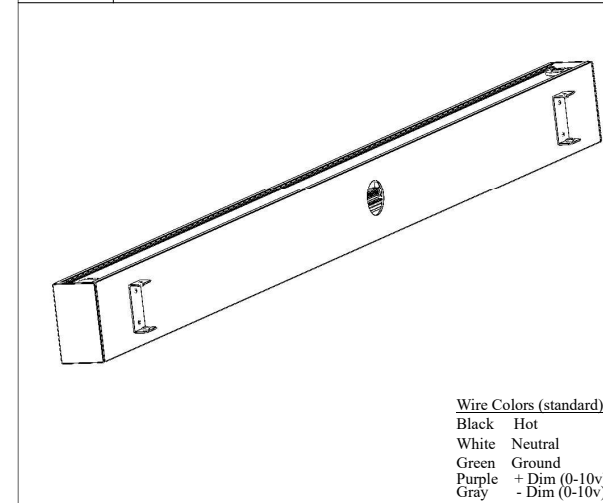


4 Use slots to center and secure fixture.

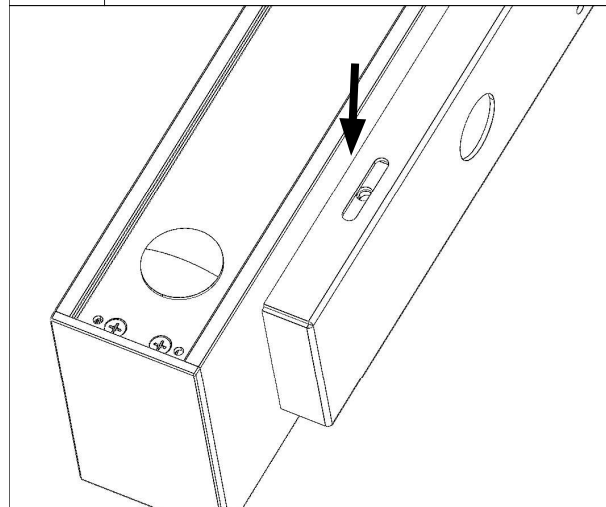

5 Hang middle fixture. Locate mounting points according to supplied client drawing. Repeat steps 2&4.






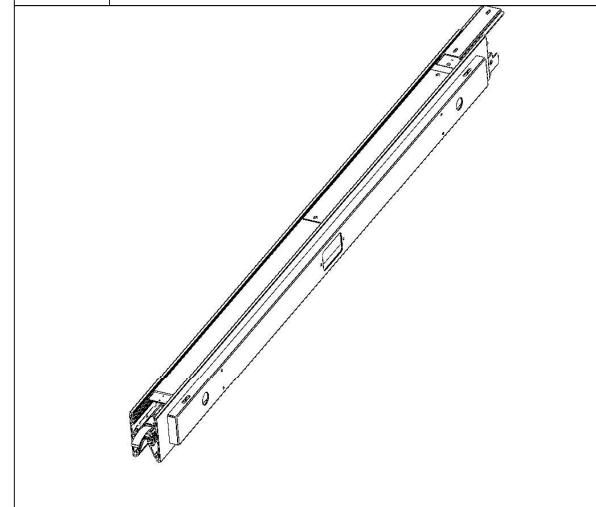


6 Install gasket between fixture

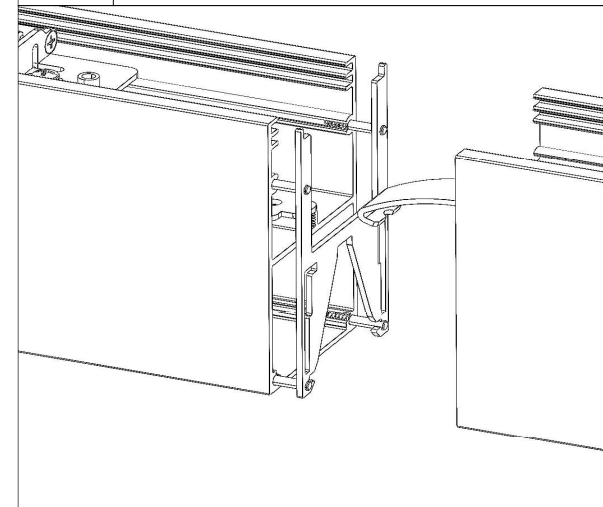




INSTALLATION INSTRUCTIONS

Continuous Architectural Wall Mount Cont. (AWM)

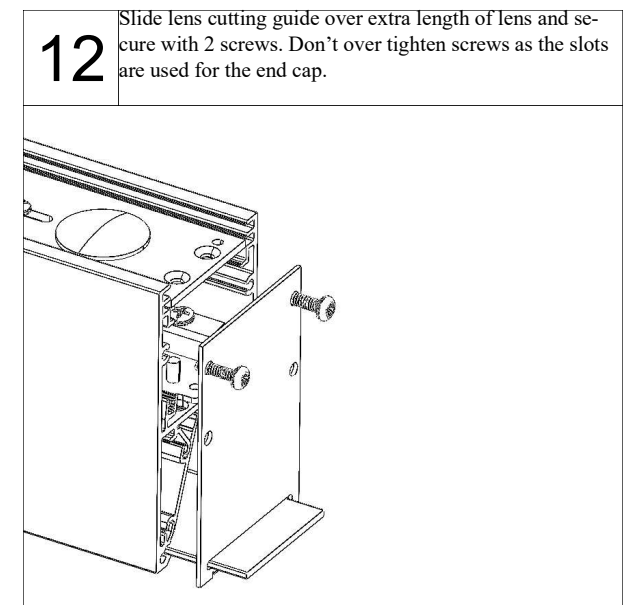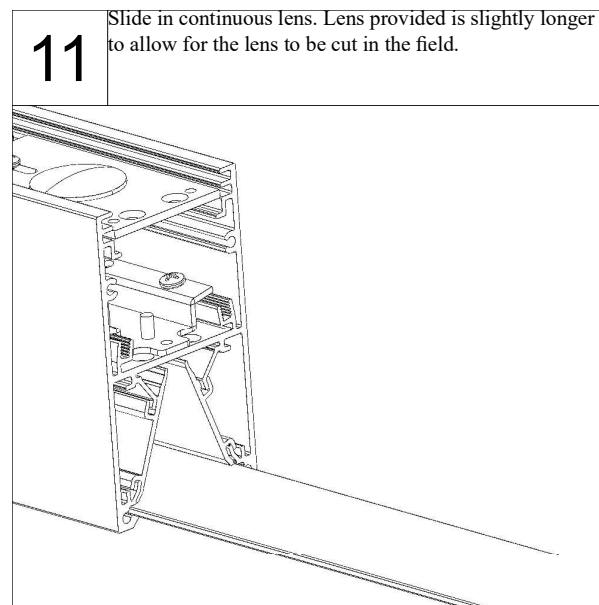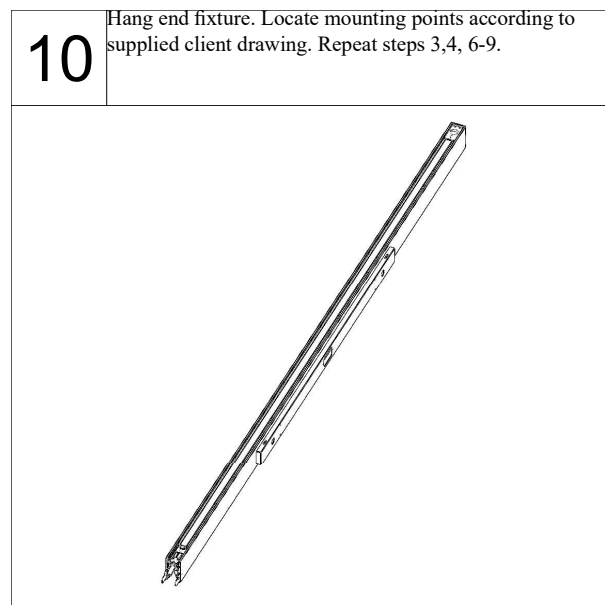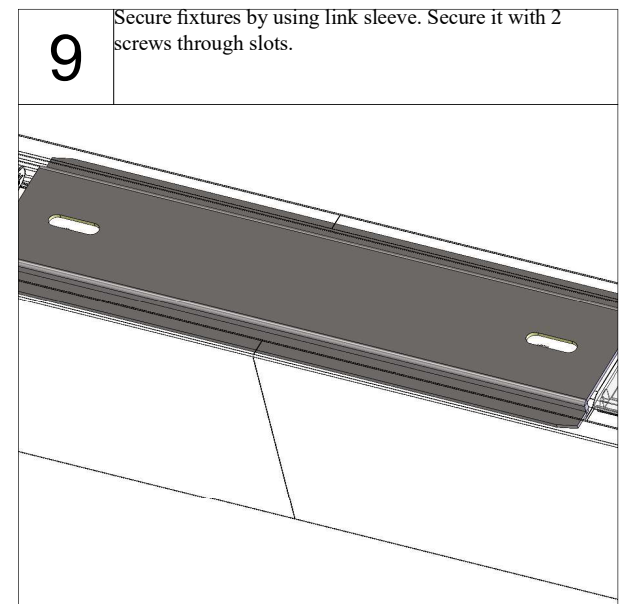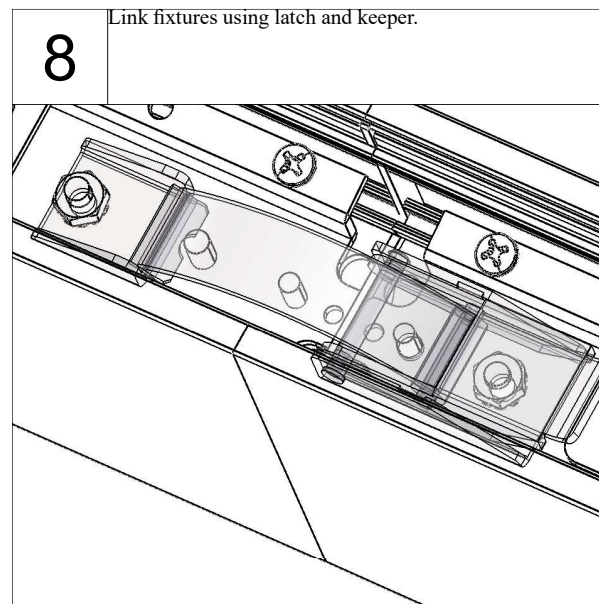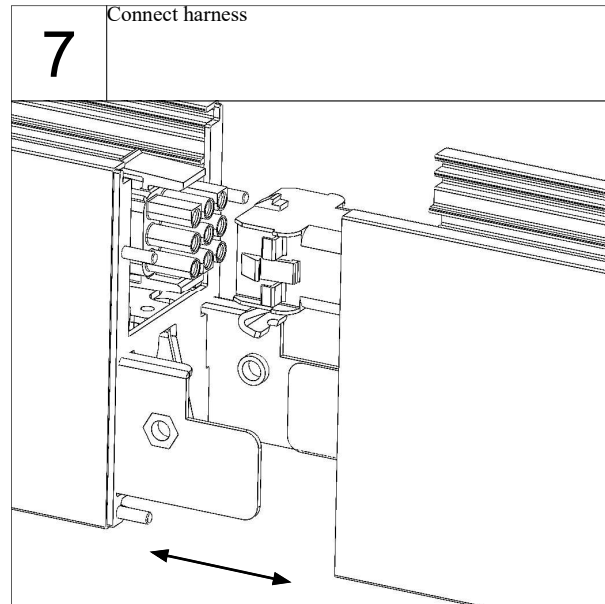

INSTALLATION INSTRUCTIONS


Continuous Architectural Wall Mount Cont. (AWM)

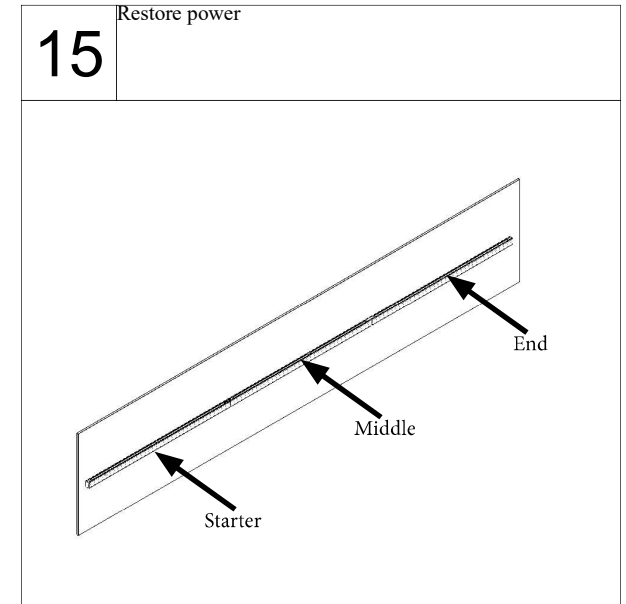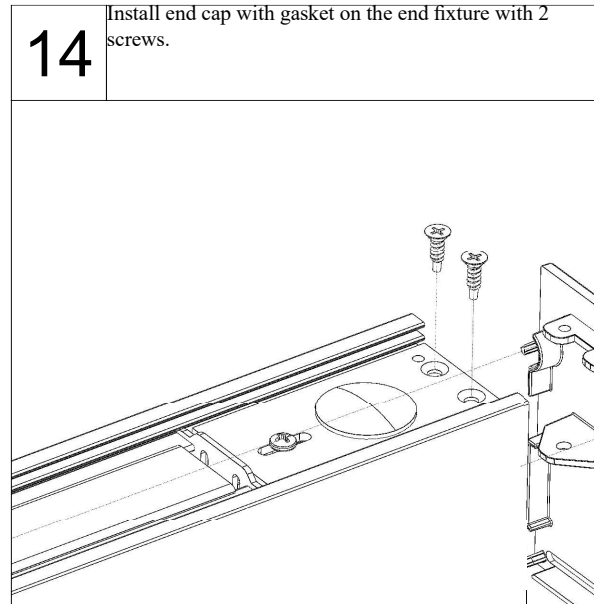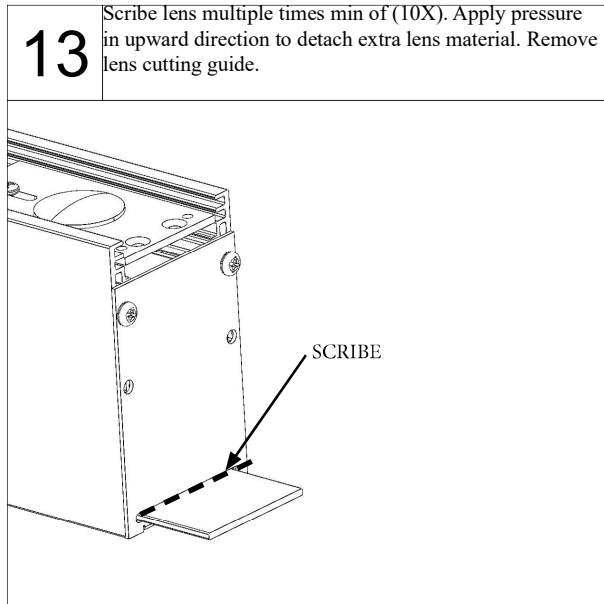


INSTALLATION INSTRUCTIONS

Extruded Wall Mount, Individual (EWM)


1 Collect a stem. Pull the two Cosmetic Covers off of the magnets holding them in place.

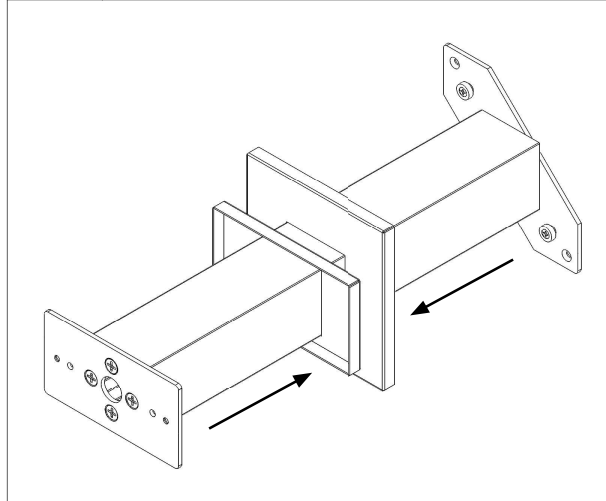


2 Locate the side of the fixture with the power inlet hole. Thread all wires through the stem. Then, using two countersink screws, affix the Mounting Plate shown to the fixture.

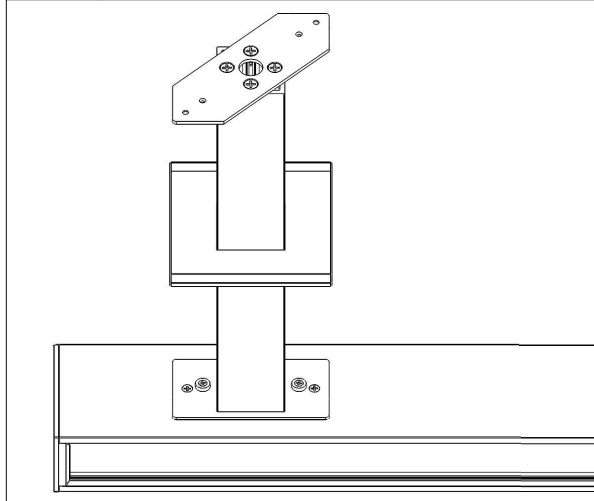


3 Wire the fixture to the Double Gang Junction Box. Using two countersink screws, affix the other Mounting Plate to the Double Gang Junction Box.

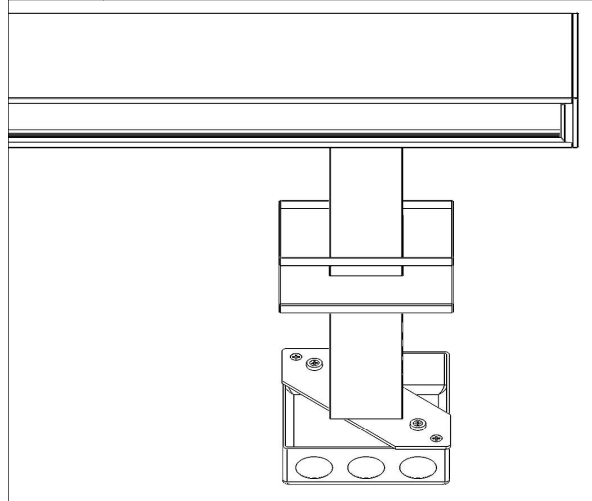

4 Slide the Cosmetic Covers back onto the magnets.






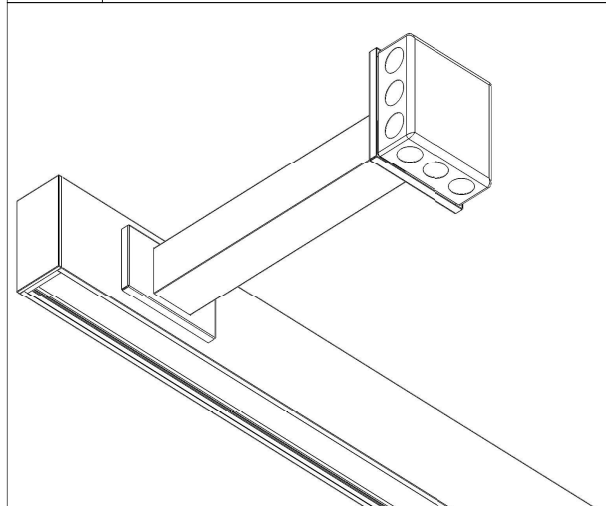


5 Repeat Steps 1-4 for each of the non-feed stems. If there is no Double Gang Junction Box at a location, the Mounting Plate may be affixed directly to the wall with self-threading screws.

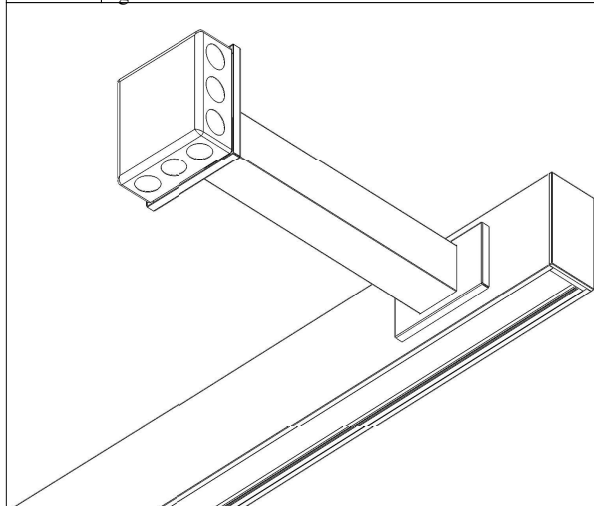







INSTALLATION INSTRUCTIONS

Extruded Wall Mount, Continuous (EWM)

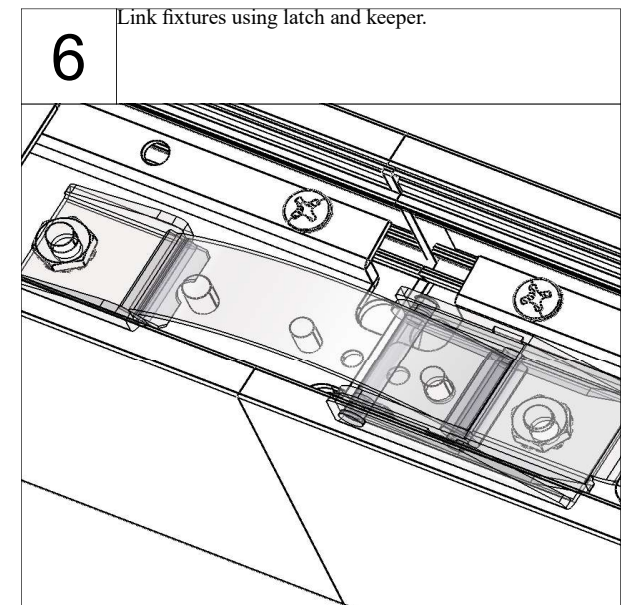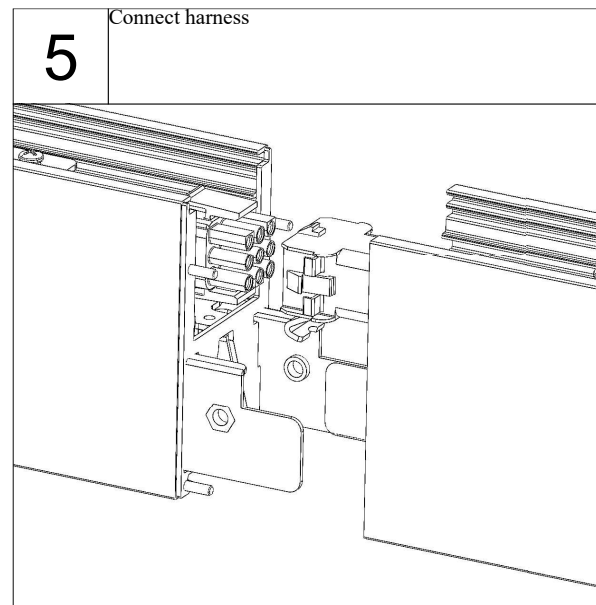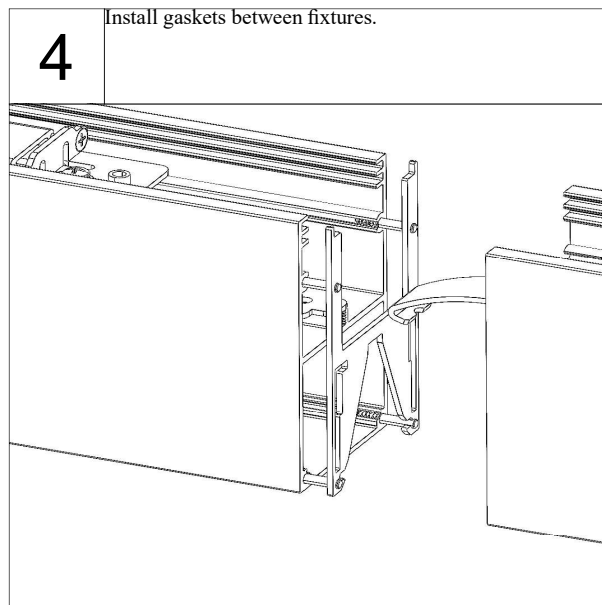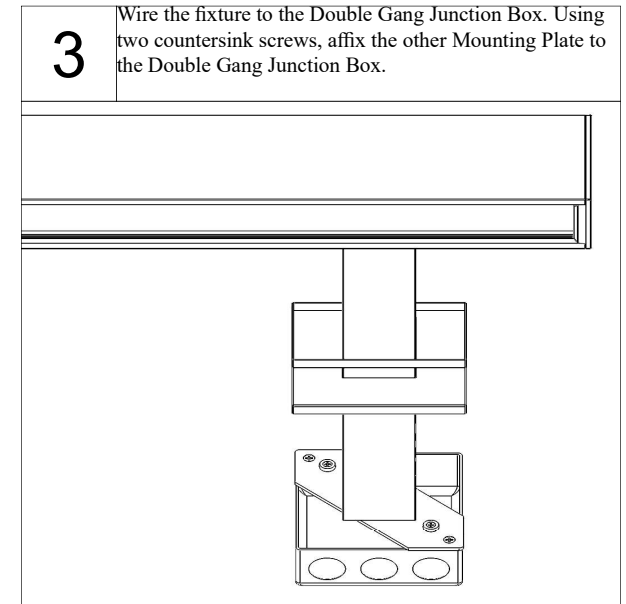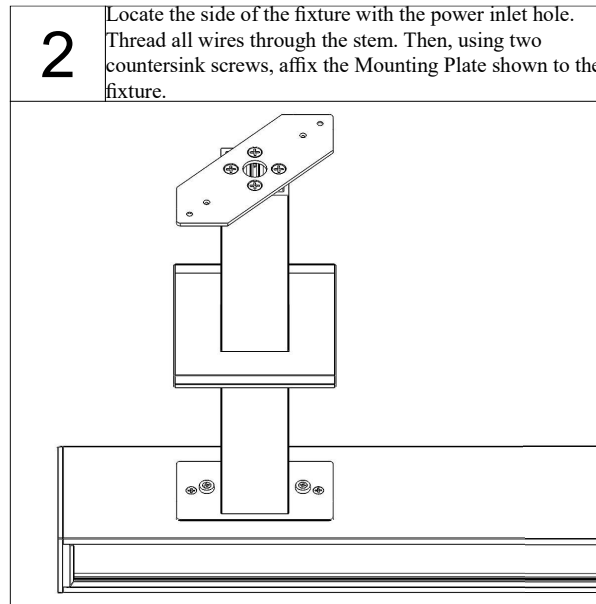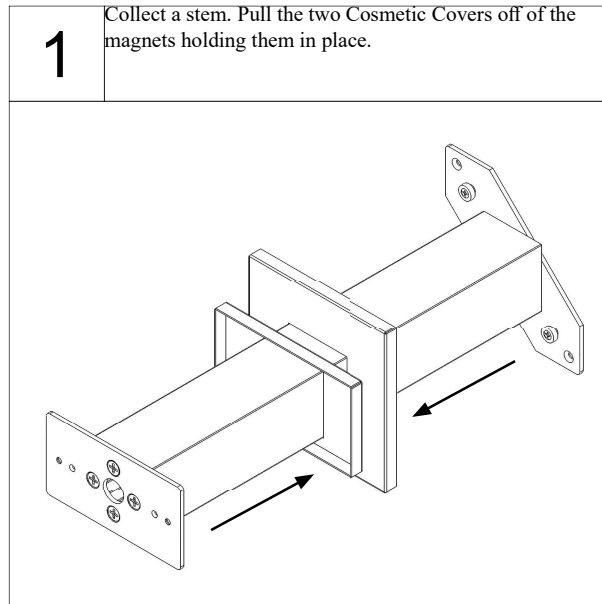




INSTALLATION INSTRUCTIONS

Extruded Wall Mount, Continuous (EWM)

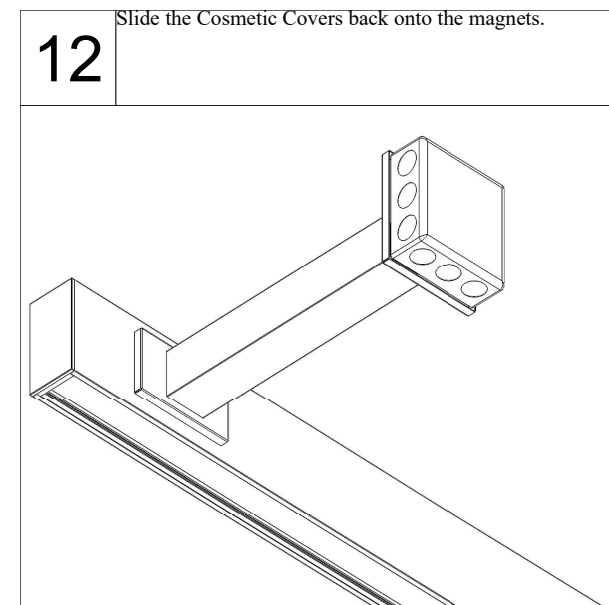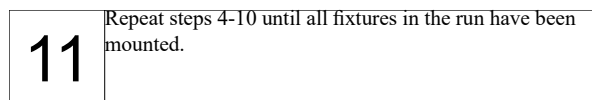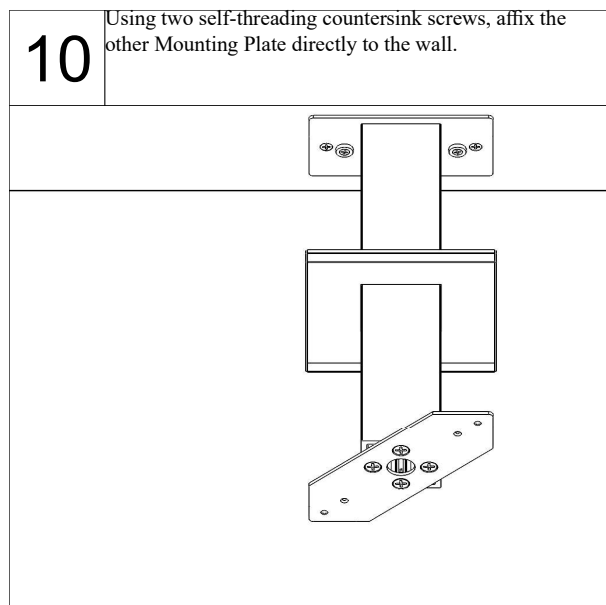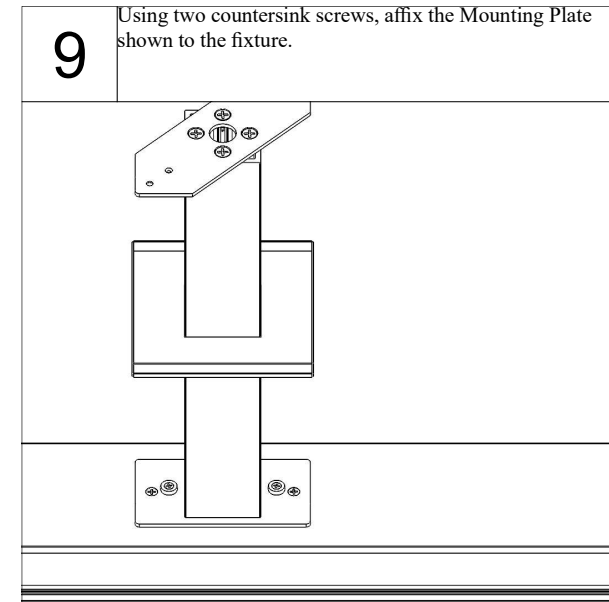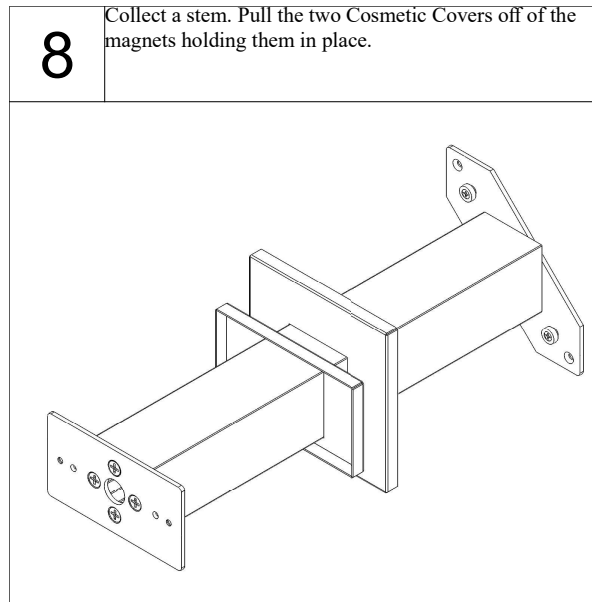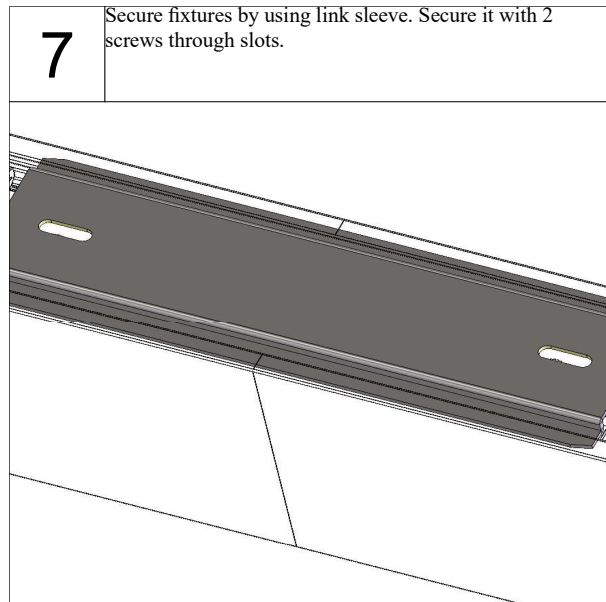







INSTALLATION INSTRUCTIONS

Extruded Wall Mount, Continuous (EWM)

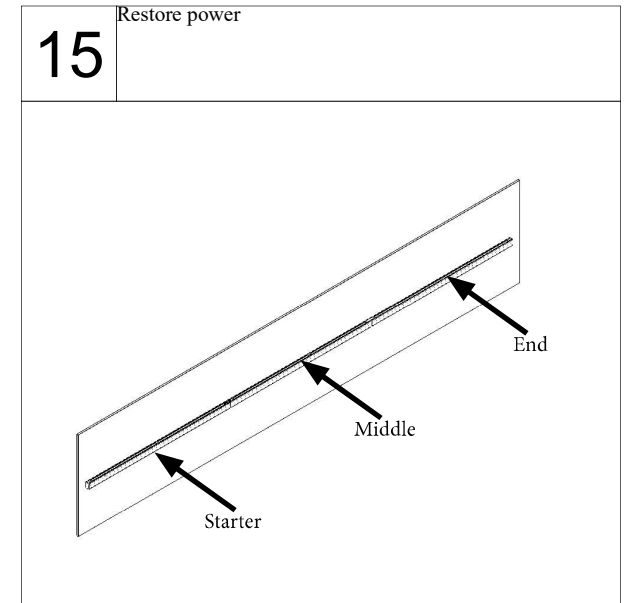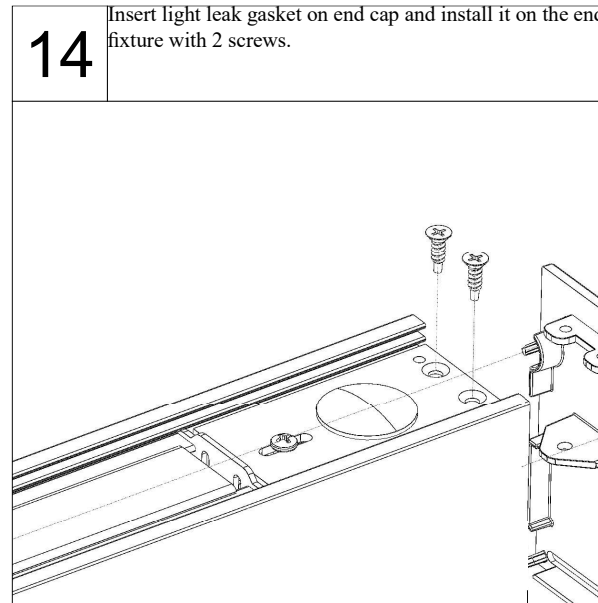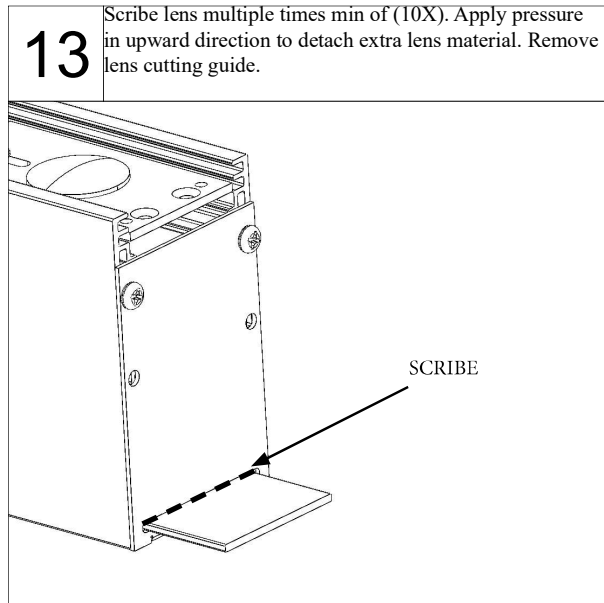







INSTALLATION INSTRUCTIONS

Individual Stem With Canopy (STEMxxx)

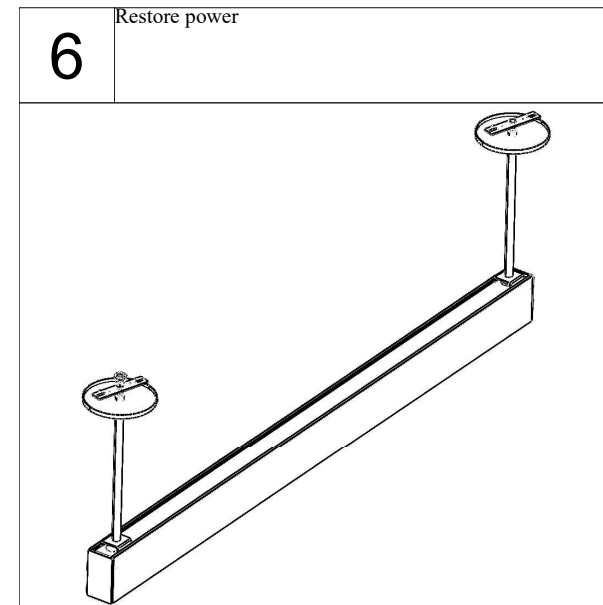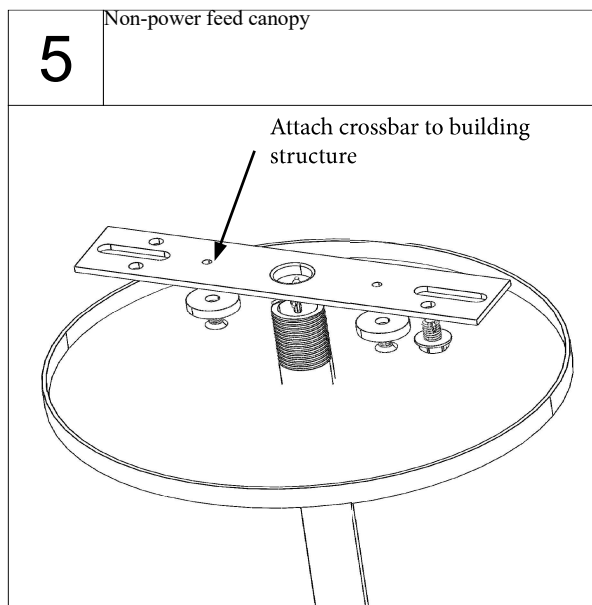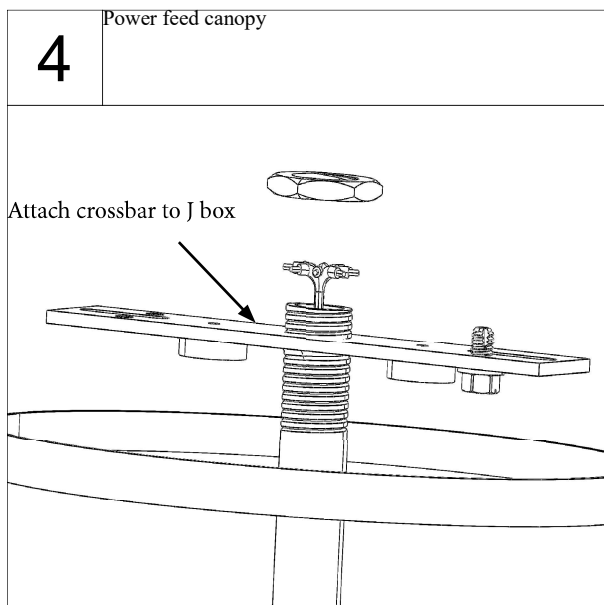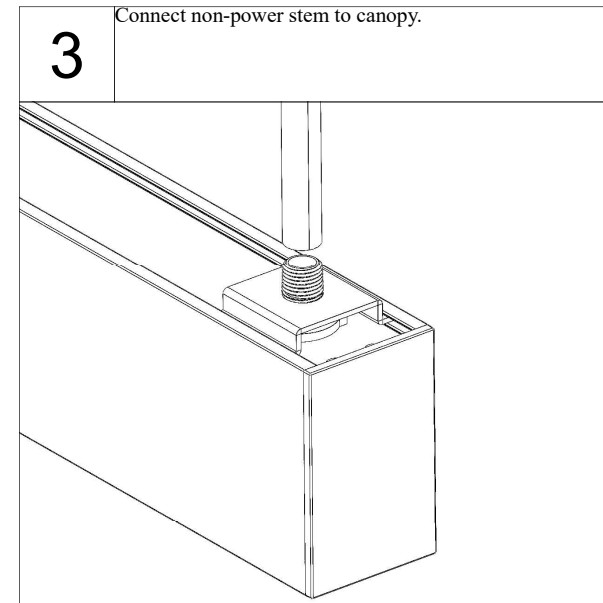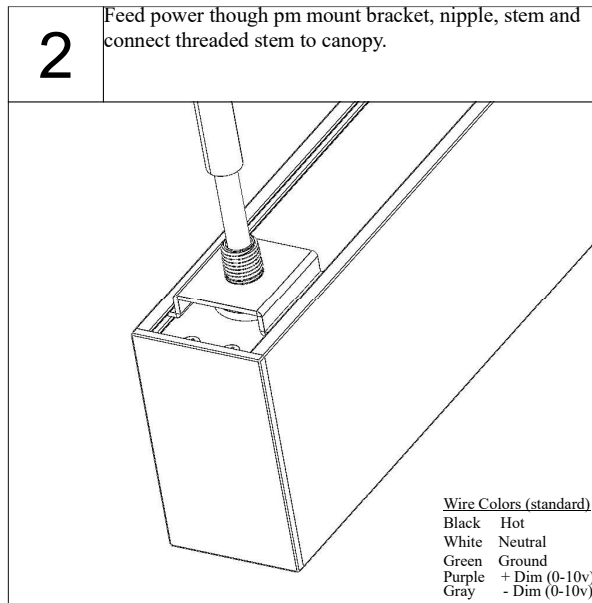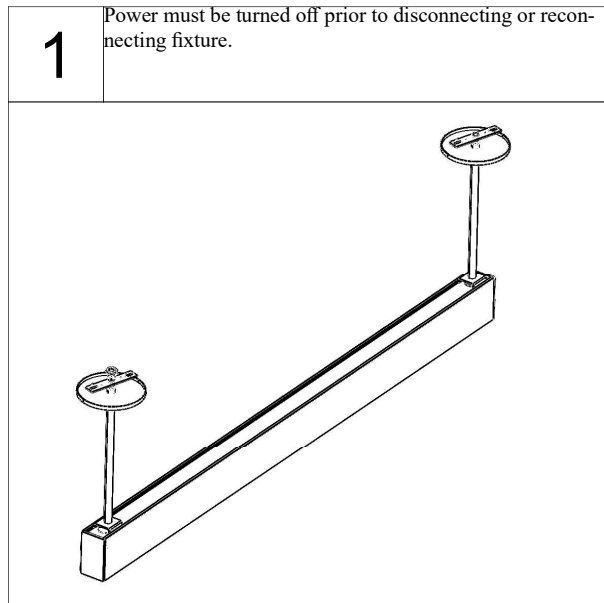







INSTALLATION INSTRUCTIONS

Continuous Stem With Canopy (STEMxxx)

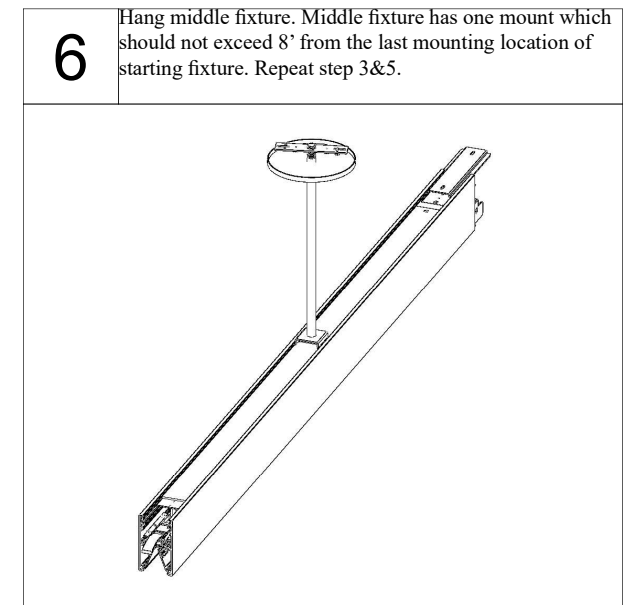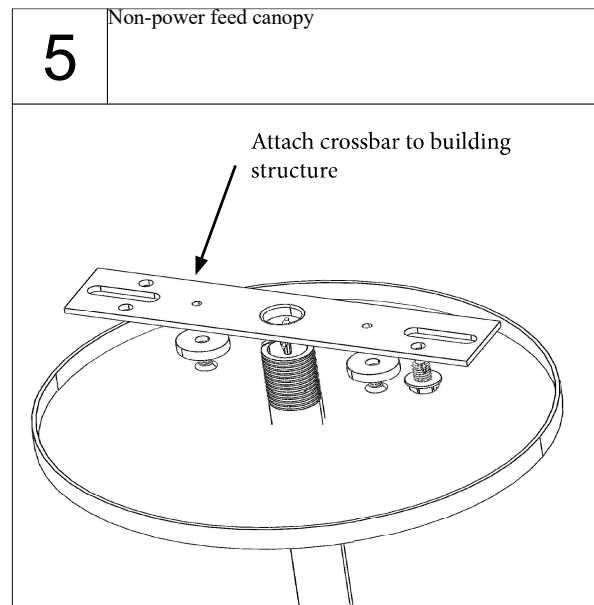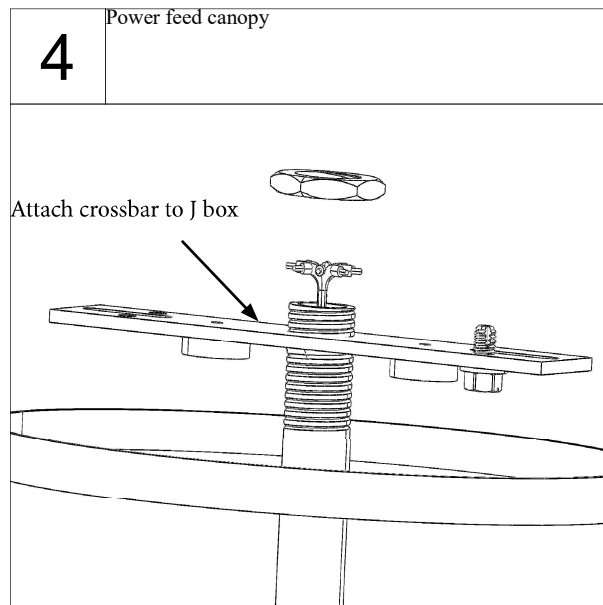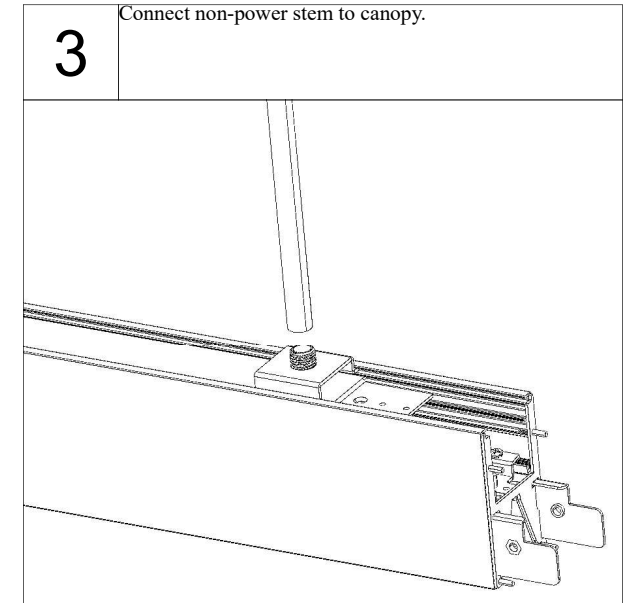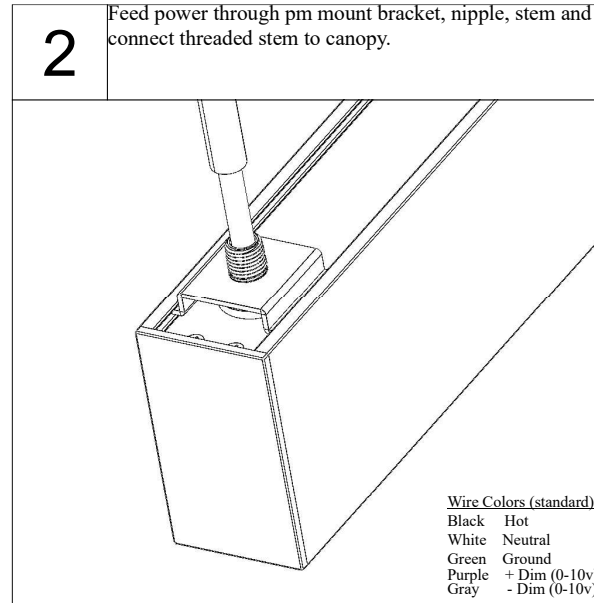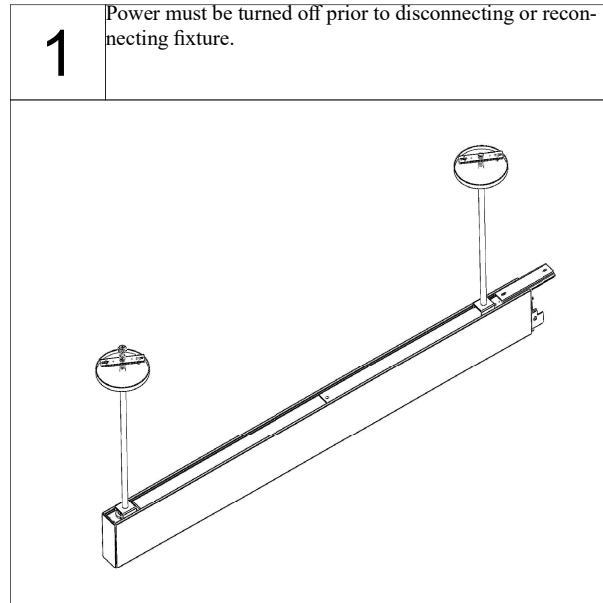

INSTALLATION INSTRUCTIONS

Continuous Stem With Canopy Cont. (STEMxxx)

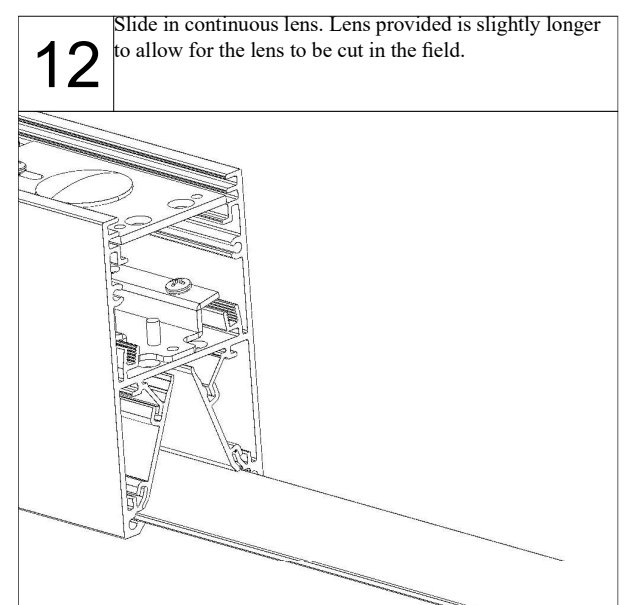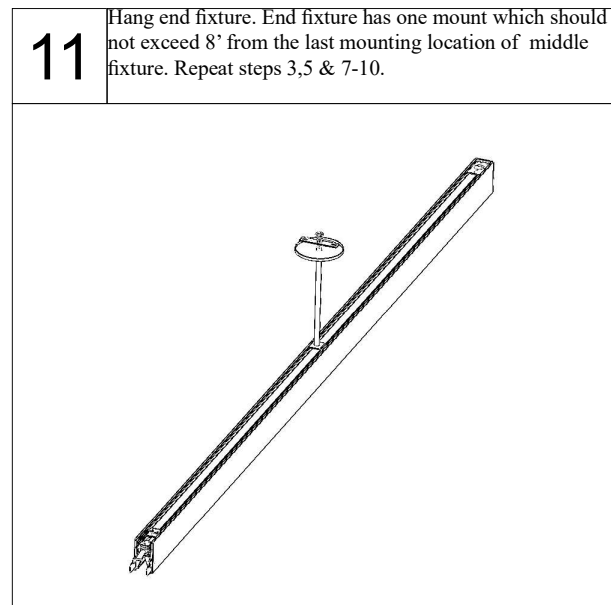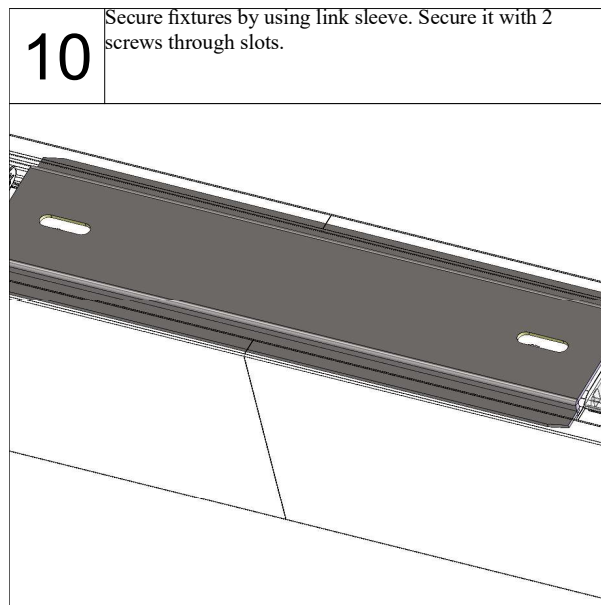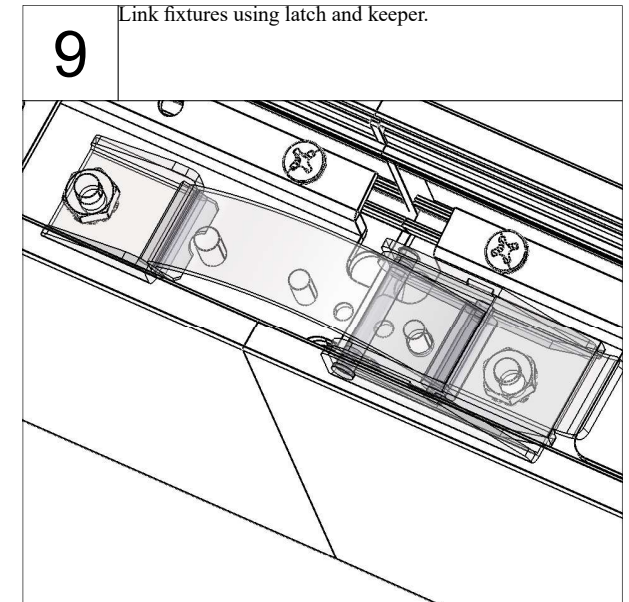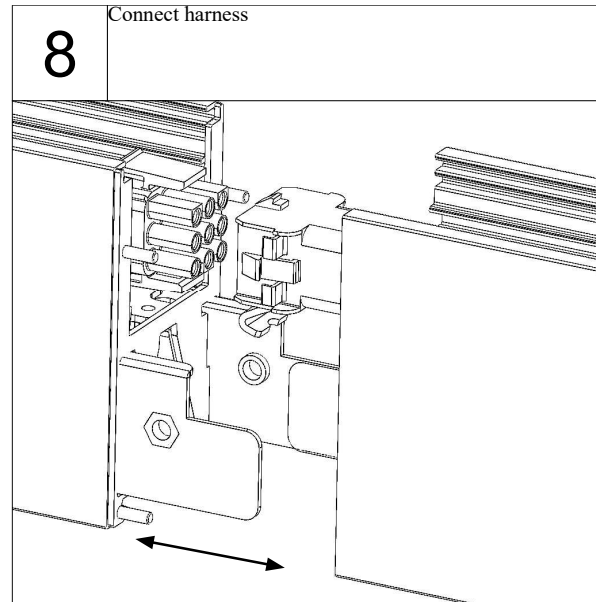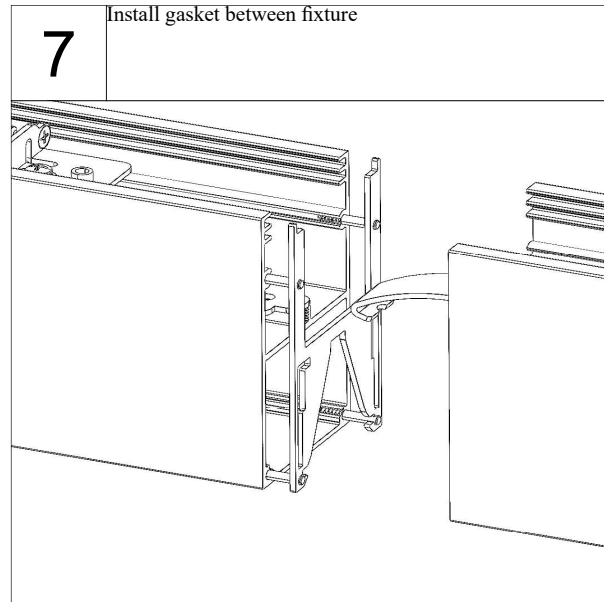


INSTALLATION INSTRUCTIONS

Continuous Stem With Canopy Cont. (STEMxxx)


13

Slide lens cutting guide over extra length of lens and secure with 2 screws. Don't over tighten screws as the slots are used for the end cap.

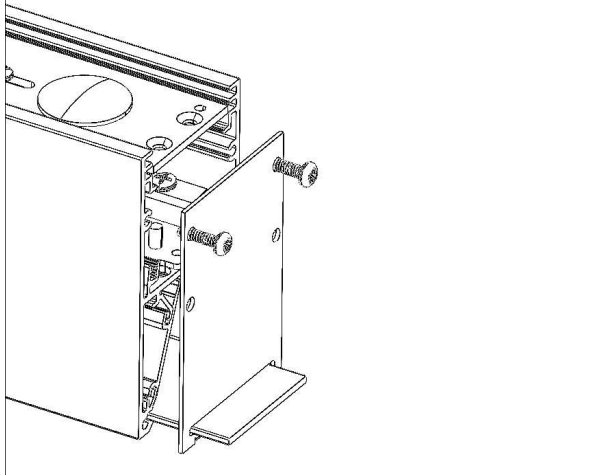


14

Scribe lens multiple times min of (10X). Apply pressure in upward direction to detach extra lens material. Remove lens cutting guide.

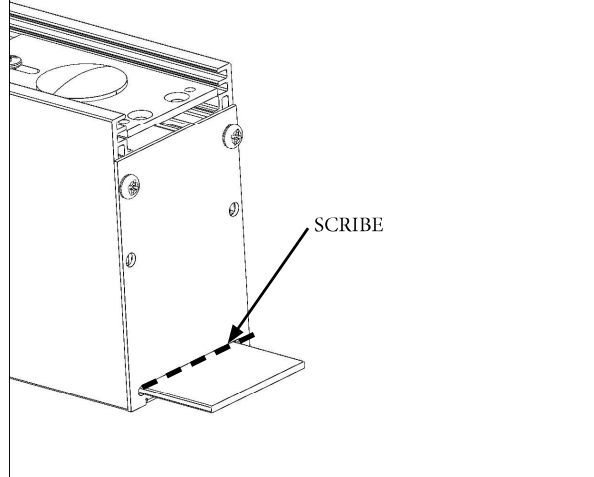


15

Insert end cap with gasket on the end fixture with 2 screws.

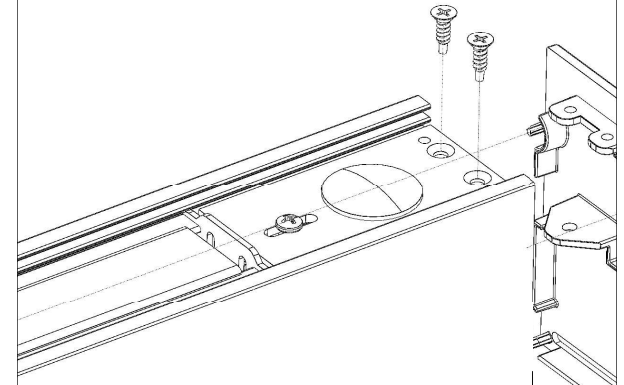

16

Restore power

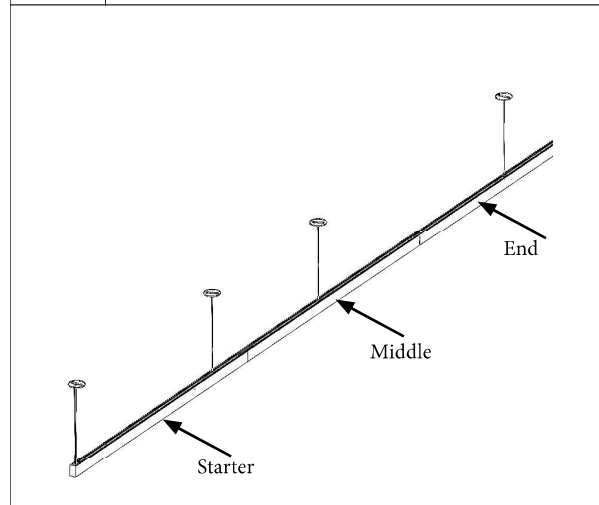


INSTALLATION INSTRUCTIONS


Joint Shape Configuration PM




_SQ
Square
Supply "A" dimension

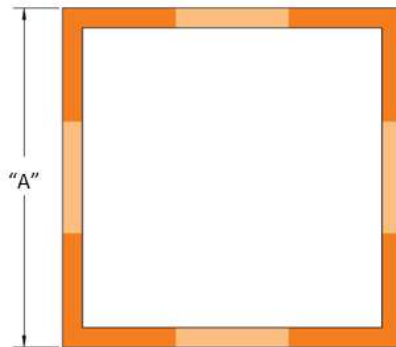

_x_RECT
Rectangle
Supply AxB dimensions

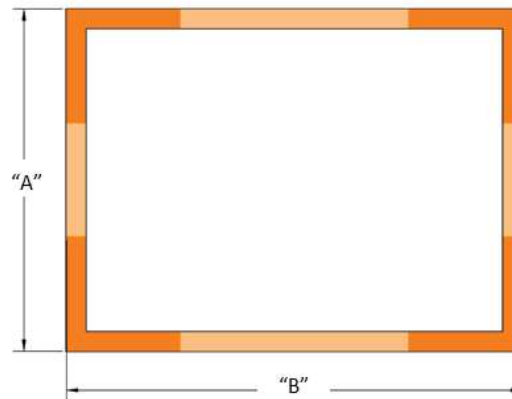


_x_L
L-Shape
Supply AxB dimensions

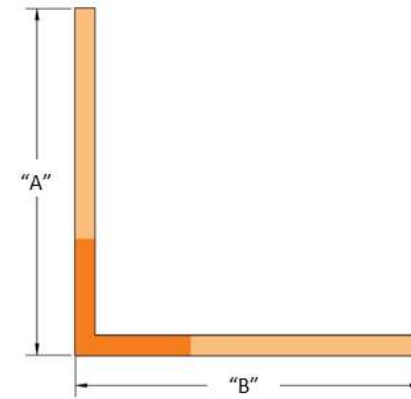

INSTALLATION INSTRUCTIONS







Shape Configuration PM Cont.(ACxxx) Sq or Rect

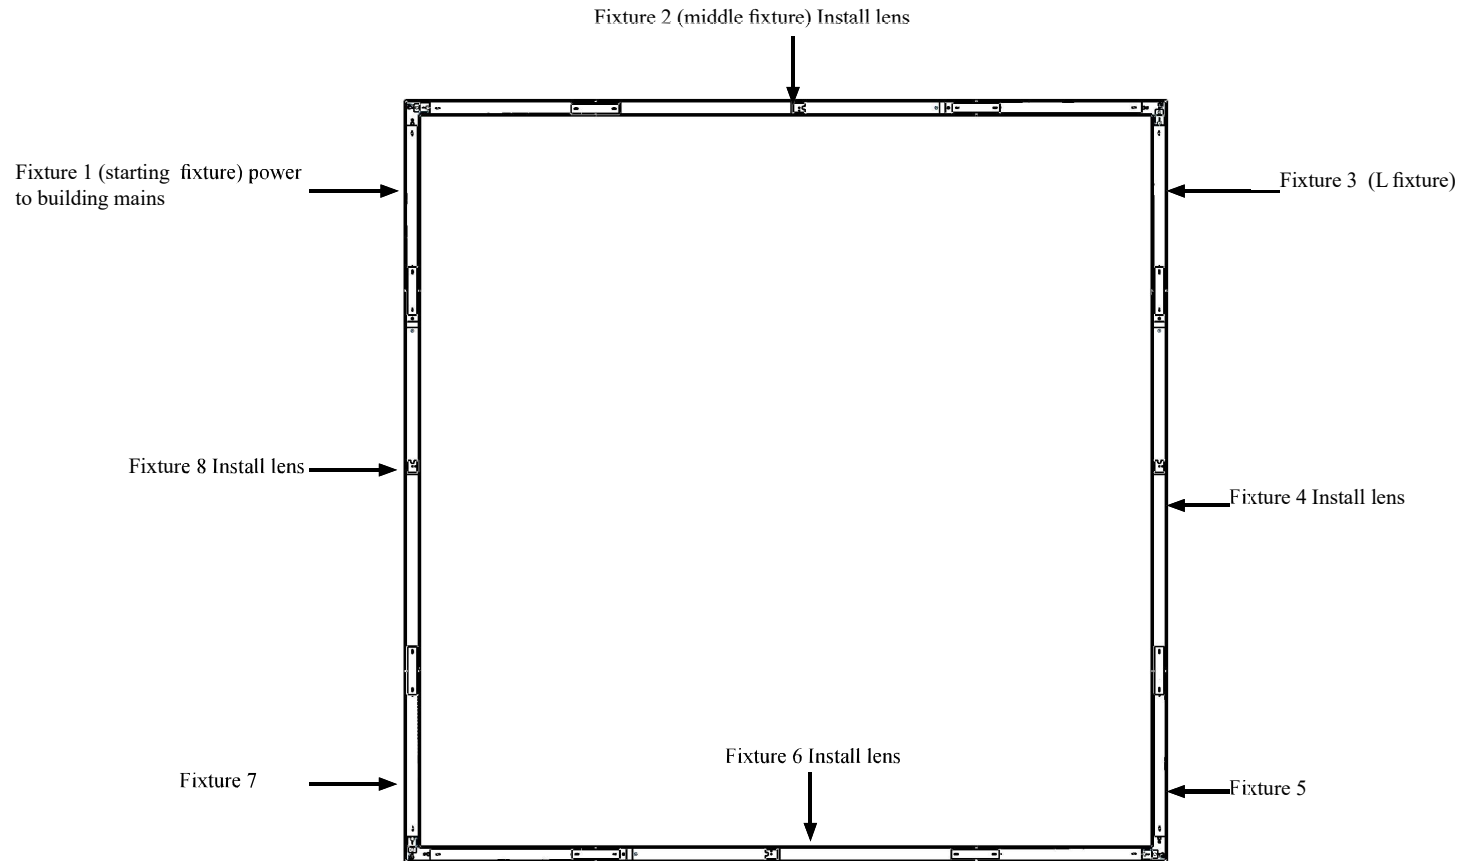

- Step 1. Hang fixture 1**
- Step 2. Hang fixture 2.** Connect fixtures 1&2. Slide in lens
- Step 3. Hang fixture 3.** Slide in lens to cap off that section and connect fixtures 3&2
- Step 4. Hang fixture 4.** Connect fixtures 4&3. Slide in lens
- Step 5. Hang fixture 5.** Slide in lens to cap off that section and connect fixtures 5&4
- Step 6. Hang fixture 6.** Connect fixtures 6&5. Slide in lens
- Step 7. Hang fixture 7.** Slide in lens to cap off that section and connect fixtures 7&6
- Step 8. Hang fixture 8.** Connect fixtures 8,7 slide in lens and connect fixtures 8&1







INSTALLATION INSTRUCTIONS

Shape Configuration PM Cont.(ACxxx) Sq or Rect

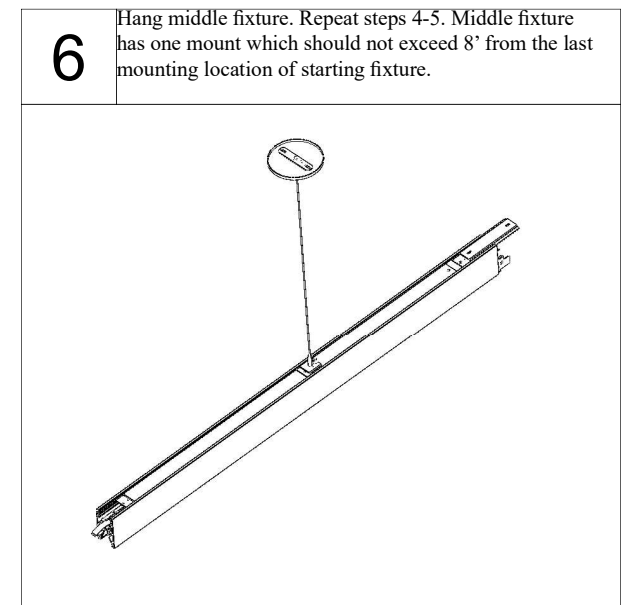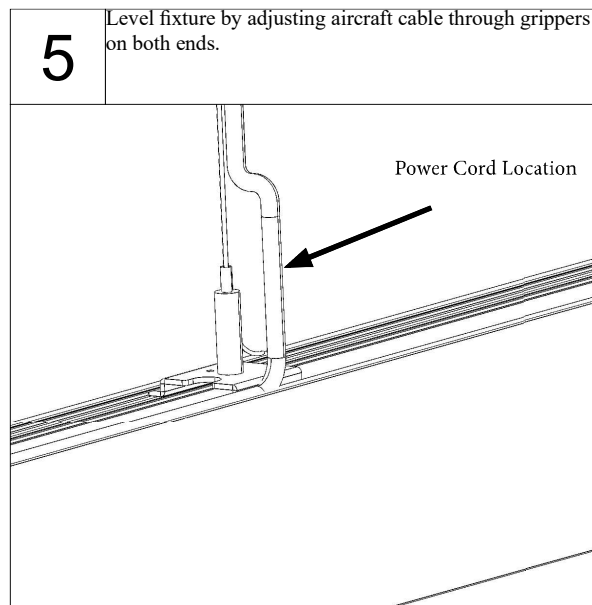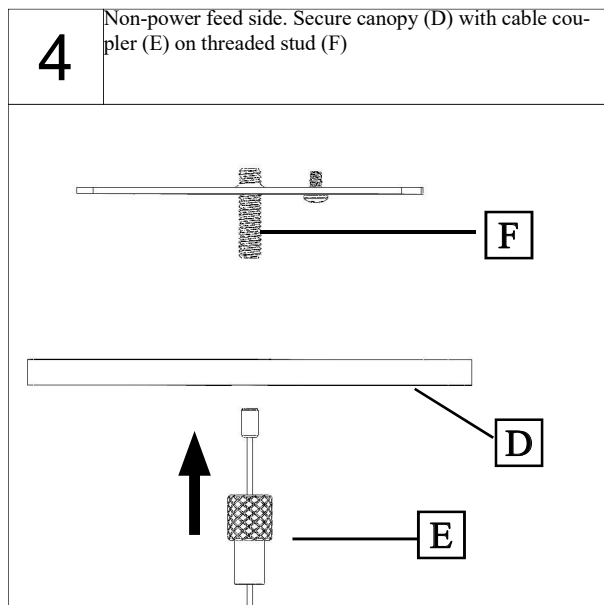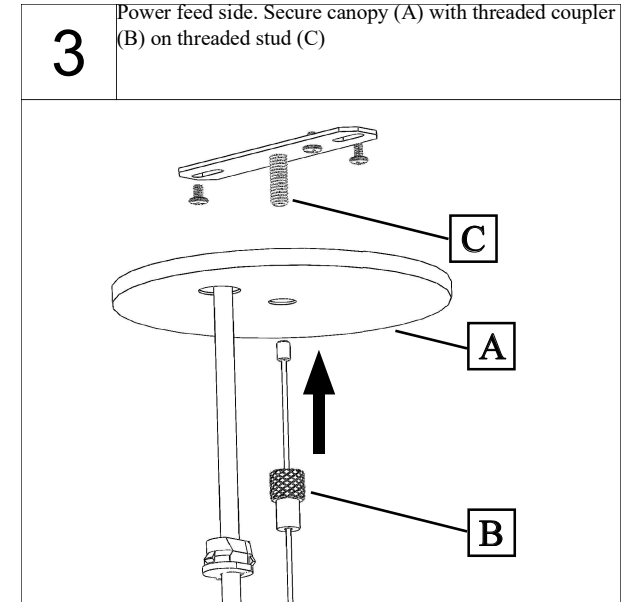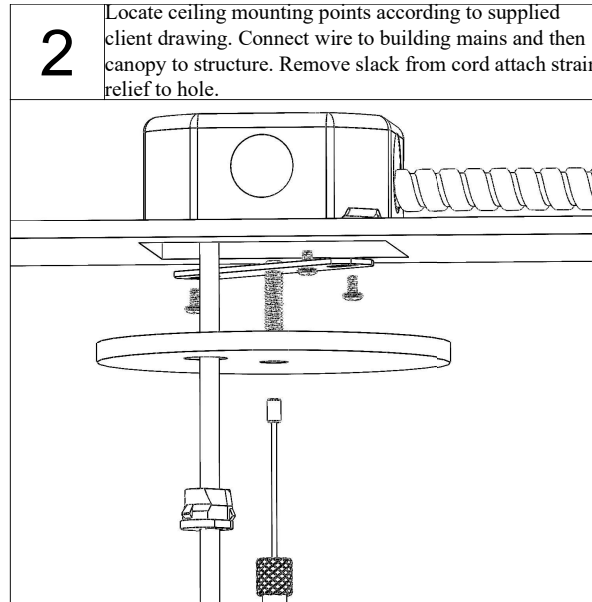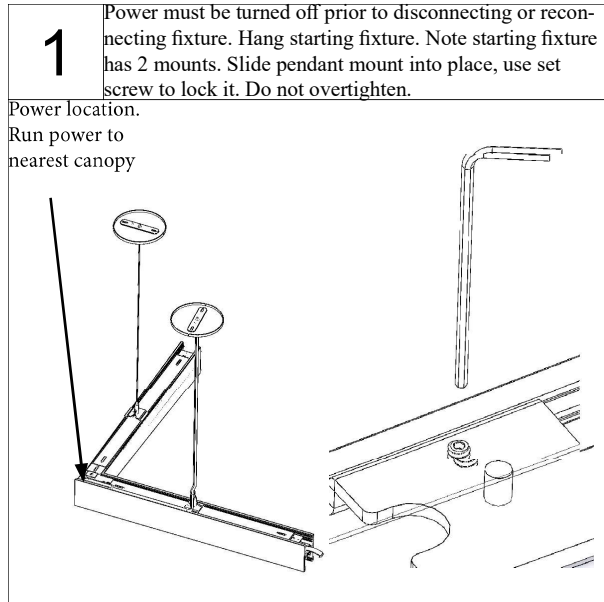







INSTALLATION INSTRUCTIONS

Shape Configuration PM Cont.(ACxxx) Sq or Rect

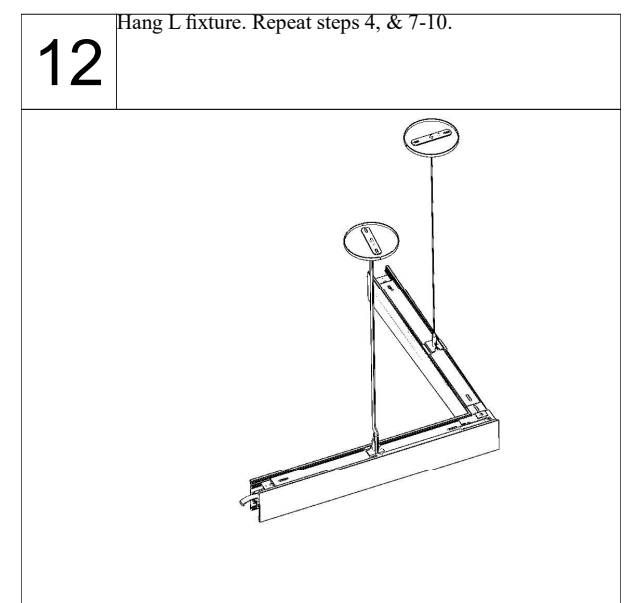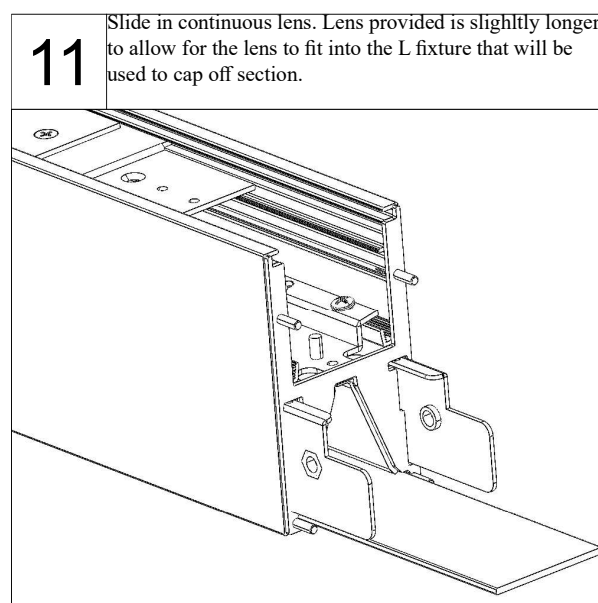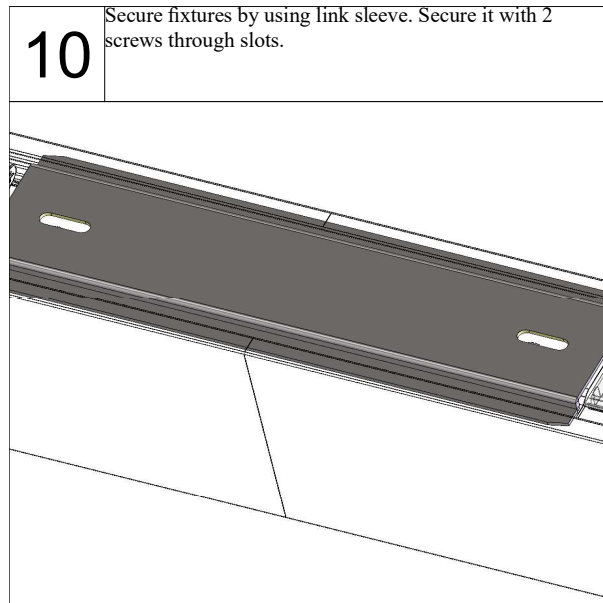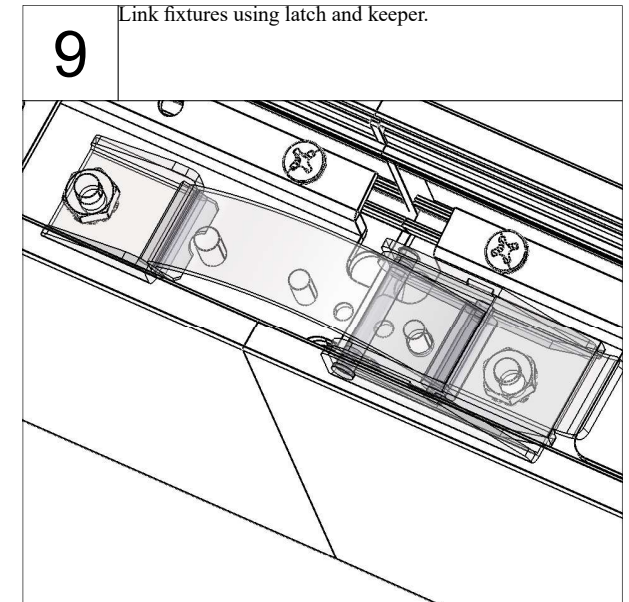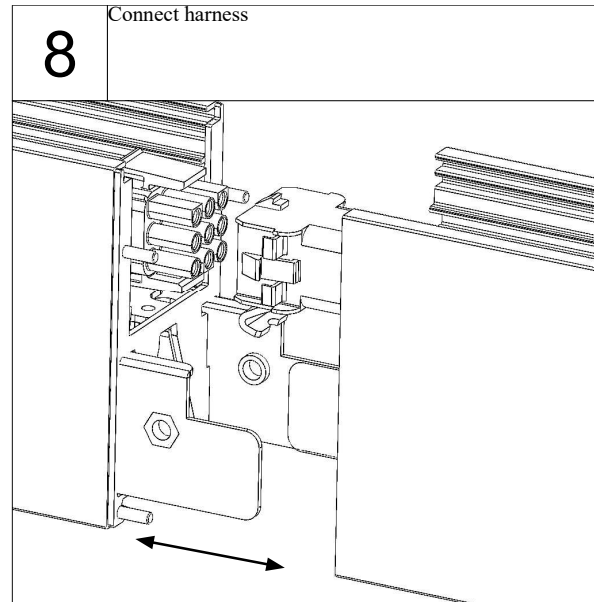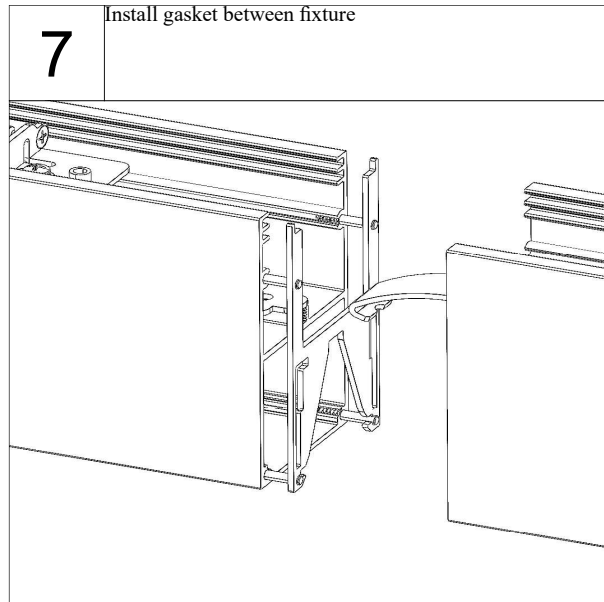







INSTALLATION INSTRUCTIONS

Shape Configuration PM Cont.(ACxxx) Sq or Rect

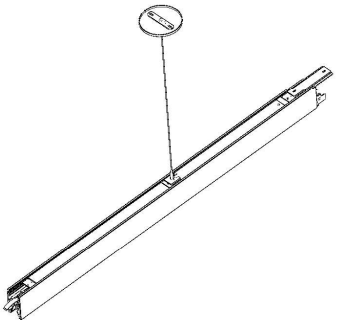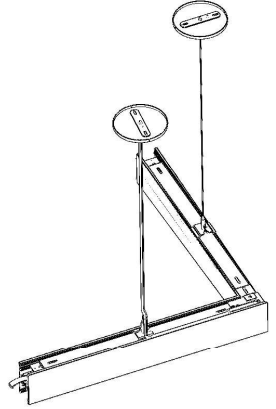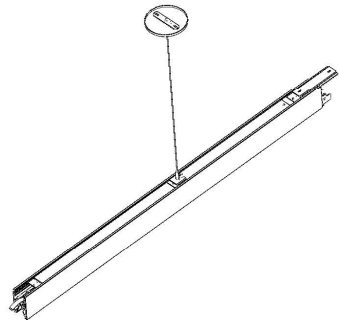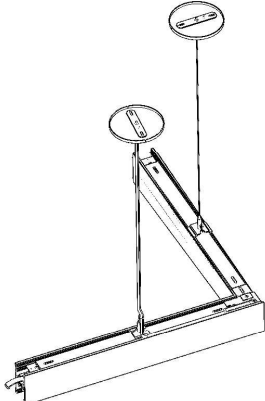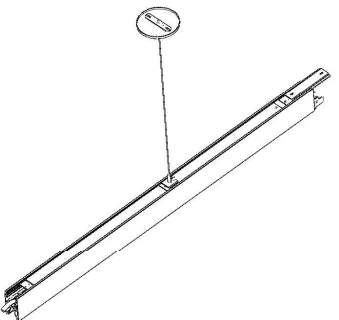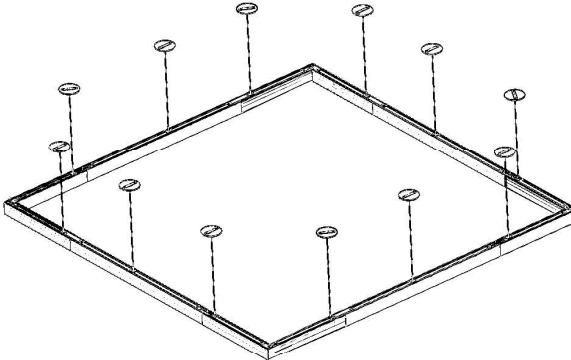13	Hang middle fixture. Middle fixture has one mount which should not exceed 8' from the last mounting location. Repeat steps 4 & 7-10.	14	Hang L fixture. Repeat steps 4, & 7-10.	15	Hang middle fixture. Middle fixture has one mount which should not exceed 8' from the last mounting location. Repeat steps 4 & 7-10.
					
16	Hang L fixture. Repeat steps 4, & 7-10.	17	Hang middle fixture. Middle fixture has one mount which should not exceed 8' from the last mounting location. Repeat steps 4 & 7-10.	18	Restore Power
					







INSTALLATION INSTRUCTIONS

Shape Configuration PM (ACxxx) L

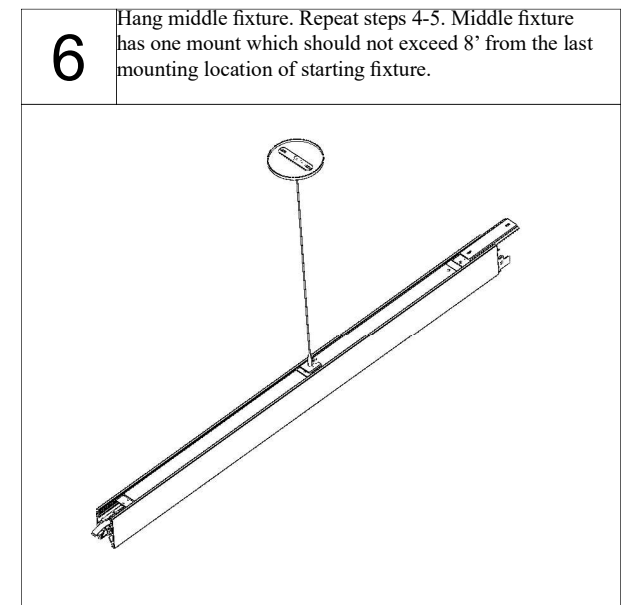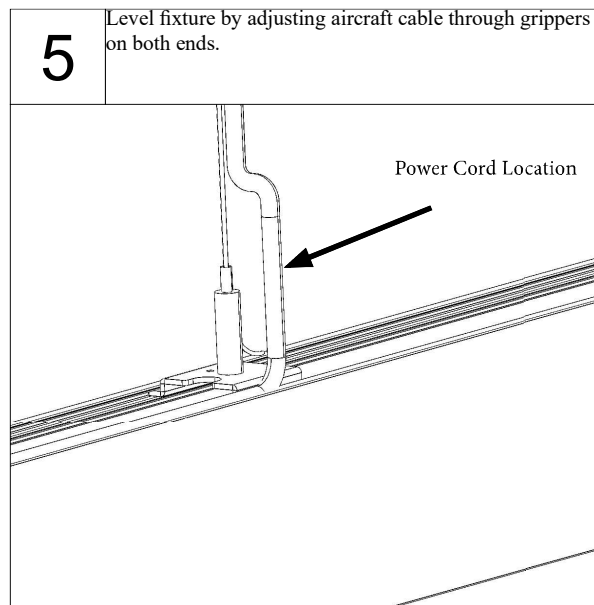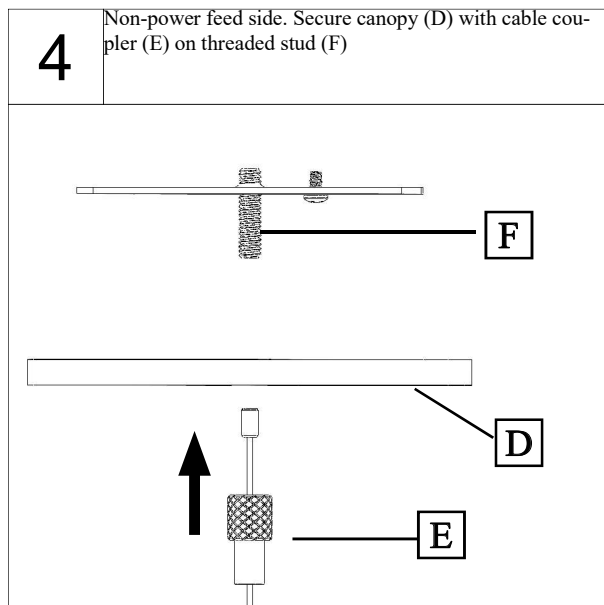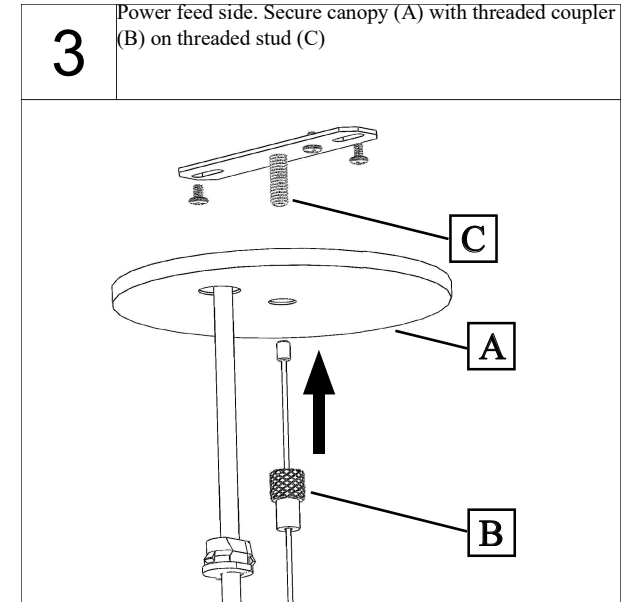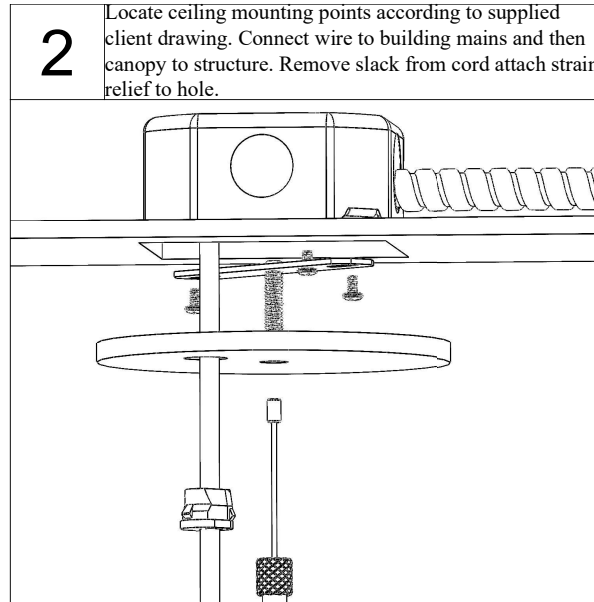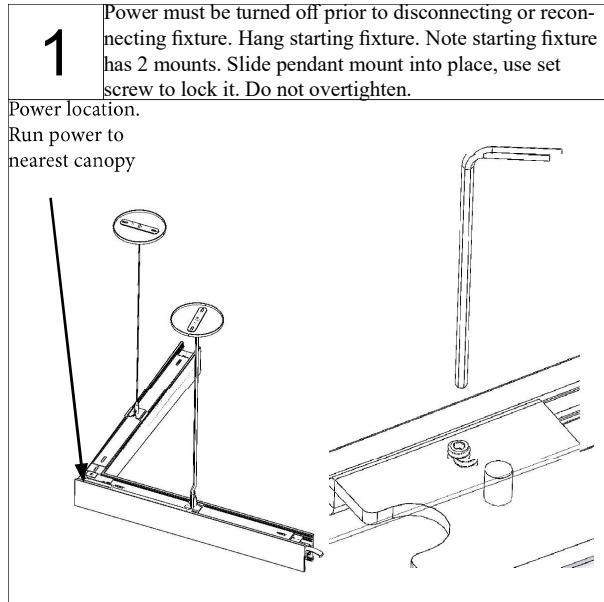

INSTALLATION INSTRUCTIONS

Shape Configuration PM Cont. (ACxxx) L

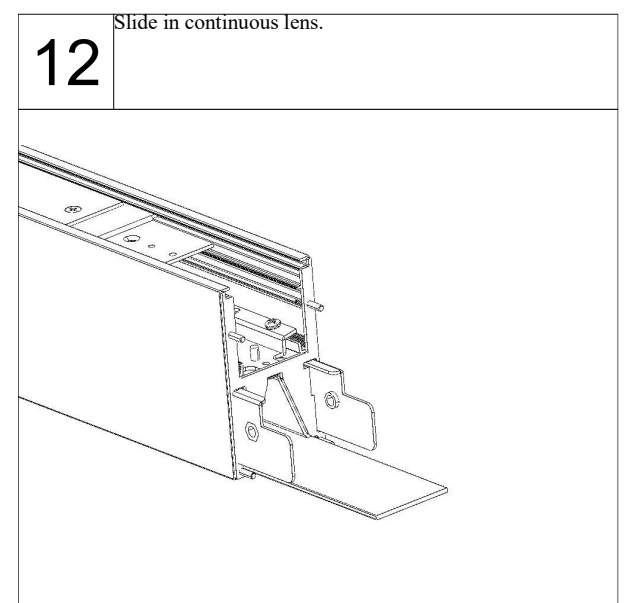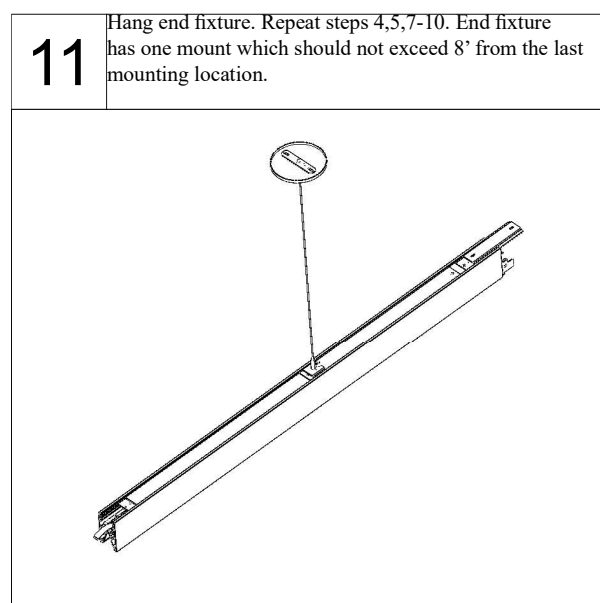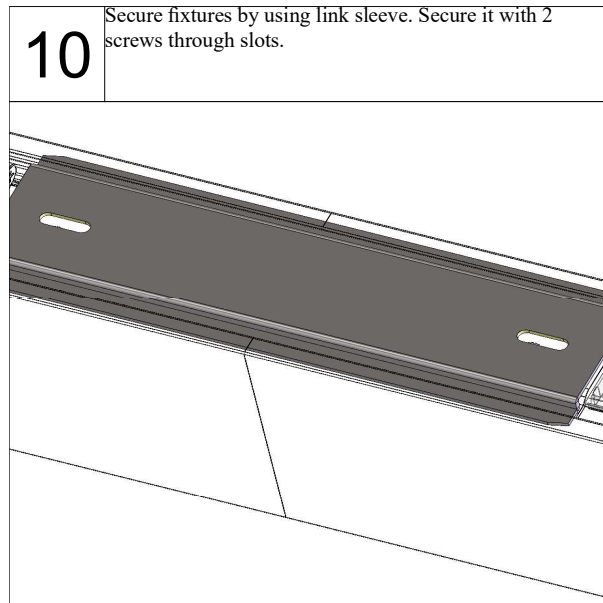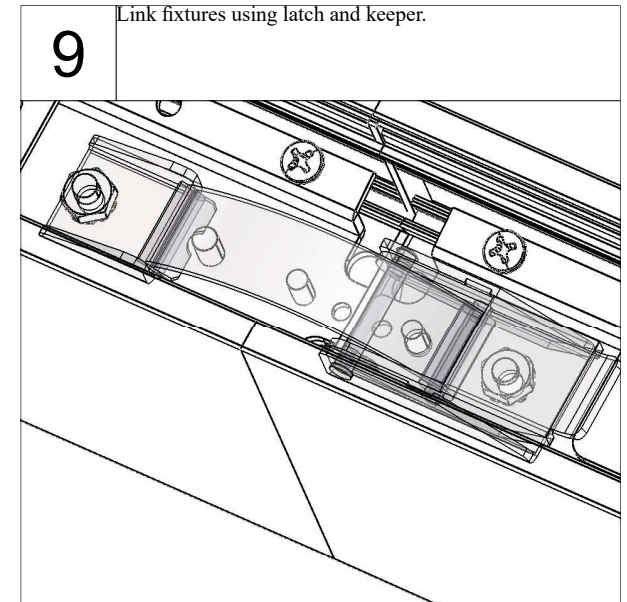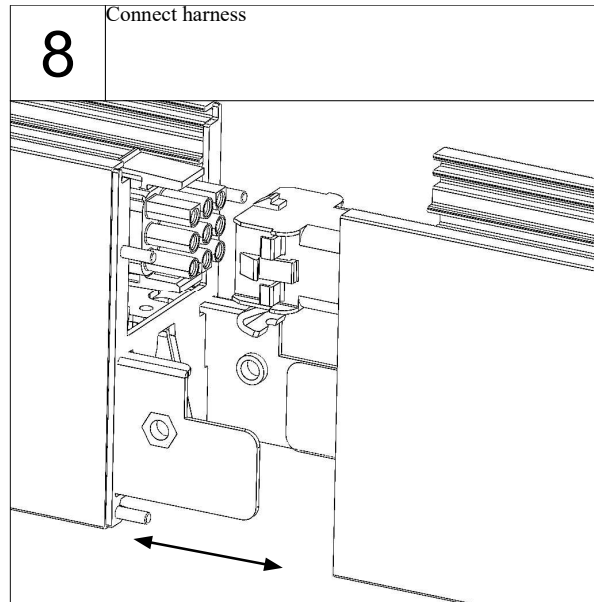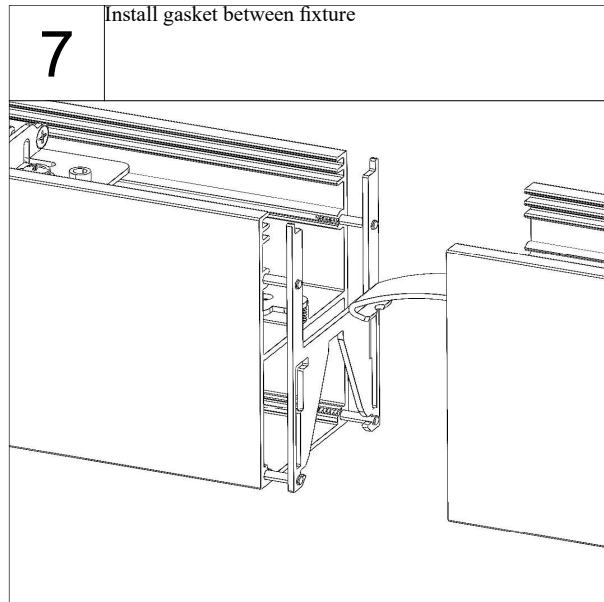


INSTALLATION INSTRUCTIONS

Shape Configuration PM Cont. (ACxxx) L




13

Insert end cap with gasket on the end fixture with 2 screws.

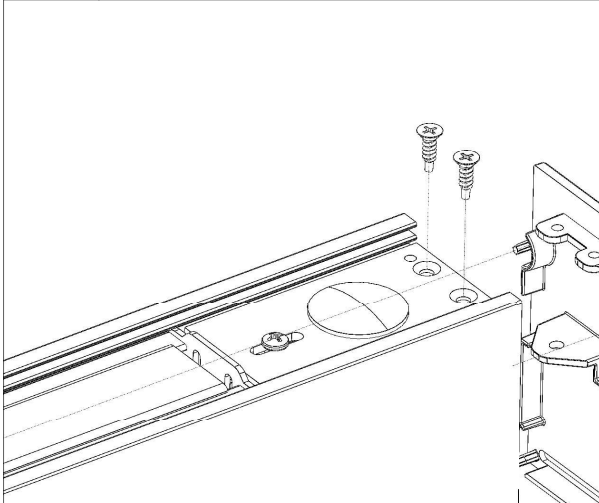


14

Hang end fixture. Repeat steps 4,5,7-13 End fixture has one mount which should not exceed 8' from the last mounting location.

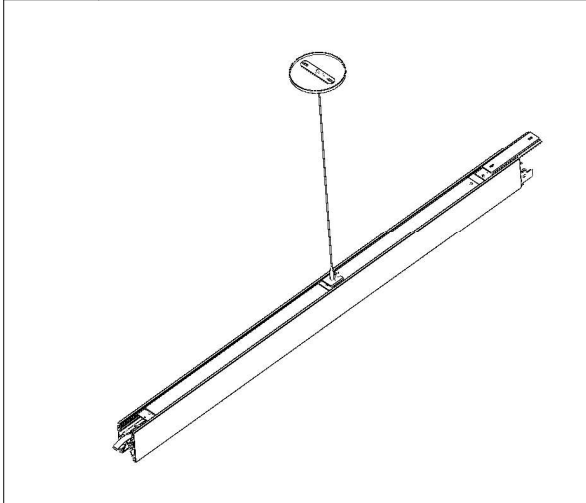

15


Restore power

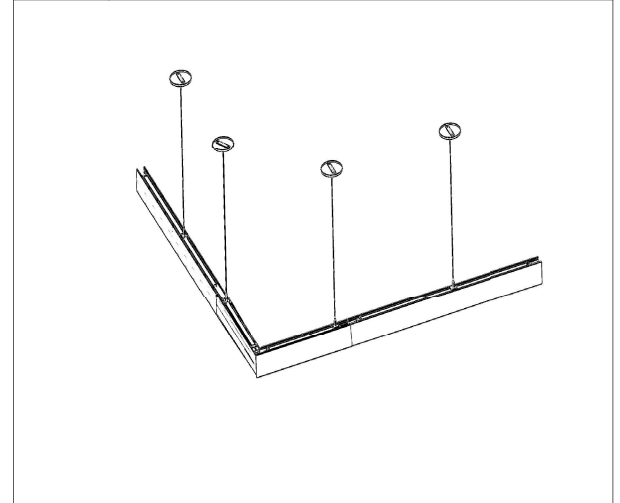

INSTALLATION INSTRUCTIONS


Shape Configuration Wall Mount (WM) L

1 Power must be turned off prior to disconnecting or re-connecting fixture. Hang starting fixture. Note all fixtures have 2 mounts.

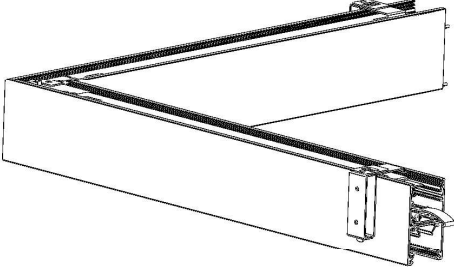


Wire Colors (standard)
 Black Hot
 White Neutral
 Green Ground
 Purple + Dim (0-10v)
 Gray - Dim (0-10v)


2 Remove top screw to release wall mount bracket.

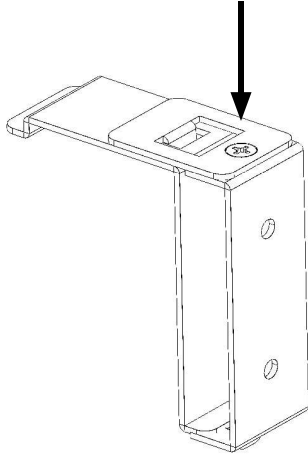


3 Locate mounting points according to supplied client drawing. Install brackets to wall.

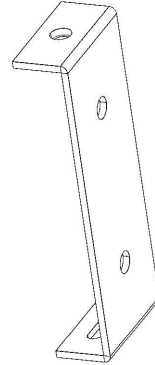

4 Connect fixture wiring to line power.

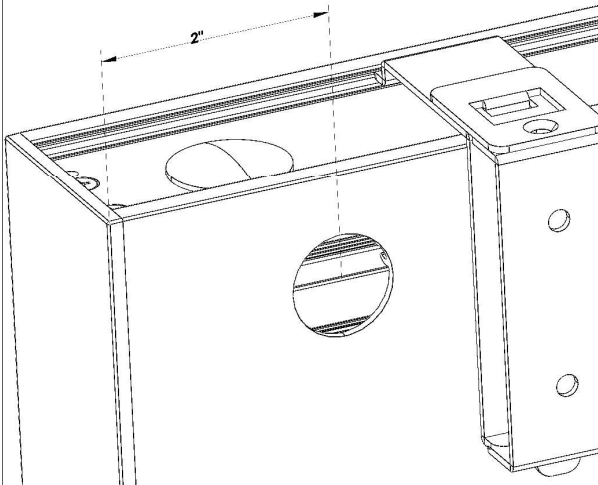


5

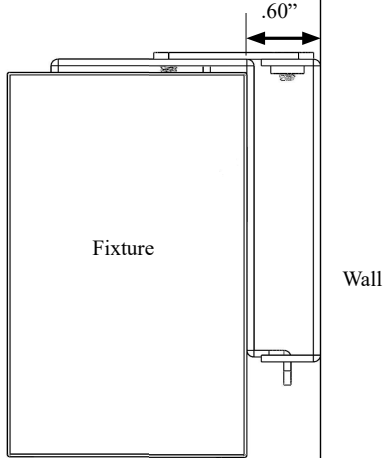

Fixture







Wall

6 Hang end fixture. Repeat steps 2 & 3.

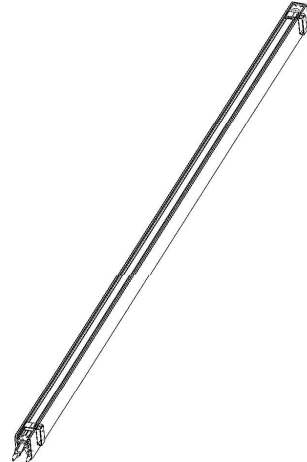

INSTALLATION INSTRUCTIONS

Shape Configuration Wall Mount Cont. (WM) L

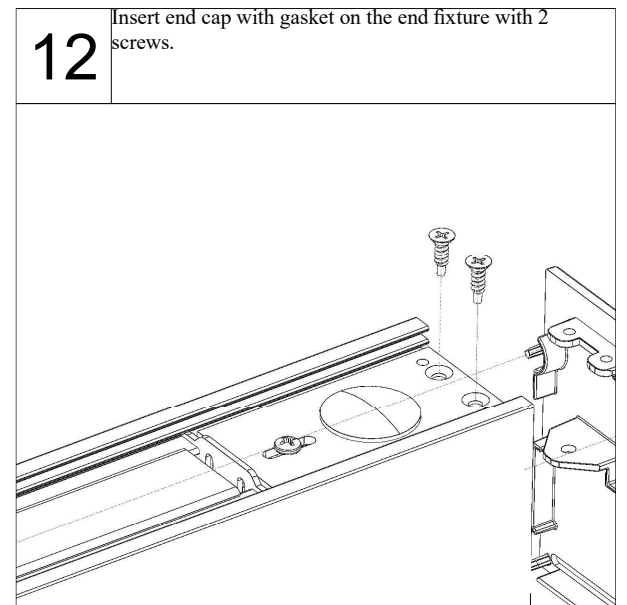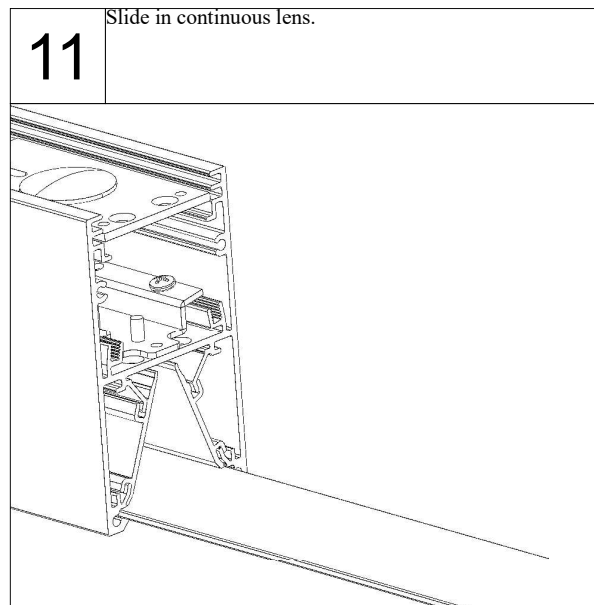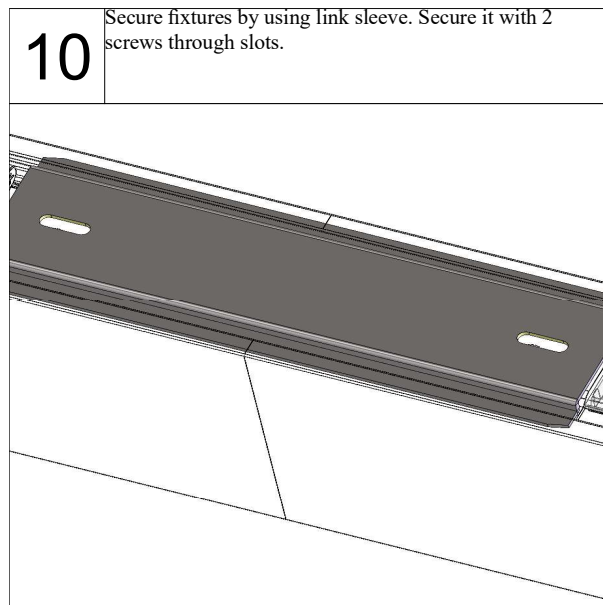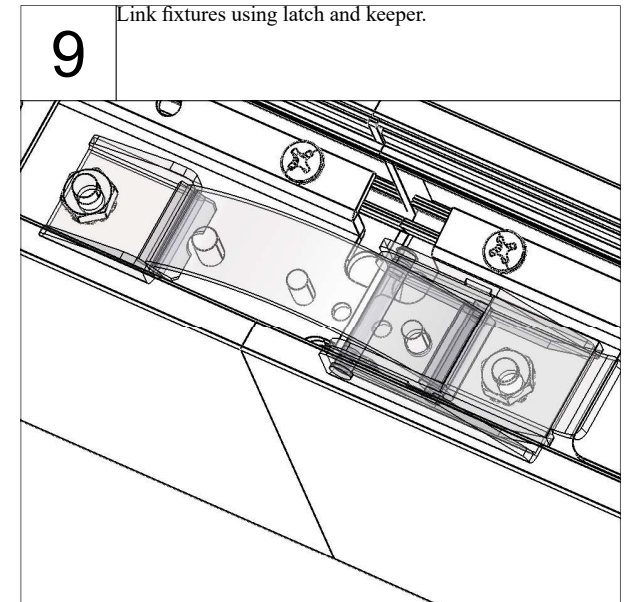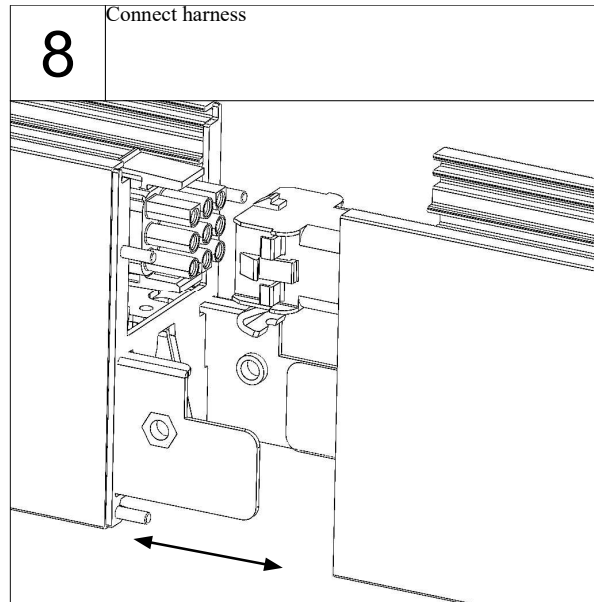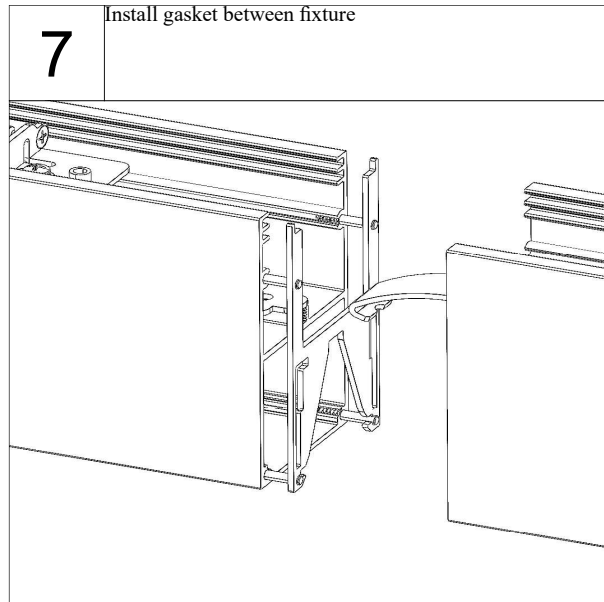

INSTALLATION INSTRUCTIONS

Shape Configuration Wall Mount Cont. (WM) L




13

Hang end fixture. Repeat steps 2, 3, & 7-12.



14

Restore power

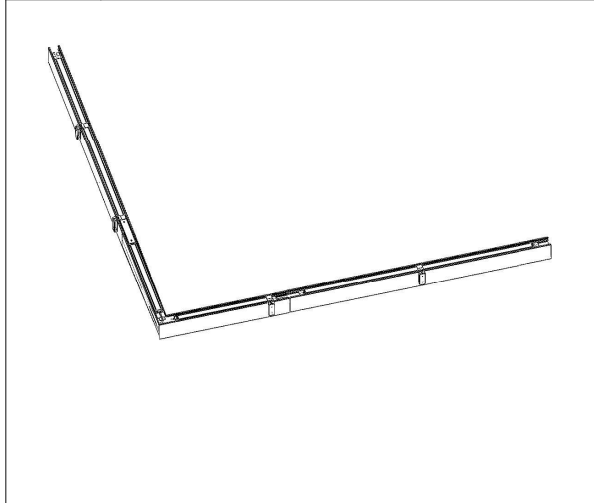


INSTALLATION INSTRUCTIONS


Joint Shape Configuration Architectural Wall Mount (AWM) L




- 1** Power must be turned off prior to disconnecting or reconnecting fixture. Locate mounting points according to supplied client drawing.

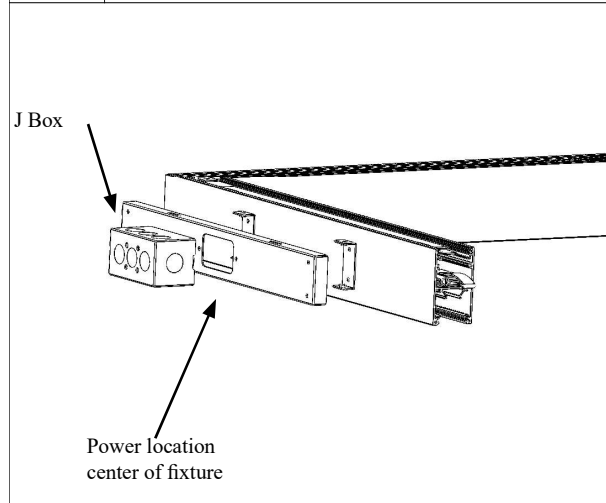


- 2** Remove wall mount bracket from fixture. Secure bracket to structure in desired locations.

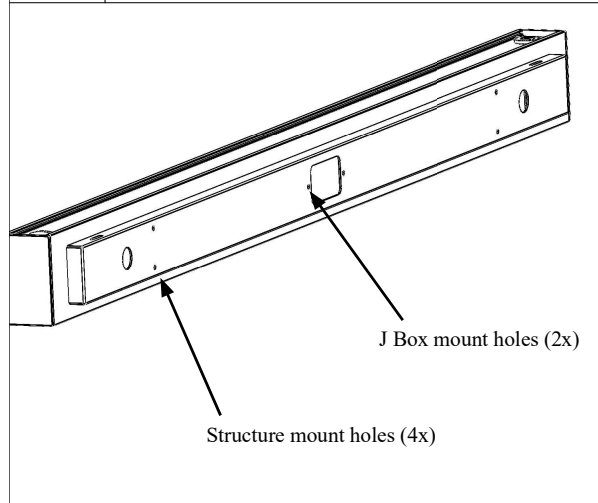


- 3** Connect fixture wiring to line power.

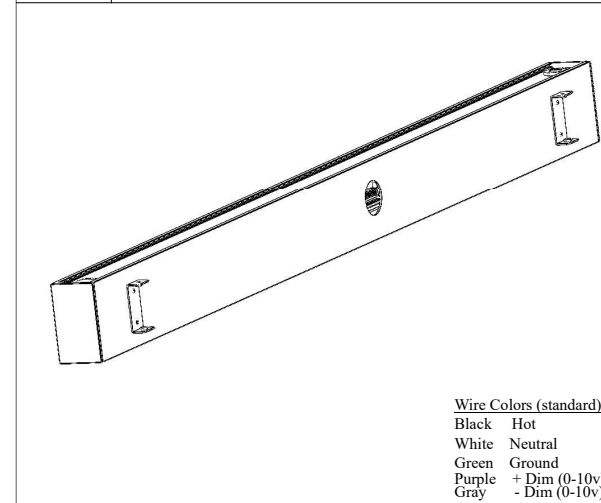


- 4** Use slots to center and secure fixture.

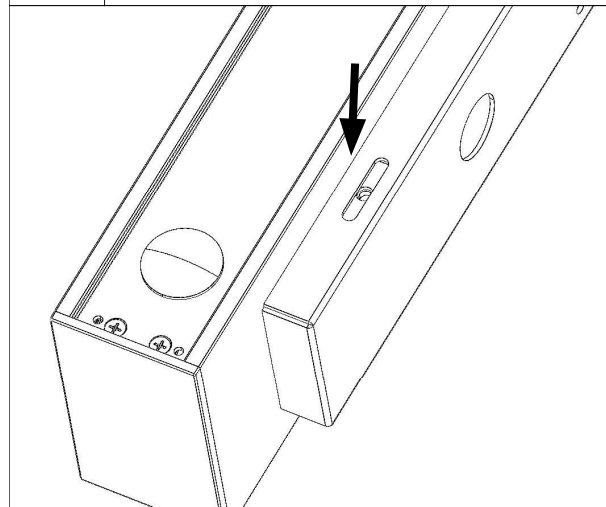

- 5** Hang middle fixture. Locate mounting points according to supplied client drawing. Repeat steps 2&4.






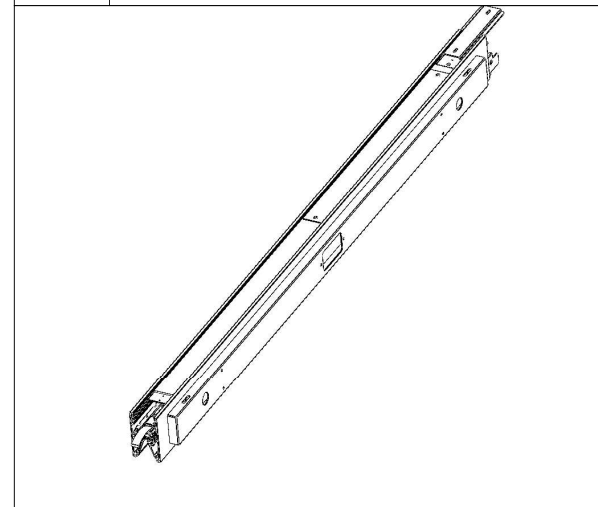


- 6** Install gasket between fixture

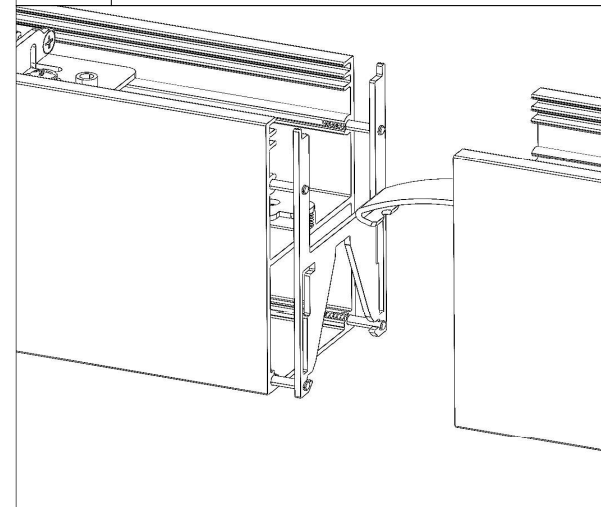

INSTALLATION INSTRUCTIONS

Joint Shape Configuration Architectural Wall Mount Cont.(AWM) L

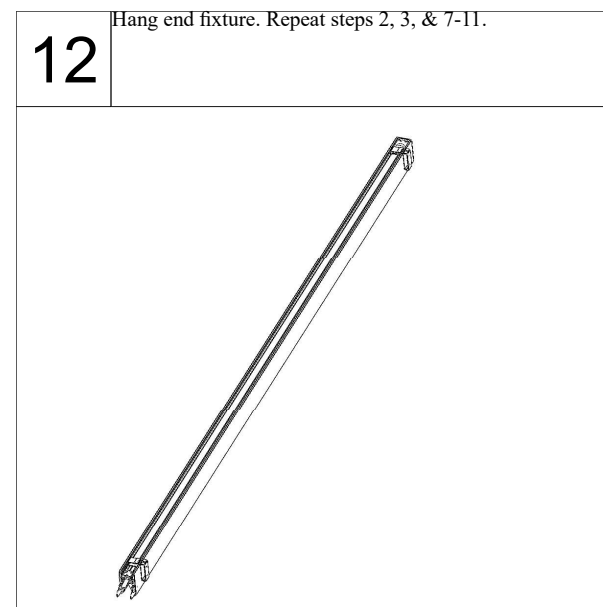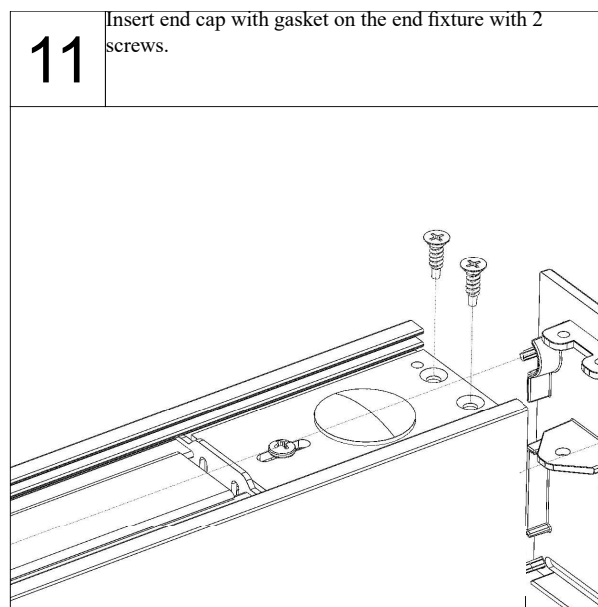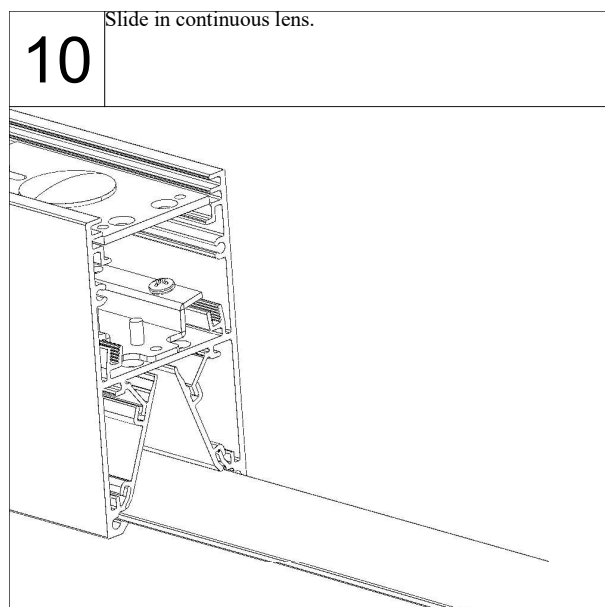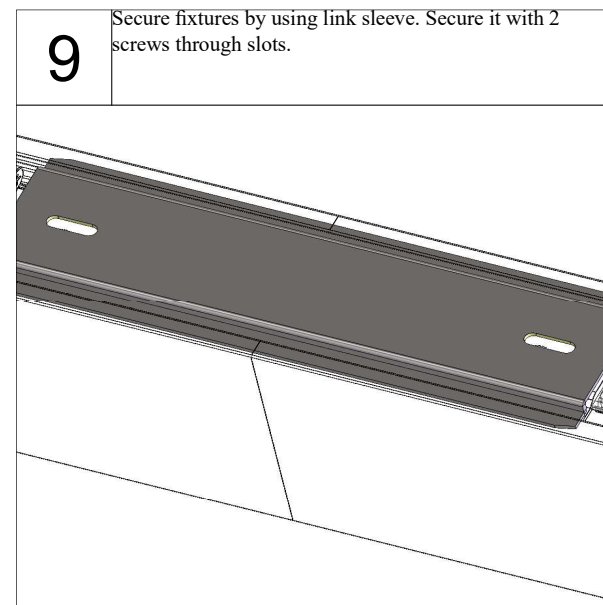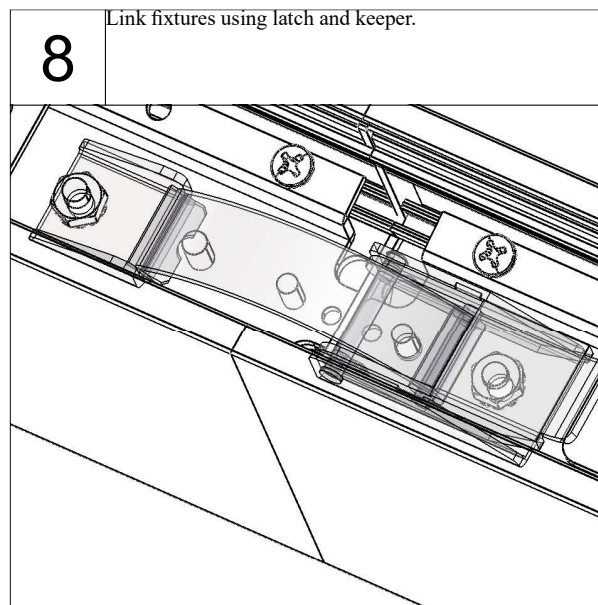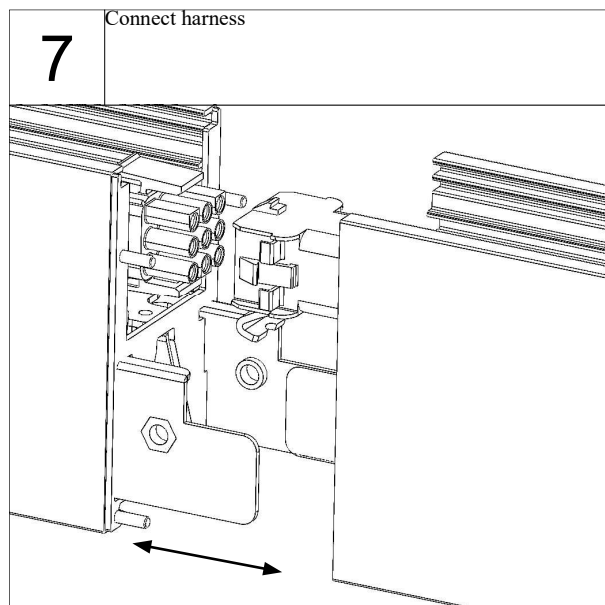


INSTALLATION INSTRUCTIONS

Shape Configuration Wall Mount Cont. (WM) L




13

Restore power

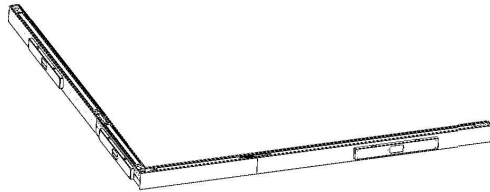

INSTALLATION INSTRUCTIONS

Shape Continuous Stem With Canopy (STEMxxx) Sq or Rect

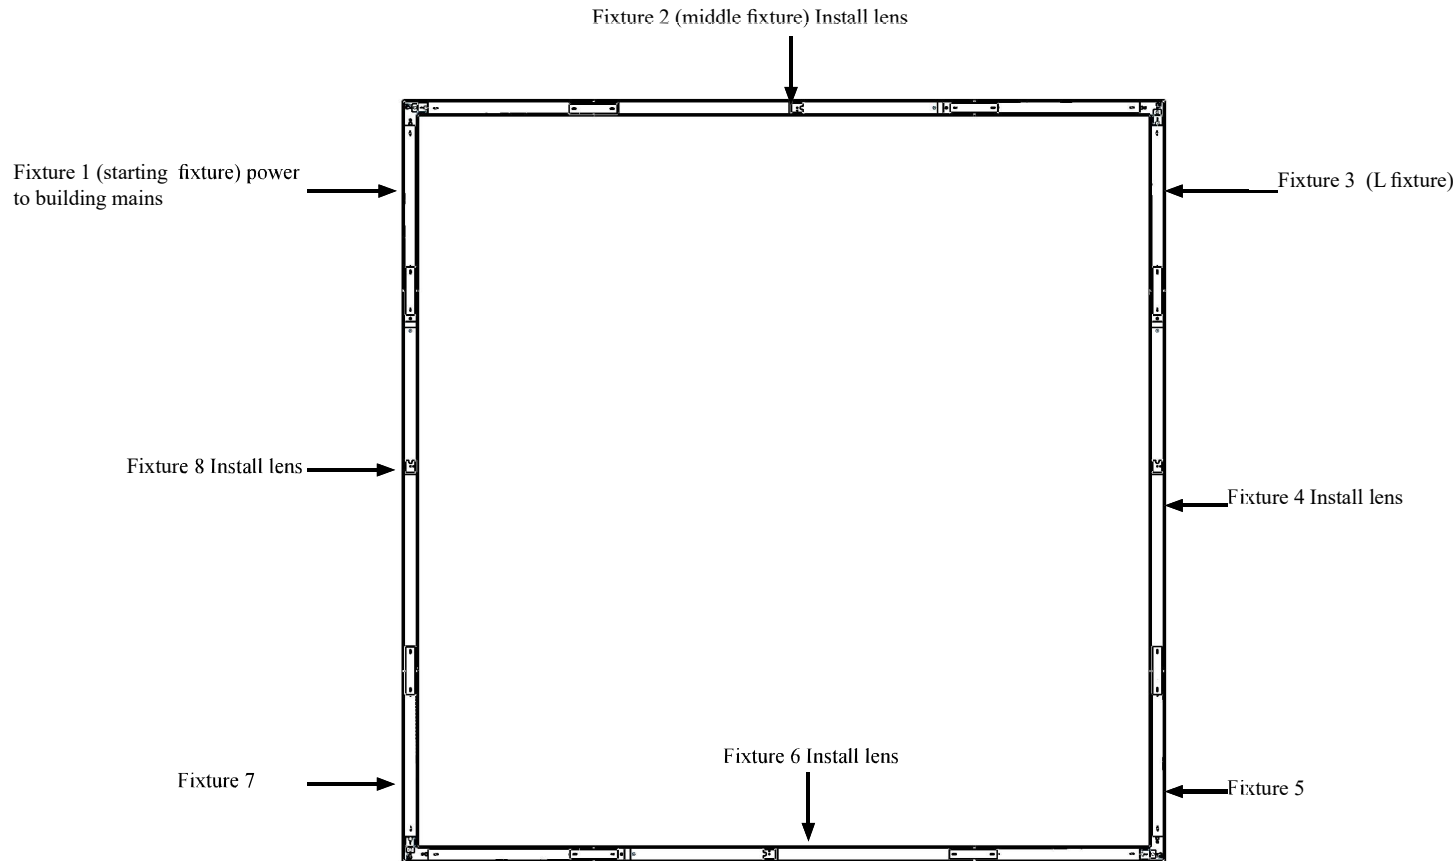

Step 1. Hang fixture 1

Step 2. Hang fixture 2. Connect fixtures 1&2. Slide in lens

Step 3. Hang fixture 3. Slide in lens to cap off that section and connect fixtures 3&2

Step 4. Hang fixture 4. Connect fixtures 4&3. Slide in lens

Step 5. Hang fixture 5. Slide in lens to cap off that section and connect fixtures 5&4







Step 6. Hang fixture 6. Connect fixtures 6&5. Slide in lens

Step 7. Hang fixture 7. Slide in lens to cap off that section and connect fixtures 7&6

Step 8. Hang fixture 8. Connect fixtures 8,7 slide in lens and connect fixtures 8&1







INSTALLATION INSTRUCTIONS

Shape Continuous Stem With Canopy (STEMxxx) Sq or Rect

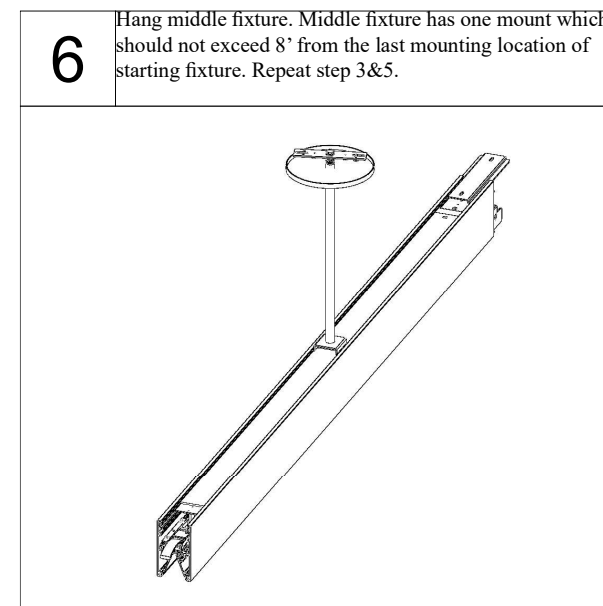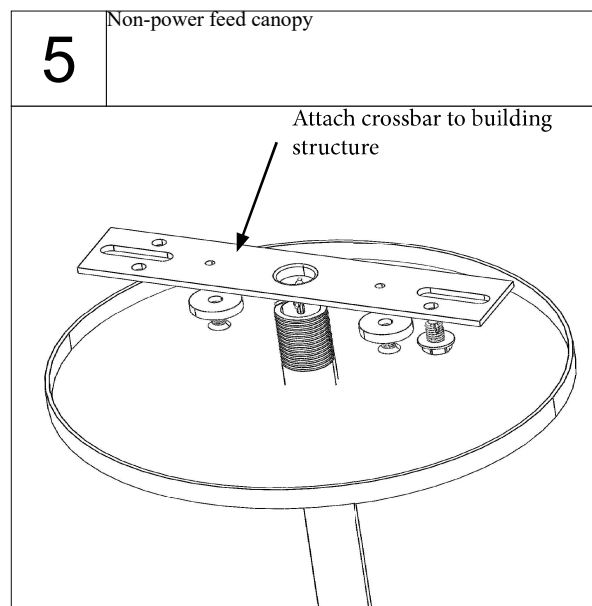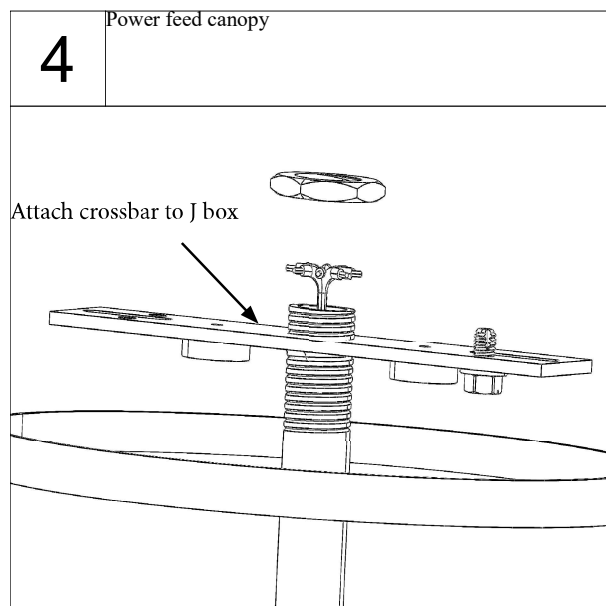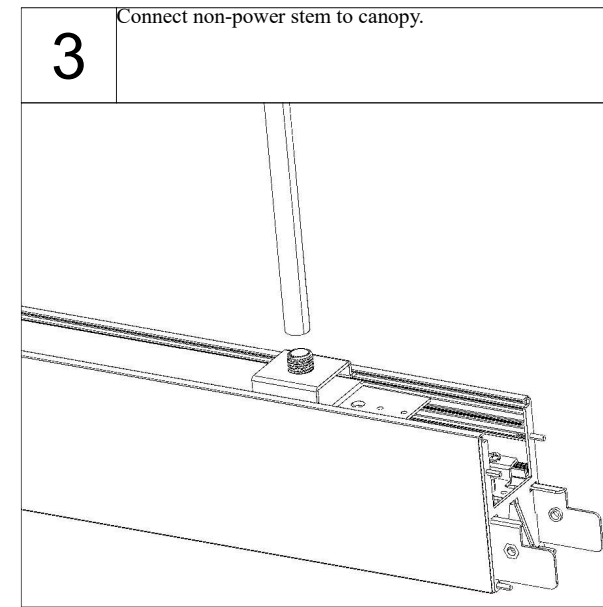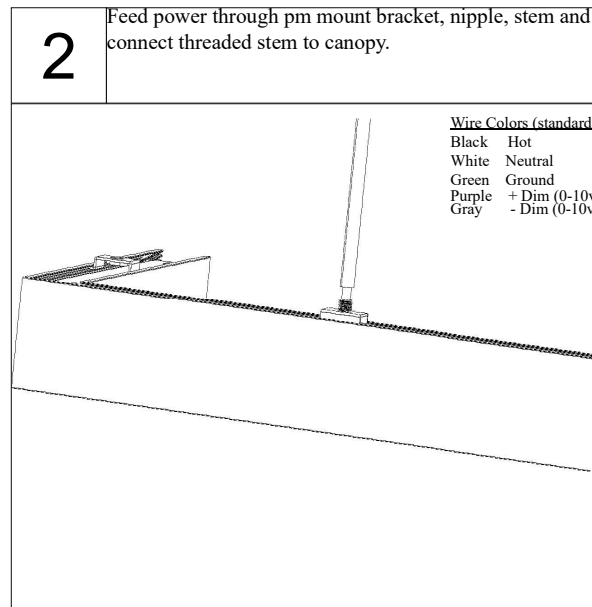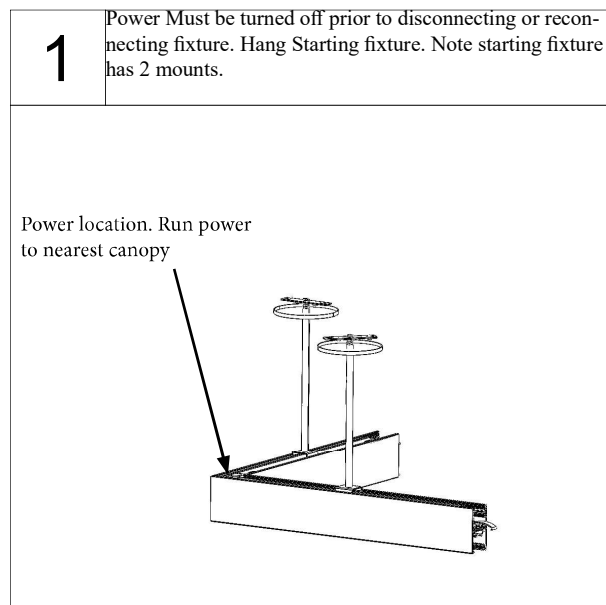

INSTALLATION INSTRUCTIONS

Shape Continuous Stem With Canopy (STEMxxx) Sq or Rect

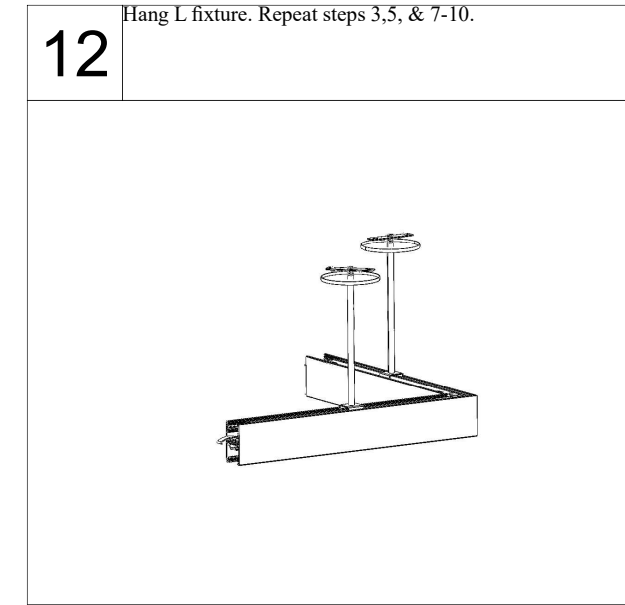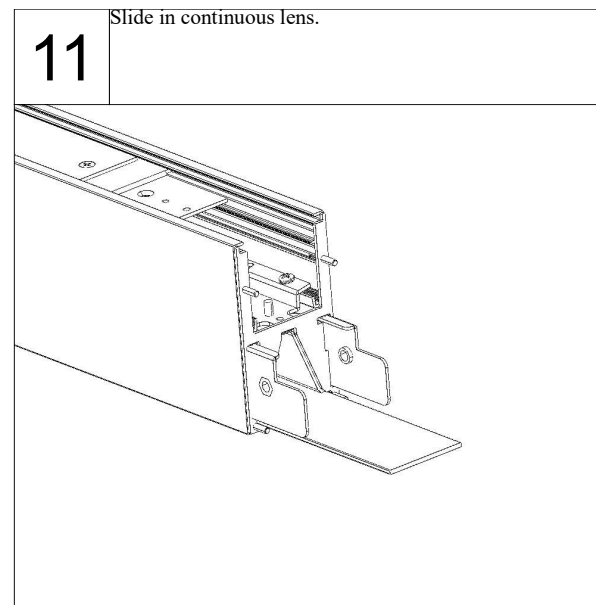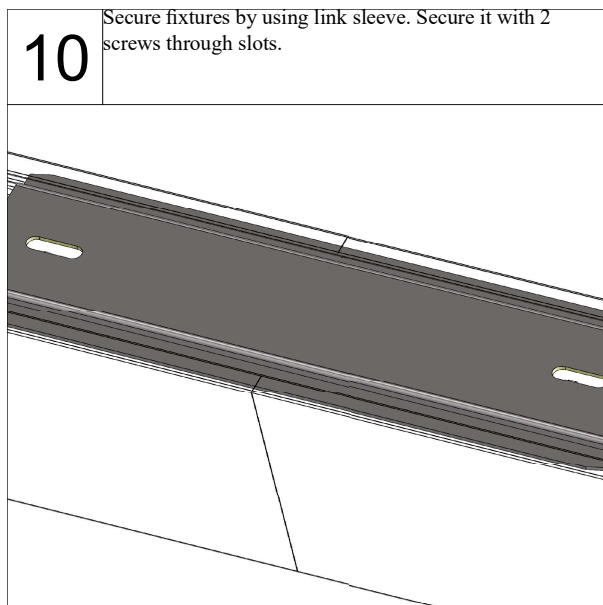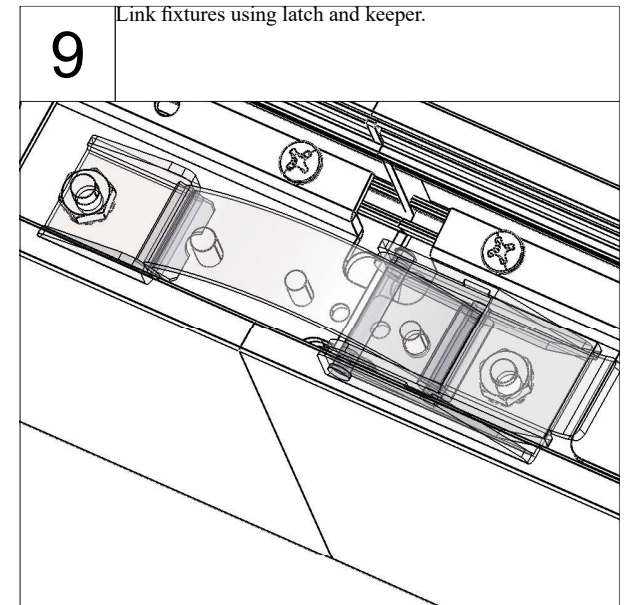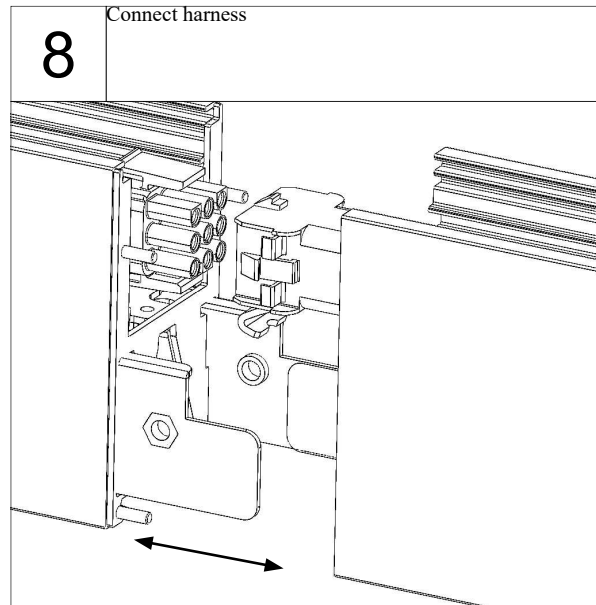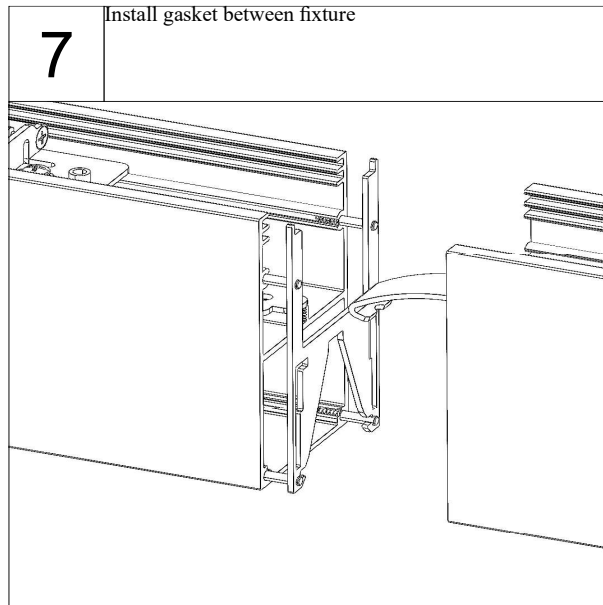


INSTALLATION INSTRUCTIONS

Shape Continuous Stem With Canopy (STEMxxx) Sq or Rect


13

Hang middle fixture. Middle fixture has one mount which should not exceed 8' from the last mounting location of starting fixture. Repeat step 4-5, & 7-11.

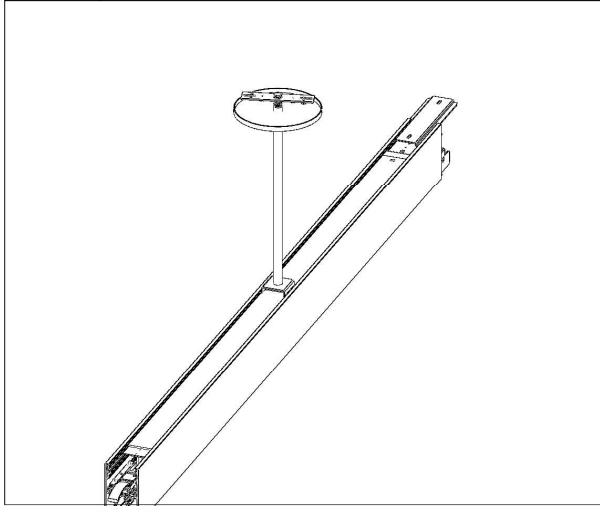


14

Hang L fixture. Repeat steps 3,5, & 7-10.

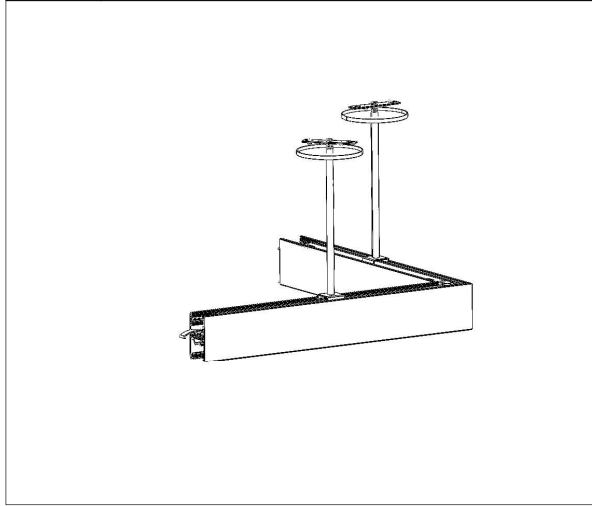


15

Hang middle fixture. Middle fixture has one mount which should not exceed 8' from the last mounting location of starting fixture. Repeat step 4-5, & 7-11.

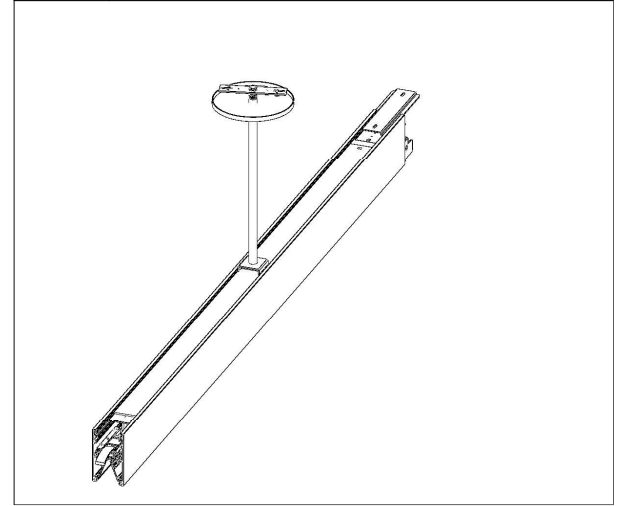


16

Hang L fixture. Repeat steps 3,5, & 7-10.

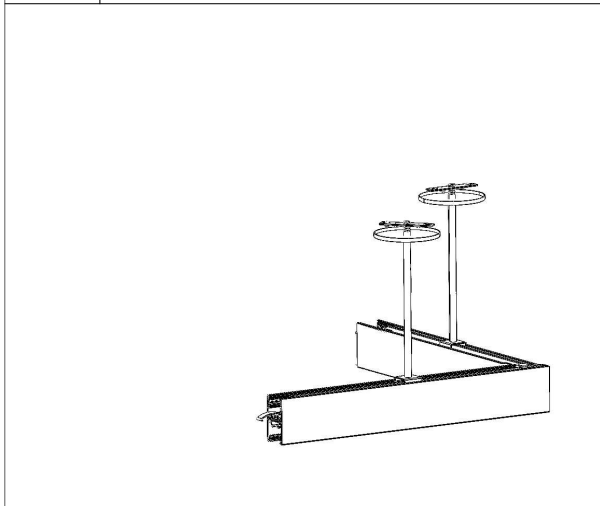


17

Hang middle fixture. Middle fixture has one mount which should not exceed 8' from the last mounting location of starting fixture. Repeat step 3,5, & 7-11.

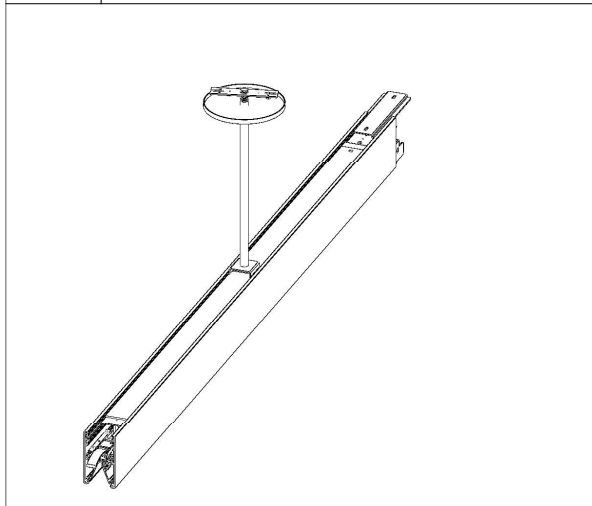







18

Restore Power

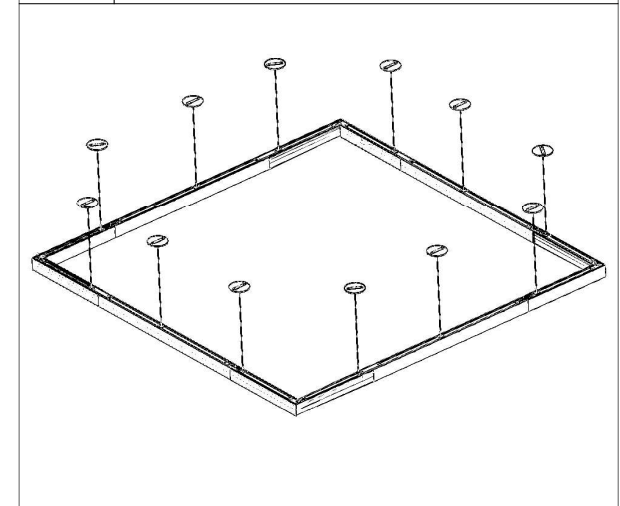







INSTALLATION INSTRUCTIONS

Shape Continuous Stem With Canopy (STEMxxx) L

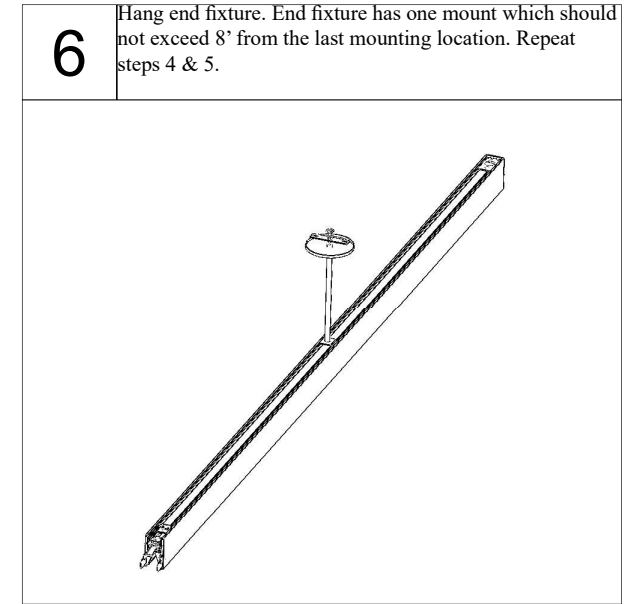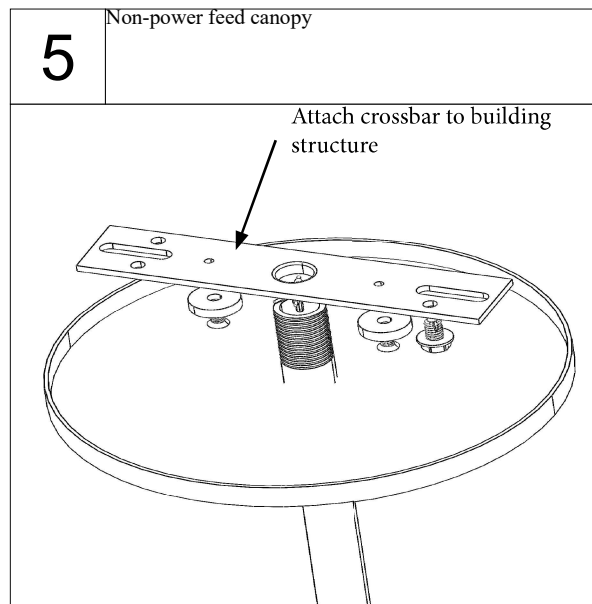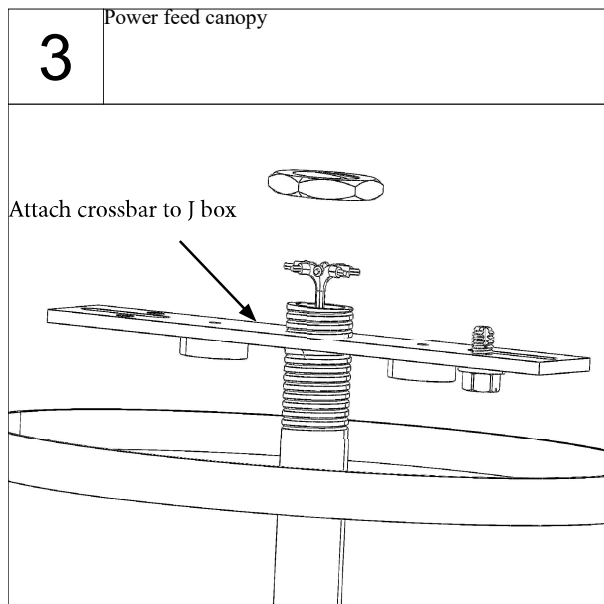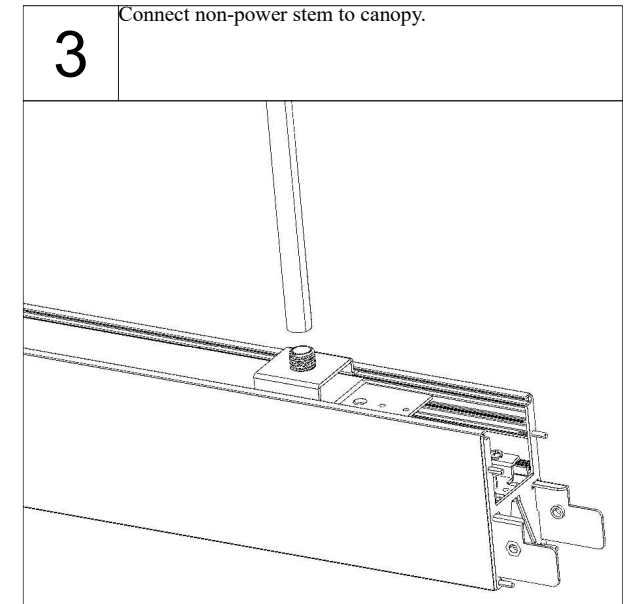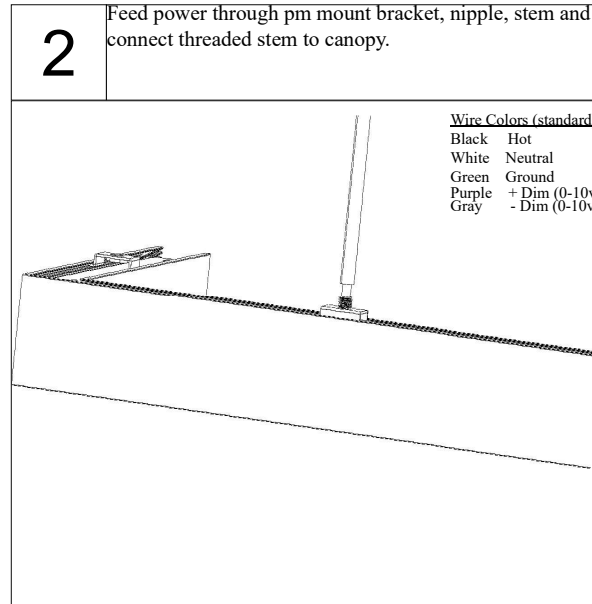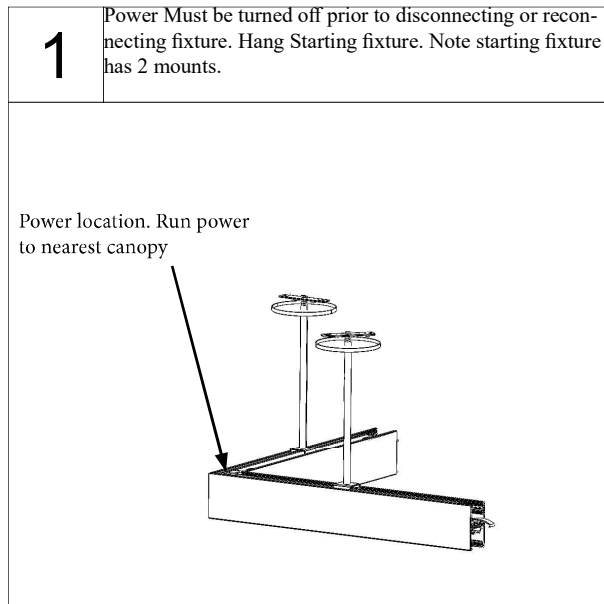

INSTALLATION INSTRUCTIONS

Shape Continuous Stem With Canopy Cont. (STEMxxx) L

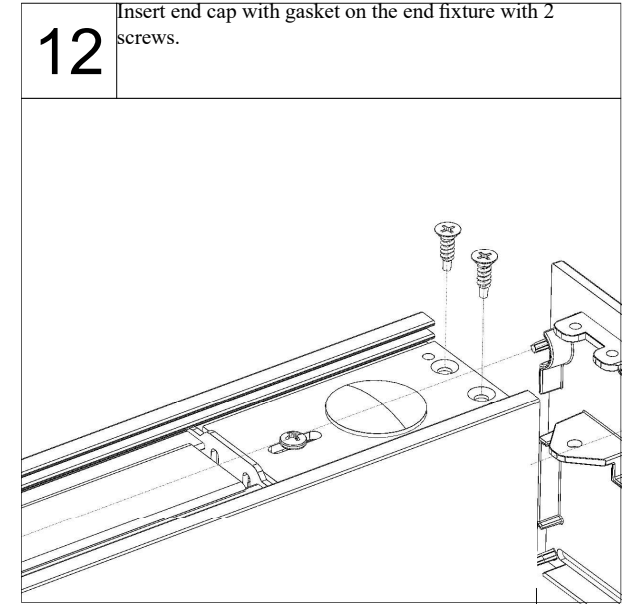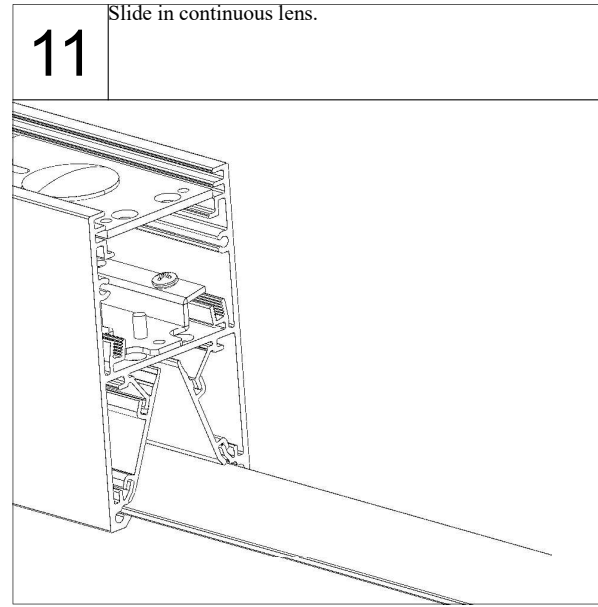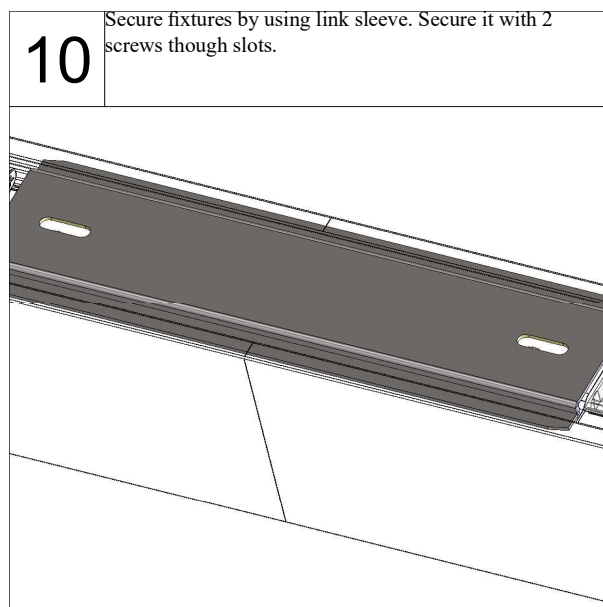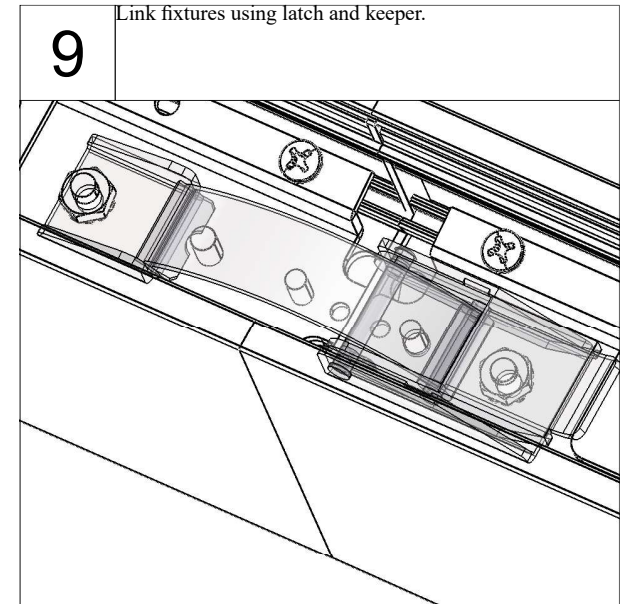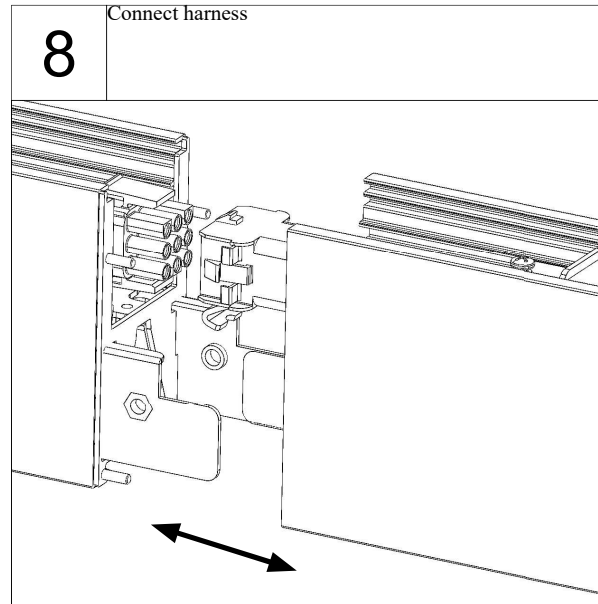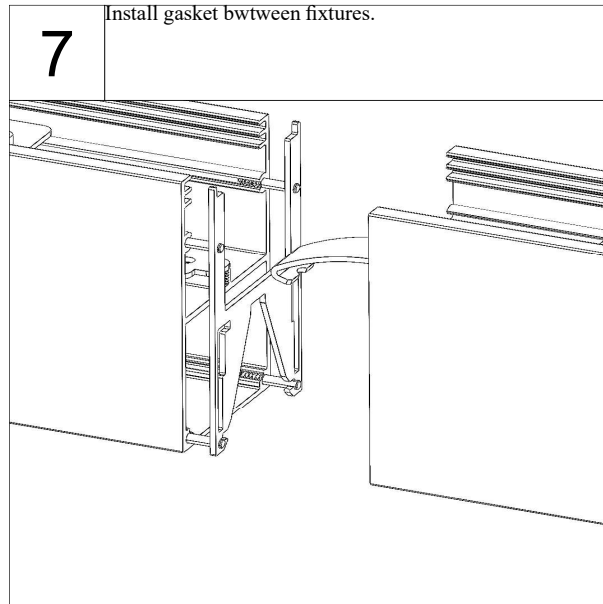


INSTALLATION INSTRUCTIONS

Shape Continuous Stem With Canopy Cont. (STEMxxx) L



6

Hang end fixture. End fixture has one mount which should not exceed 8' from the last mounting location. Repeat steps 3,5, & 7-12.

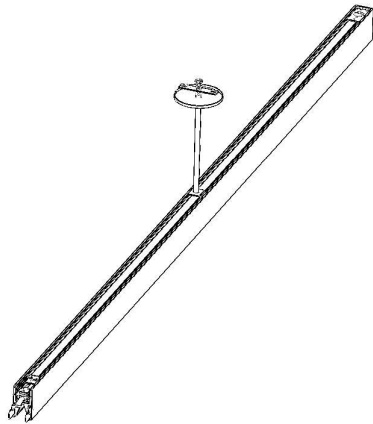

15

Restore power

