



Optimo Indirect

Type:	
Project:	
REP/Agent:	
Order #:	

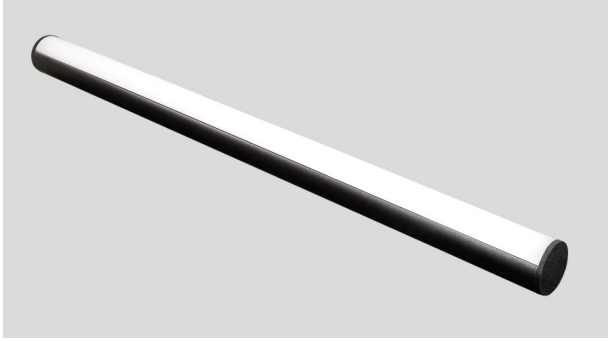

DIMENSIONS



FEATURES

- Single piece aluminum extrusion housing
- Individual 2', 4', 6' and 8' units, or continuous rows
- Linear runs with proprietary joiner design
- Efficacy up to 140 lm/W
- Soft diffuse direct lighting
- Textured powder coat finishes available in white, black and silver
- Premium finishes also available
- Approved for dry and damp locations
- 0-10v dimming is standard
- Dim to 1% of output current is standard
- 90 CRI (R9 50 min) available
- CA Title 24 / JA8 installation compatible



ORDERING LOGIC

OPTI	LENGTH	LUMENS PER FOOT	SD	CCT	CRI
OPTI	xx= Run Length Sxx= Symmetric Run Length	350= 350 LPF 500= 500 LPF 750= 750 LPF 1000= 1000 LPF XXX= Custom LPF	SD= SatinIce Diffuse	30K= 3000K 35K= 3500K 40K= 4000K 50K= 5000K TW= Tunable White ¹ (2700-6500K)	80= 80 90= 90 (R9 50 min)
FINISH	MOUNTING	VOLTAGE	ELECTRICAL	OPTIONS	
STANDARD PW= Powder Coat White PB= Powder Coat Black PS= Powder Coat Silver	CABLES WITH CANOPY KITS ACW05= White Cord 5' ACW10= White Cord 10' ACB05= Black Cord 5' ACB10= Black Cord 10'	U= 120-277 C= 347	1C= Single Circuit MC= Multiple Circuits <i>(multiple switch legs across run length)</i> EC= Emergency Circuit <i>(separate power drops for EC fixtures)</i> GTD= Generator Transfer Device	SPECIALTY DRIVERS (Standard driver is 0-10V, dim to 1% output current) DT1= eldoLED EcoDrive Dim to 1% (0-10V) DTZ= eldoLED SoloDrive Dim to 0.1% (0-10V) PSRD= Philips Sensor Ready (DALI) Driver LDE1= Lutron Hi-Lume EcoSystem LED driver with Soft-on, Fade-to-Black TW-A= Tunable White, 0-10v ² TW-EL= eldoLED DUALdrive Tunable White (DALI) ² PSQ02U= Lutron T-Series 1% 2-Channel Tunable White driver ²	
PREMIUM RALxxxx= Powder Coat RAL xxxx PSFx= Prem Stock Finish <i>(See Pg. 6)</i> BCH= Brushed Champagne	STEMS WITH CANOPY KITS STEMWxx= Stem White, xx" STEMBxx= Stem Black, xx"			BATTERIES ("#" indicates quantity) #EMB6= 6W EM Battery #EMB10= 10W EM Battery	
CUSTOM PO= Powder Other				SENSORS AWN-R= Lutron Athena Wireless Node (RF only) ³ - White Finish AWN-B= Lutron Athena Wireless Node (RF only) ³ - Black Finish	

EXAMPLE: OPTI-40-750-SD-35K-80-PW-ACW10-U-1C-1EMB10

¹ Tunable White Driver must be specified in options
² 50 Watt Max. Dual driver required for higher fixture wattage
³ DALI driver for static & DALI-2 Type 8 for tunable.