



# RECESSED SLIM BEAM

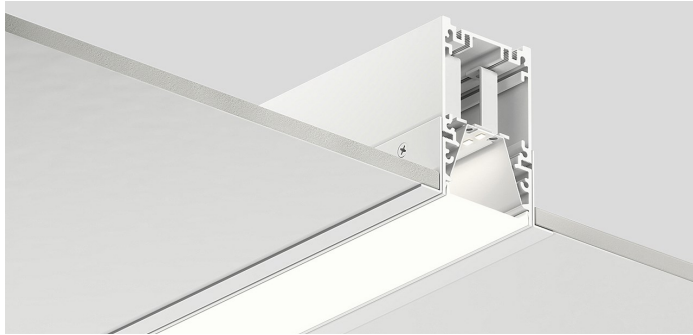

## DIMENSIONS

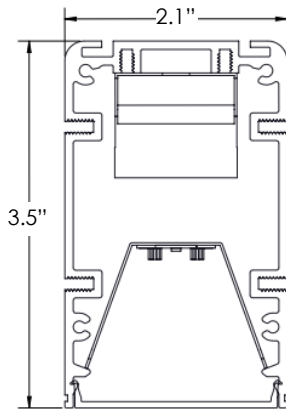

Type:	
Project:	
REP/Agent:	
Order #:	



## 5 DAY TURNAROUND

### FEATURES

- ★ Shipment up to 500' in 5 working days
- ★ Continuous lensing - runs up to 150'
- ★ Standard 2', 4', 6' and 8' units or continuous rows
- ★ Single piece aluminum extrusion housing
- ★ Linear runs with proprietary joiner design
- ★ Snap-in lens and reflector for easy installation
- ★ 3 Step MacAdam ellipse binning
- ★ Efficacy up to 116 lm/W
- ★ Approved for dry and damp locations
- ★ 0-10v dimming is standard
- ★ Dim to 1% of output current is standard
- ★ IC Rated
- ★ L70 > 50,000 hours



### LUMEN PACKAGES

Based on 3500K CCT. Other CCT available.

MODEL	LUMENS	INPUT WATTS	Lm/W
WS-RSLIM-4-1000-SD-35K	4,000	39	103
WS-RSLIM-8-1000-SD-35K	8,000	75	107

## ORDERING LOGIC

WS-RSLIM						
SERIES	LENGTH	LUMENS PER FOOT	DISTRIBUTION	CCT	CRI	FINISH
WS-RSLIM	xx= Run Length	350= 350 LPF 500= 500 LPF 750= 750 LPF 1000= 1000 LPF XXX= Custom LPF	SD= SatinIce Diffuse WD= Wide Diffuse	30K= 3000K 35K= 3500K 40K= 4000K	80= 80	<b>STANDARD</b> PW= Powder Coat White PB= Powder Coat Black

--	--	--	--	--	--	--

MOUNTING	VOLTAGE	ELECTRICAL	OPTIONS
<b>T-GRID</b> TBX= 9/16" Grid 15/16" Grid 9/16" Grid (Tegular Tile) 15/16" Grid (Tegular Tile) 9/16" Screw Slotted T-Grid	U= 120-277	1C= Single Circuit	<b>BATTERIES</b> #EMB6= 6W EM Battery (Bodine BSL06T3) (# indicates quantity) #EMB10= 10W EM Battery (Bodine BSL10T3) (# indicates quantity) <i>Only available on individual units for 5 Day turnaround.</i>

**DRYWALL WITH COSMETIC BEZEL**  
DWC(B)= Cosmetic Bezel White  
DWC(B)= Cosmetic Bezel Black

**DRYWALL WITH SPACKLE FLANGE**  
DWSF= Drywall w/ Spackle Flange


**EXAMPLE: WS-RSLIM-20-500-SD-35K-80-PW-TBX-U-1C-1EMB10**

# RECESSED SLIM BEAM


Type:	
Project:	
REP/Agent:	
Order #:	

## MOUNTING OPTIONS


### DWSF - Drywall W/Spackle Flange

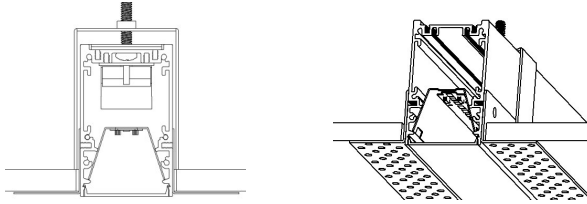

### DWCB - Drywall W/Cosmetic Bezel

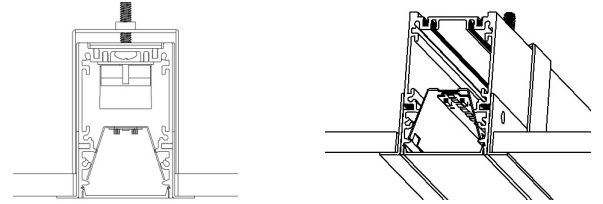

## T-BAR/T-GRID Options - TBX

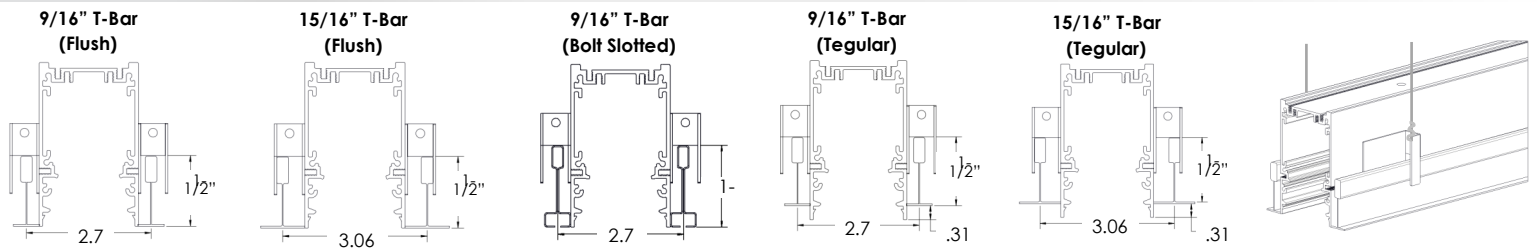


## T-GRID LENS AND HOUSING LENGTHS


### Individual & Continuous Run

The lengths of individual fixtures and run lengths specified in the ordering logic is the distance between the centers of the T-Grids. The actual length of the fixtures and the lens will be shorter from that specified length. In a run, the last fixture compensates for the T-Grid.

#### 4' FIXTURE

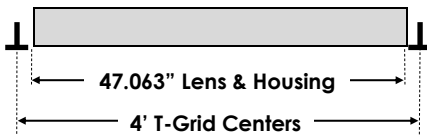

#### 8' FIXTURE

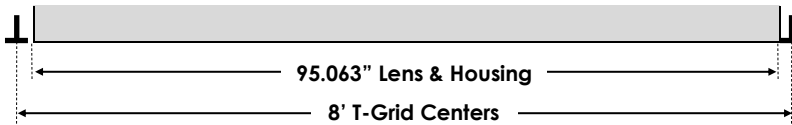

#### 12' RUN



## SPECIFICATIONS

### Housing

Nominal 2.0" x 3.5" x .075 thick housing of continuous extruded 6063 T5 aluminum.

### Luminaire Length

2', 4', 6' or 8' lengths are available for a single stand-alone section. Using internal joiners, sections can be joined to form longer rows.

### Battery

Philips Bodine lithium ion battery providing up to 720lm(6W) or up to 1200lm(10W) for 90 minutes. UL924 listed. Class 2 compliant. Meets Title 20 CEC (California Energy Commission) efficiency standards.

### Source

Four standard lumen packages are available in four color temperature options (3000K, 3500K, 4000K and 5000K) — all within 3 MacAdam ellipses.

### Certification

Intertek cETLus Listed. RoHS (Restriction of Hazardous Substances) and Buy American Act compliant.

### Environment

Suitable for dry and damp locations.  
Operating temp.: -40°C to +45°C  
-40°F to +113°F

### Dimming Driver

Universal Lighting Technologies (ULT) Everline series of LED drivers allows tunable output currents to achieve infinite configurations of output. UL Class 2 recognized. 0-10v interface can be wired as Class 1 or Class 2 circuit. Included 2.5Kw ring and wave overcurrent protection, isolation of each individual output and a fully potted driver to protect from heat and vibration. Power factor <.93

### Packaging

Sustainably manufactured outside cardboard box and biodegradable, protective poly-foam luminaire inserts.