


## BEAM DIRECT/INDIRECT



### DIMENSIONS

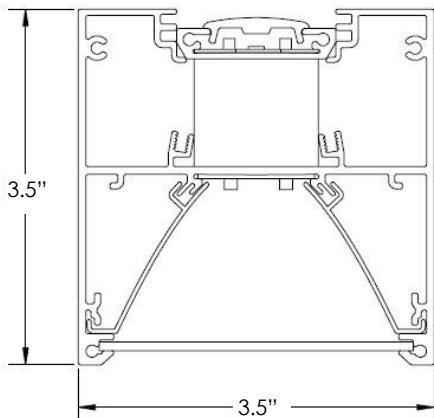

### ORDERING LOGIC

WS-BEAMDI						
SERIES	LENGTH	DIRECT LUMENS PER FOOT	INDIRECT LUMENS PER FOOT	DIRECT DISTRIBUTION	INDIRECT DISTRIBUTION	CCT

WS-BEAMDI	xx= Run Length	350= 350 LPF 500= 500 LPF 750= 750 LPF 1000= 1000 LPF XXX= Custom LPF	350= 350 LPF 500= 500 LPF 750= 750 LPF 1000= 1000 LPF XXX= Custom LPF	SD= SatinIce Diffuse WD= Wide Diffuse	CL=Clear Lens BW=Batwing	30K= 3000K 35K= 3500K 40K= 4000K
-----------	----------------	---	---	--	-----------------------------	--

CRI	FINISH	MOUNTING	VOLTAGE	ELECTRICAL	OPTIONS
-----	--------	----------	---------	------------	---------

80= 80	<u>STANDARD</u>  PW= Powder Coat White PB= Powder Coat Black	<u>CABLES WITH CANOPY KITS</u>  ACW05= White Cord 5' ACW10= White Cord 10' ACB05= Black Cord 5' ACB10= Black Cord 10'	U= 120-277	1C= Single Circuit	<u>BATTERIES</u>  #EMB6= 6W EM Battery (Bodine BSL06T3)(# indicates quantity) #EMB10= 10W EM Battery (Bodine BSL10T3)(# indicates quantity) Only available on individual units for 5 Day turnaround.
--------	---	--	------------	--------------------	--

CABLES WITH LOOPS  
ALW10= White Cord 10'  
ALB10= Black Cord 10'

Type:	
Project:	
REP/Agent:	
Order #:	



### 5 DAY TURNAROUND

#### FEATURES

- ★ Shipment up to 500' in 5 working days
- ★ Continuous lensing standard- runs up to 200'
- ★ Extruded aluminum single piece housing
- ★ Individual or continuous rows consisting of 2', 4', 6' and 8' fixtures
- ★ Linear runs with proprietary joiner design
- ★ Direct & Indirect light levels can be set to any combination at the factory
- ★ Efficacy up to 138 lm/W
- ★ Soft diffuse direct lighting
- ★ Textured powder coat finishes available in white and black
- ★ Approved for dry and damp locations
- ★ 0-10v dimming is standard
- ★ Dim to 1% of output current is standard



**Declare.**

#### LUMEN PACKAGES

Based on 3500K CCT. Other CCT available.

MODEL	LUMENS	INPUT WATTS	Lm/W
WS-BEAMDI-4-750-500-WD-BW-35K-80	5,000	41	121
WS-BEAMDI-8-750-500-WD-BW-35K-80	10,000	78	128




**EXAMPLE: WS-BEAMDI-40-750-500-WD-BW-35K-80-PW-ACW10-U-1C**

# BEAM DIRECT/INDIRECT




Type:	
Project:	
REP/Agent:	
Order #:	

## MOUNTING OPTIONS

### ACxxx (Aircraft Cable with Canopy) - Drywall, Solid, Tile (On-Grid), Tile (Off-Grid)

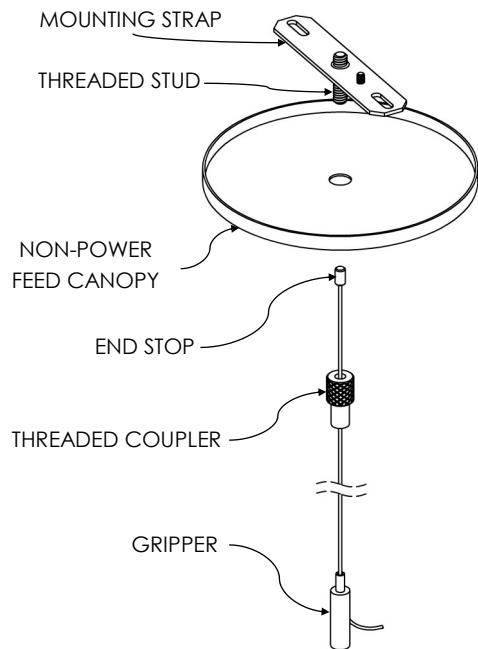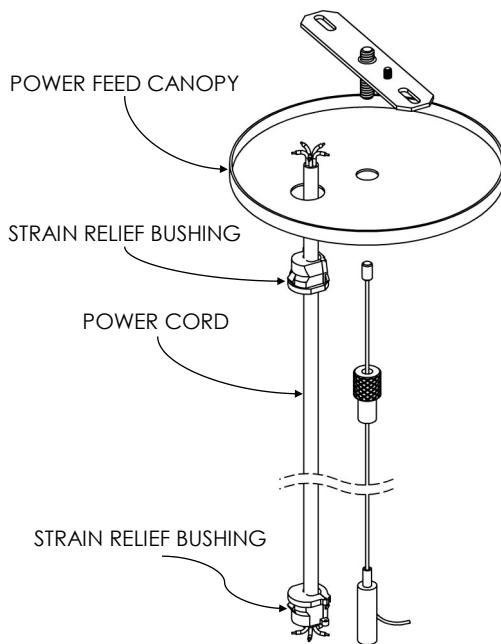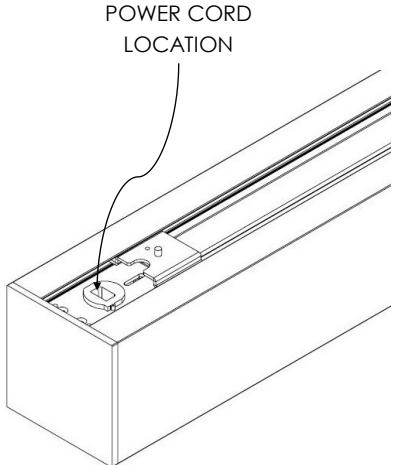

### ALxxx (Aircraft Cable with Loops)

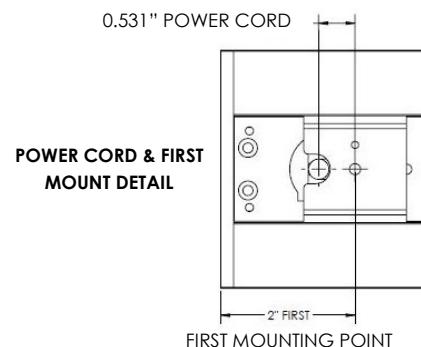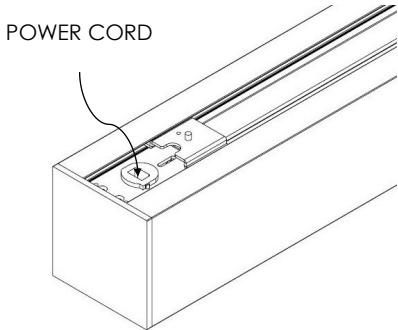

## SPECIFICATIONS

### Housing

Nominal 3.5" x 3.5" x .075" thick housing of continuous extruded 6063 T5 aluminum.

### Color

Colors for the housing are available in a powder coated white and black.

### Luminaire Length

2', 4', 6' & 8' lengths are available for a single stand-alone section. Using internal joiners, these sections can be joined to form longer runs.

### End Caps

Injection molded flat end caps are mechanically attached with no exposed fasteners to enhance architectural aesthetic and prevent light leak.

### Source

Lumen packages are available in three color temperature options (3000K, 3500K and 4000K) - all within 3 MacAdam ellipses.

### Certification

Intertek cETLus Listed. RoHS (Restriction of Hazardous Substances) and Buy American Act compliant.

### Lensing

0.080" thick impact resistant acrylic lensing.

### Packaging

Sustainably manufactured outside cardboard box and biodegradable, protective poly-foam luminaire inserts.

### Environment

Suitable for dry and damp locations.

Operating temp.: -40°C to +50°C  
-40°F to +122°F

### Dimming Driver (Integral Driver)

Constant current programmable LED driver. UL listed, class P, 0-10V, dim to 1% of output current. 2.5KV ring wave surge protection and >.90 power factor.

### Warranty

[http://www.starteklightingamerica.com/images/pdf/warranty/Beam\\_Series\\_Warranty.pdf](http://www.starteklightingamerica.com/images/pdf/warranty/Beam_Series_Warranty.pdf)