


Type:	
Project:	
REP/Agent:	
Order #:	


BEAM DIRECT/INDIRECT




DIFFUSING




FLUSH, H: 3.5"



DL05, H: 4.0"



DL10, H: 4.5"




DL15, H: 5.0"


FEATURES

- ★ Continuous lensing standard—runs up to 200'
- ★ Extruded aluminum single piece housing
- ★ Standard 2', 4', 6' and 8' units, or continuous rows
- ★ Linear runs with proprietary joiner design
- ★ Direct & Indirect light levels can be set to any combination at the factory
- ★ Efficacy up to 140 lm/W
- ★ Soft diffuse direct lighting
- ★ Textured powder coat finishes available in white, black and silver
- ★ Premium finishes also available
- ★ Approved for dry and damp locations
- ★ 0-10v dimming is standard
- ★ Dim to 1% of output current is standard
- ★ 90 CRI (R9 50 min) available
- ★ CA Title 24 / JA8 installation compatible
- ★ L70 > 50,000 hours
- ★ Consult factory for TM21, TM30, LM79 and LM80


DIMENSIONS

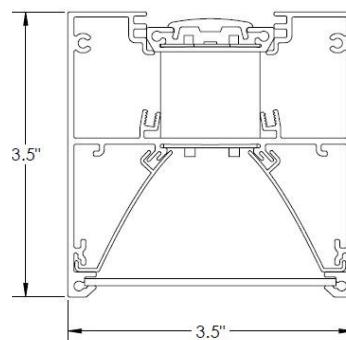

DISTRIBUTION



Direct: SD= SatinIce Diffuse
Indirect: CL= Clear



Direct: WD= Wide Diffuse
Indirect: BW= Batwing



Declare.

Type:	
Project:	
REP/Agent:	
Order #:	

BEAM DIRECT/INDIRECT

BEAMDI					
SERIES	LENGTH	DIRECT LUMENS PER FOOT	INDIRECT LUMENS PER FOOT	DIRECT DISTRIBUTION	INDIRECT DISTRIBUTION
BEAMDI	xx= Run Length	350= 350 LPF	350= 350 LPF	SD= SatinIce Diffuse	CL= Clear Lens
	Sxx= Symmetric Run Length	500= 500 LPF	500= 500 LPF	WD= Wide Diffuse	BW= Batwing
	_x_RECT= Rectangle	750= 750 LPF	750= 750 LPF	WW= Wall Wash	
	_x_L= L-Shape	1000=1000 LPF	1000= 1000 LPF	DL05= Satin Diffuse 0.5" Drop	
	_x_x_U= U-Shape	XXX= Custom LPF	XXX= Custom LPF	DL10= Satin Diffuse 1.0" Drop	
				DL15= Satin Diffuse 1.5" Drop	
				DLLE05= 0.5" Drop w/ Lit Ends	
				DLLE10= 1.0" Drop w/ Lit Ends	
				DLLE15= 1.5" Drop w/ Lit Ends	
				Seamless Continuous Lensing Unavailable for "DL" Options	

CCT	CRI	FINISH	MOUNTING	VOLTAGE	ELECTRICAL
30K= 3000K	80= 80	<u>STANDARD</u>	<u>CABLES WITH CANOPY KITS</u>	U= 120-277	1C= Single Circuit
35K= 3500K	90= 90 (R9 50 min)	PW= Powder Coat White	ACW05= White Cord 5'	C= 347	2C= Separate D/I Circuits
40K= 4000K		PB= Powder Coat Black	ACW10= White Cord 10'		(separate control of direct and indirect)
50K= 5000K		PS= Powder Coat Silver	ACB05= Black Cord 5'		MC= Multiple Circuits
TW= Tunable white ¹ (2700-6500K)			ACB10= Black Cord 10'		(multiple switch legs across run length)
		<u>PREMIUM</u>	<u>CABLES WITH LOOPS</u>		EC= Emergency Circuit
		RALxxxx= Powder Coat RAL xxxx (Gloss Finish)	ALW10= White Cord 10'		(separate power drops for EC fixtures)
		PSFx= Prem Stock Finish	ALB10= Black Cord 10'		GTD= Generator Transfer Device
		<u>CUSTOM</u>	<u>WALL MOUNTS</u>		
		PO= Powder Other	WM= Wall Mount		
			AWM= Architectural Wall Mt		
			EWM= Extruded Wall Mount		
			<u>STEM WITH CANOPY KITS</u>		
			STEMWxx= Stem White, xx"		
			STEMBxx= Stem Black, xx"		
See pg.8 for standard and premium options					

OPTIONS

SPECIALTY DRIVERS (Standard driver is 0-10V, dim to 1% output current)

DT1=eldoLED EcoDrive Dim to 1% (0-10V)
DT2=eldoLED SoloDrive Dim to 0.1% (0-10V)
PSRD=Philips Sensor Ready (DALI) Driver
LDE1=Lutron Hi-Lume EcoSystem LED driver with Soft-on, Fade-to-Black
TW-A=Tunable White, 0-10v²
TW-EL=eldoLED DUALdrive Tunable White (DALI)²
PSQ02U=Lutron T-Series 1% 2-Channel Tunable White driver²

SENSORS

DMxx%=Daylight/Motion Sensor (xx% = % Min. Dimming)
VDO=Lutron Vive Integral fixture control (RF w/ daylight and occupancy)
AWNR-W= Lutron Athena Wireless Node (RF only)³ - White Finish
AWNR-B= Lutron Athena Wireless Node (RF only)³ - Black Finish

BATTERIES

#EMB6=6W EM Battery (Bodine BSL06T3)
#EMB10=10W EM Battery (Bodine BSL10T3)
#FCEMB10= 10W EM Battery (Factory Choice)

¹ Tunable White Driver must be specified in options




² 50 Watt Max. Dual driver required for higher fixture wattage

³ D4i driver for static & DALI-2 Type 8 for tunable.




EXAMPLE: BEAMDI-40-500-750-WD-BW-35K-90-PW-ACW10-U-1C-1EMB10

MOUNTING OPTIONS



ACxxx (Aircraft Cable with Canopy) - Drywall, Solid, Tile (On-Grid), Tile (Off-Grid)

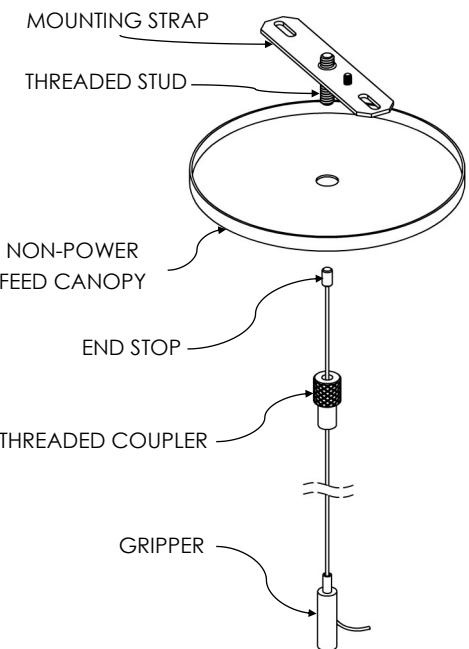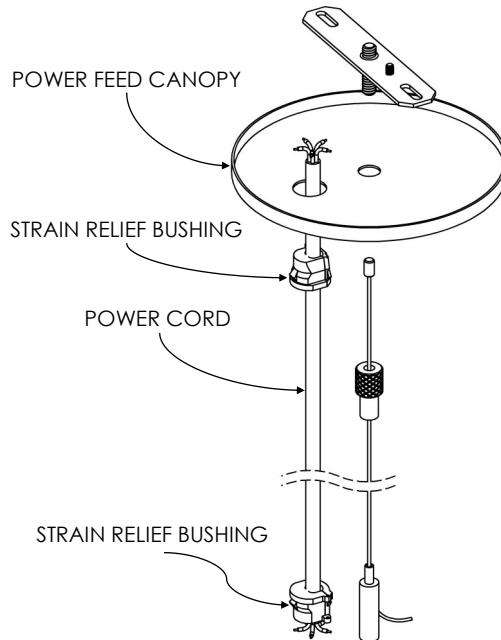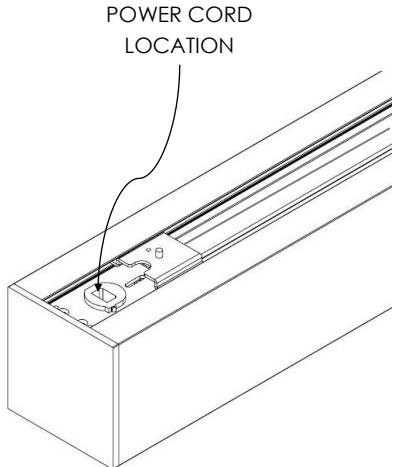



ALxxx (Aircraft Cable with Loops)

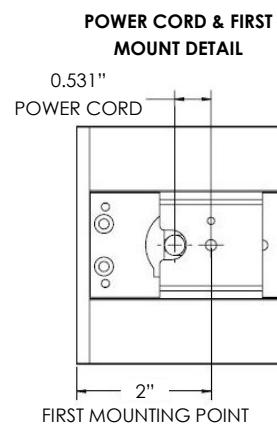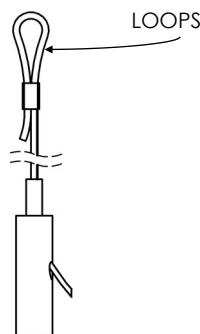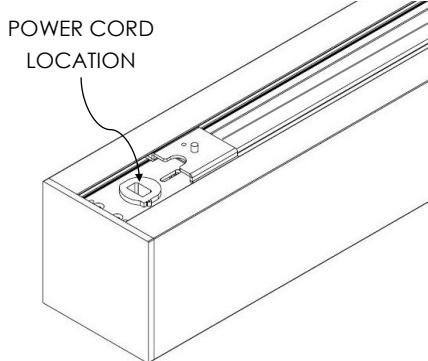

AWM (Architectural Wall Mount)


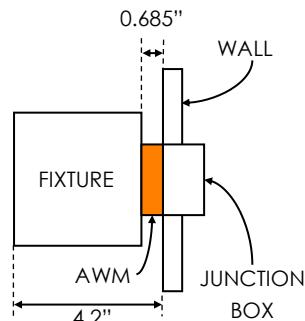
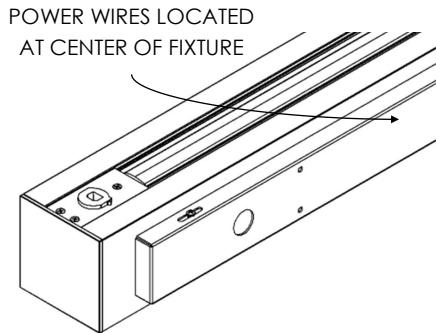


WM (Wall Mount)

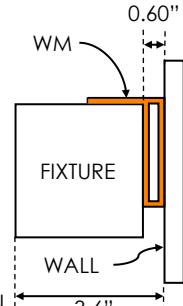
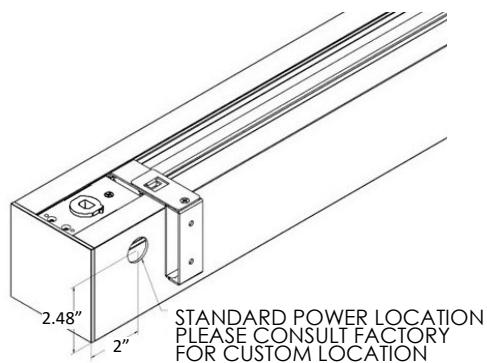


MOUNTING OPTIONS, CONTINUED

EWM (Extruded Wall Mount)

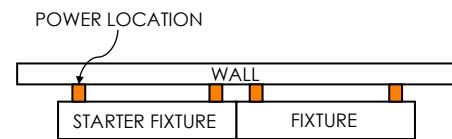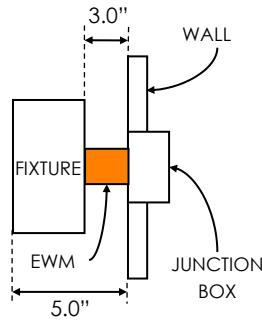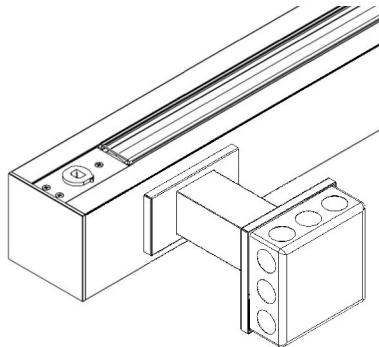

STEMWxx, STEMBxx (Stem Mount)

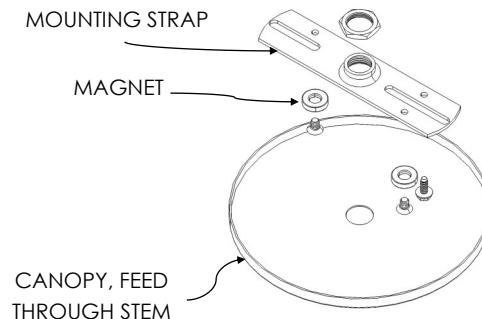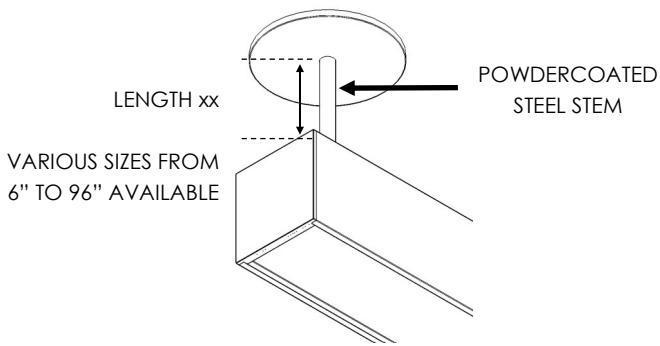

ROW CONFIGURATIONS

xx (Run Length)

The standard construction of run lengths follows the logic of the table below. Consult factory for additional information.

		Total Length																																													
		2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40							
# of Sections	2	1																																													
	3		1																																												
	4			1						1	1	1	1					1	1	1	1						1	1	1	1					1	1	1	1									
	5				1				1			1					1				1						1				1																
	6					1				1				1				1				1					1				1																
	7						1				1				1			1				1					1				1																
	8							1				1	1	1	1	2	1	1	1	2	2	2	2	3	2	2	2	3	3	3	3	4	3	3	3	4	4	4	4								

NOTE: Fixtures in continuous runs are available in 6" increments. Consult factory for smaller increments.

Sxx (Symmetric Run)

The construction of Sxx (y') is to build with equal length fixtures. The xx indicates the run length. The y' indicates the fixture length used to create the run. Please indicate this on your P.O. when placing your order.

\$12' (2')	2'	2'	2'	2'	2'	2'
\$12' (3')	3'	3'	3'	3'	3'	3'
\$12' (4')	4'	4'	4'	4'	4'	4'
\$12' (6')	6'	6'	6'	6'	6'	6'

MOUNTING LOCATIONS


Each starter or individual fixture will be provided with (2) mounting supports (●). Each additional fixture will be provided with (1) support which can be located anywhere along the 2nd half of the fixture (highlighted below):

Examples of continuous run mounting locations are as follows:


12' RUN	●	8'	●	4'	
16' RUN	●	8'	●	8'	
20' RUN	●	8'	●	8'	4'
24' RUN	●	8'	●	8'	8'
28' RUN	●	8'	●	8'	8' 4'

JOINT SHAPE CONFIGURATION WITH MITER CUTS


We provide joint configurations in the stock size of 24" X 24" as shown below.

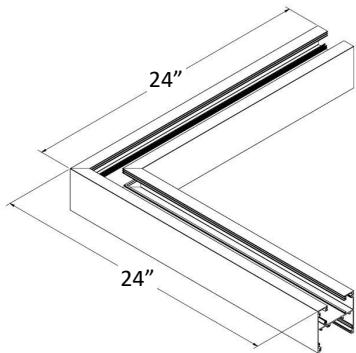


_x_RECT
Rectangle
Supply AxB dimensions

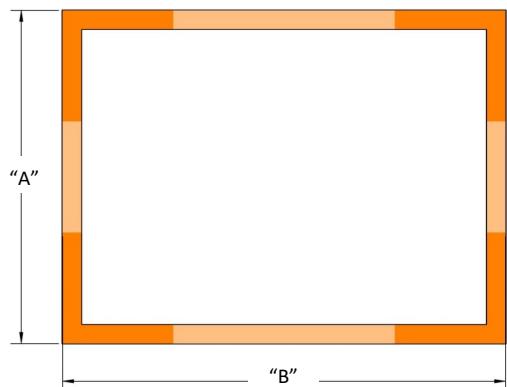

_x_L
L-Shape
Supply AxB dimensions

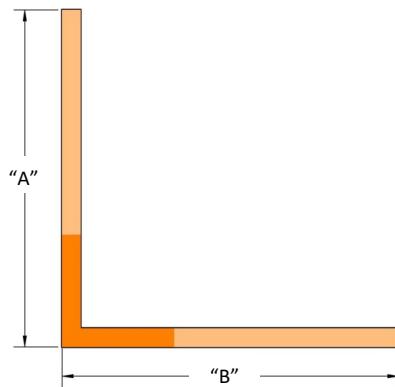


_x_x_U
U-Shape
Supply AxBxC dimensions

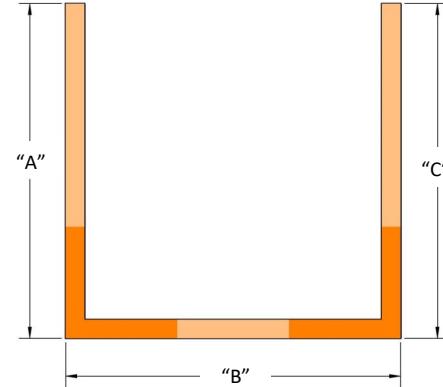


LENS OPTIONS

FLUSH

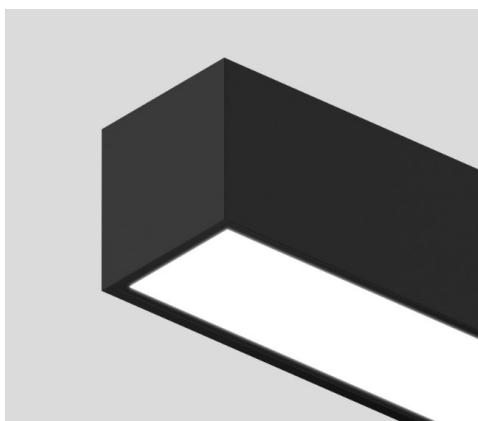

STANDARD DROP LENS

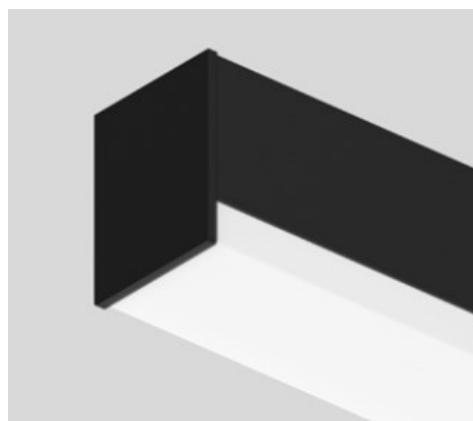


DROP LENS w/ LIT ENDS



PERFORMANCE


BEAMDI-X-775-475-SD-CL (80+ CRI)

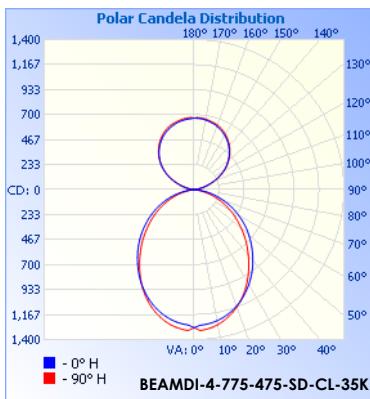

Model	Lumens	Watts	LPW
BEAMDI-4-775-475-SD-CL-30K	5,000	41	123
BEAMDI-4-775-475-SD-CL-35K	5,000	39	128
BEAMDI-4-775-475-SD-CL-40K	5,000	38	131
BEAMDI-4-775-475-SD-CL-50K	5,000	37	135

Model	Lumens	Watts	LPW
BEAMDI-8-775-475-SD-CL-30K	10,000	78	128
BEAMDI-8-775-475-SD-CL-35K	10,000	75	133
BEAMDI-8-775-475-SD-CL-40K	10,000	74	136
BEAMDI-8-775-475-SD-CL-50K	10,000	71	140


BEAMDI-X-450-750-WD-BW (80+ CRI)

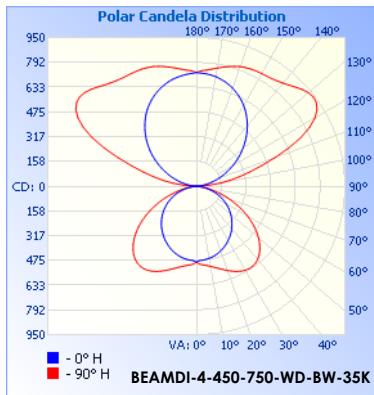

Model	Lumens	Watts	LPW
BEAMDI-4-450-750-WD-BW-30K	4,800	40	121
BEAMDI-4-450-750-WD-BW-35K	4,800	38	126
BEAMDI-4-450-750-WD-BW-40K	4,800	37	130
BEAMDI-4-450-750-WD-BW-50K	4,800	36	133

Model	Lumens	Watts	LPW
BEAMDI-8-450-750-WD-BW-30K	9,600	76	126
BEAMDI-8-450-750-WD-BW-35K	9,600	73	131
BEAMDI-8-450-750-WD-BW-40K	9,600	71	135
BEAMDI-8-450-750-WD-BW-50K	9,600	70	138

BEAMDI-X-750-500-WD-BW (80+ CRI)

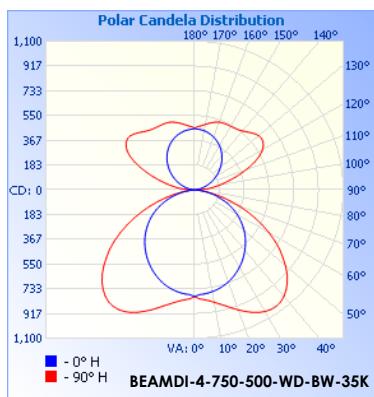


Model	Lumens	Watts	LPW
BEAMDI-4-750-500-WD-BW-30K	5,000	42	119
BEAMDI-4-750-500-WD-BW-35K	5,000	40	124
BEAMDI-4-750-500-WD-BW-40K	5,000	39	127
BEAMDI-4-750-500-WD-BW-50K	5,000	38	130

Model	Lumens	Watts	LPW
BEAMDI-8-750-500-WD-BW-30K	10,000	81	123
BEAMDI-8-750-500-WD-BW-35K	10,000	78	128
BEAMDI-8-750-500-WD-BW-40K	10,000	76	131
BEAMDI-8-750-500-WD-BW-50K	10,000	74	135

FINISHES**STANDARD FINISHES**

WHITE MINI TEXTURE

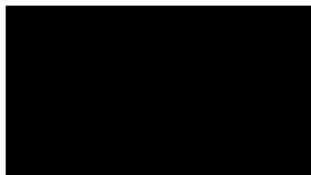


BLACK MINI TEXTURE



SILVER SPARKLE TEXTURE

PREMIUM STOCK FINISHES

PSF001 (WOOD#1)

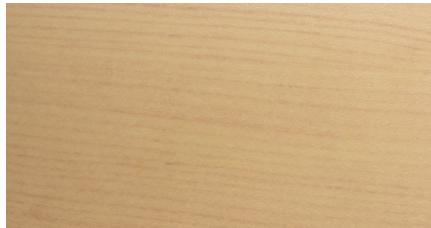

PSF002 (WOOD#2)



PSF003 (WOOD#3)



PSF004 (WOOD#4)



PSF005 (WOOD#5)



PSF006 (WOOD#6)



PSF007 (STONE #1)



PSF008 (STONE #2)



PSF009 (METAL #1)

NOTE: A minimal impact to lead times will apply to products specified with Premium Stock Finishes (PSF). It is not to be assumed that these finishes are stocked in our warehouse, but rather, are readily available to us for your project.

All other custom finishes (PO) will incur a set up fee and will add an extended lead time to your project.

SPECIFICATIONS

Housing

Nominal 3.5" x 3.5" x .075" thick housing of continuous extruded 6063 T5 aluminum.

Color

Colors for the housing are available in a powder coated white, black, silver, and woodgrain with end cap to match. Consult factory for custom colors.

Luminaire Length

2', 4', 6' or 8' lengths are available for a single stand-alone section. Using internal joiners, these sections can be joined to form longer rows.

End Caps

Injection molded flat end caps are mechanically attached with no exposed fasteners to enhance architectural aesthetic and prevent light leak.

Source

Lumen packages are available in four color temperature options (3000K, 3500K, 4000K and 5000K) — all within 3 MacAdam ellipses.

Certification

Intertek cETLus Listed. RoHS (Restriction of Hazardous Substances) and Buy American Act compliant.

Battery

Philips Bodine lithium ion battery providing up to 780lm (6W) or up to 1300lm(10W) for 90 minutes. UL924 listed. Class 2 compliant. Meets Title 20 CEC (California Energy Commission) efficiency standards.

Lensing

0.080" thick impact resistant acrylic lensing.

Environment

Suitable for dry and damp locations.

Operating temp.: -40°C to +50°C

-40°F to +122°F

Dimming Driver (Integral Driver)

Constant current programmable LED driver. UL listed, class P, 0-10V, dim to 1% of output current. 2.5KV ring wave surge protection and >.90 power factor.


Packaging

Sustainably manufactured outside cardboard box and biodegradable, protective poly-foam luminaire inserts.

CONTROL

Sensor

Wattstopper FS-205 v2 Low Voltage PIR. Integrated photosensor for hold-off daylighting control. 24VDC operating voltage. Adjustable time delay (30 seconds to 30 minutes).

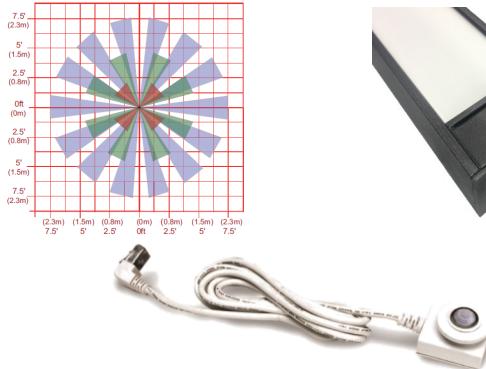

Wireless Node



COMPANION PRODUCTS


Beam Direct



Beam Surface Mount



Recessed Beam

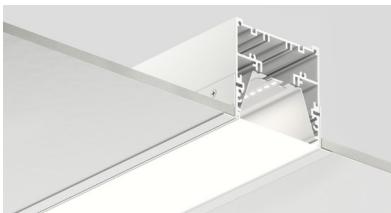

WARRANTY

5-year limited warranty. Complete warranty terms can be located at:

http://www.starteklightingamerica.com/images/pdf/warranty/Beam_Series_Warranty.pdf

Note: Actual performance may differ as a result of installation environment and final application.
All values are design or typical values, measured under laboratory conditions, at 25°C (77°F).