

# INSTALLATION INSTRUCTIONS



THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
CE PRODUIT DOIT ETRE INSTALLE SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAIT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHERENTS.
DISCONNECT POWER PRIOR TO ANY INSTALLATION.
DEBRANCHEZ LE COURANT AVANT TOUTE INSTALLATION.
CAP ALL WIRING CONNECTIONS WITH UL APPROVED WIRE CONNECTORS.
COUVRIR TOUTES LES CABLES AVE DES CONNECTIONS APPROUVES (UL).
VERIFY SUPPLY VOLTAGE MEETS LUMINAIRE LABEL SPECIFICATIONS.
VERIFIEZ QUE LA TENSION SOIT COMPATIBLE AVEC LES CARACTERISTIQUES DU LUMINAIRE MARQUE SUR LETIQUETTE.
ALLOW FIXTURE TO COOL BEFORE TOUCHING HEATSINK OR LIGHT SOURCE.
LAISSEZ LE PROJECTEUR REFOIDIR AVANT DE TOUCHER LE RADIATEUR OU LA SOURCE DE LUMIERE.
DO NOT ATTEMPT TO OPEN OR MAKE REPAIRS INSIDE LUMINAIRE.
NE PAS TENTER DOUVIRIR OU DE FAIRE DES REPARATINS A LINTERIEUR DU LUMINAIRE.
AVOID DIRECT VIEWING OF LIGHT SOURCE.
EVITEZ DE REGARDER DIRECTMENT LA SOURCE LUMINEUSE.
THIS PRODUCT MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN.
CE PRODUIT DOIT ITRE INSTALLE PAR UN ELECTRICIEN QUALIFIE.
SUITABLE FOR UNDER-CABINET MOUNT.
ADAPTE POUR SOUS-CABINET MOUNT.
SUITABLE FOR DAMP LOCATION.
ADAOTE POUR DES ENDROITS HUMIDES.
SUITABLE FOR CONTINUOUS ROW MOUNTING.
ADAPTE POUR CONTINU ROW MONTAGE.









VIBE D  
VIBE D/I

Note: All pictures shown are of the VIBE D







# INSTALLATION INSTRUCTIONS

## Individual Pendant Mount (ACxxx)

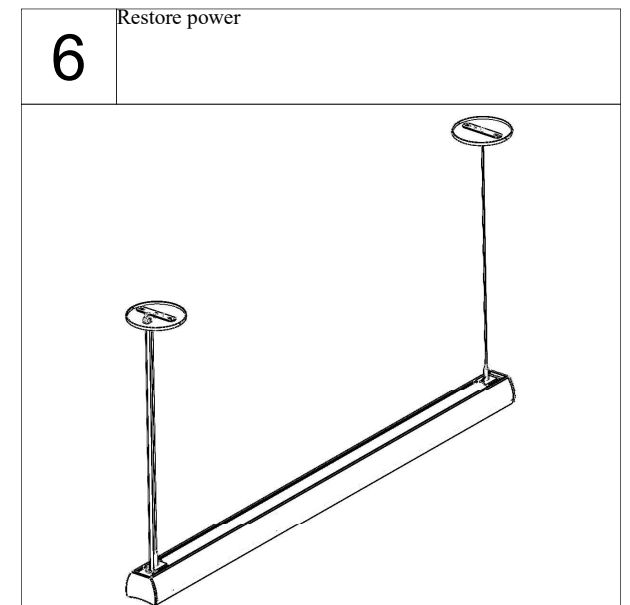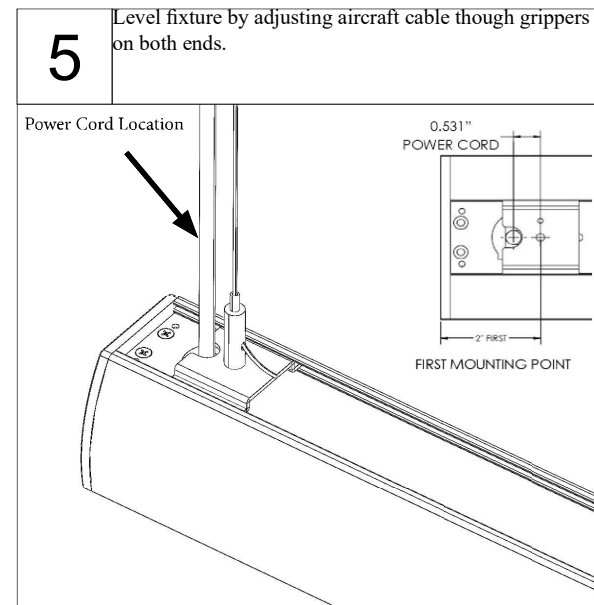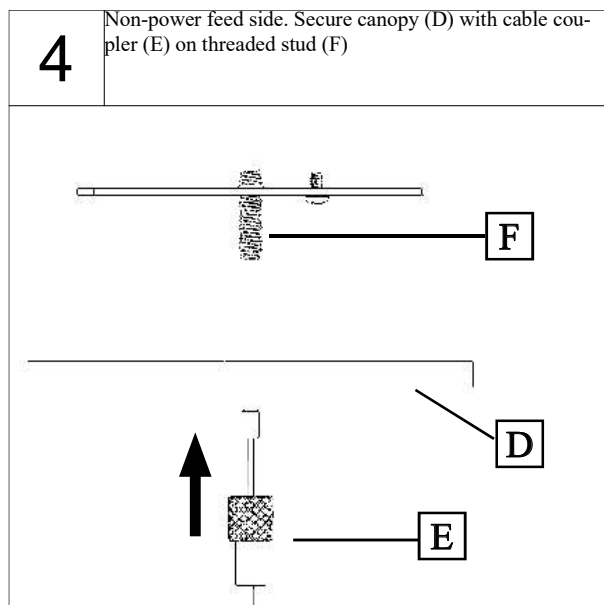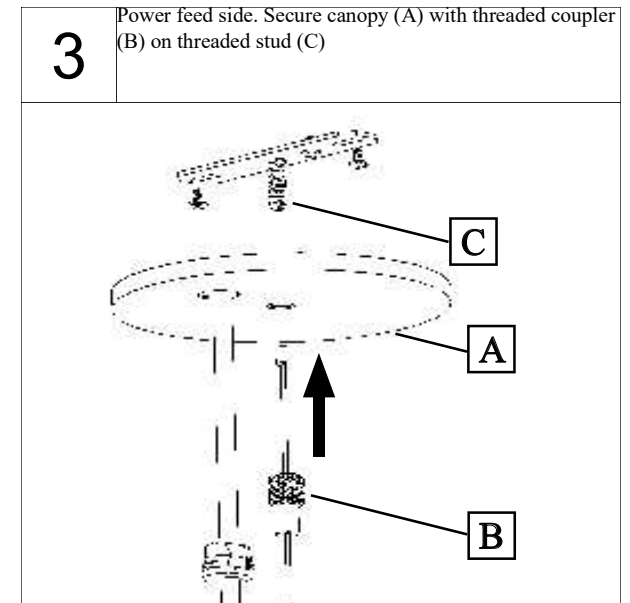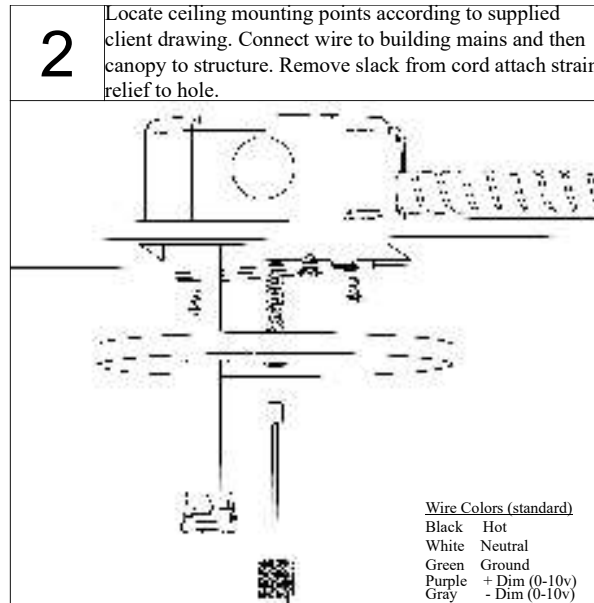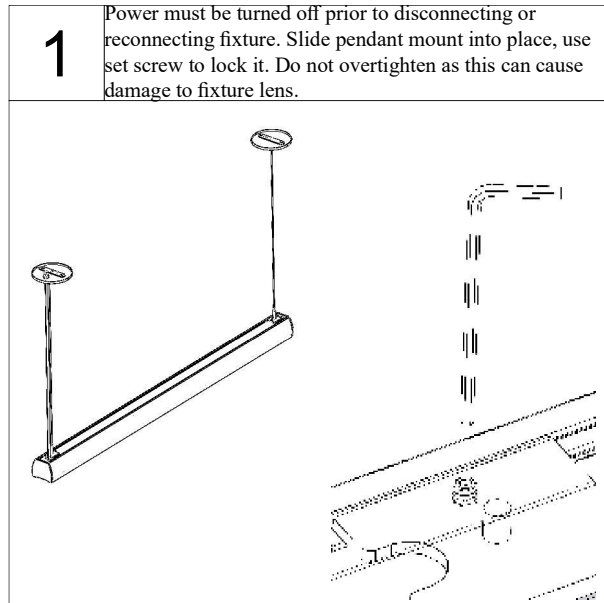






# INSTALLATION INSTRUCTIONS

## Continuous Pendant Mount Cont. (ACxxx)

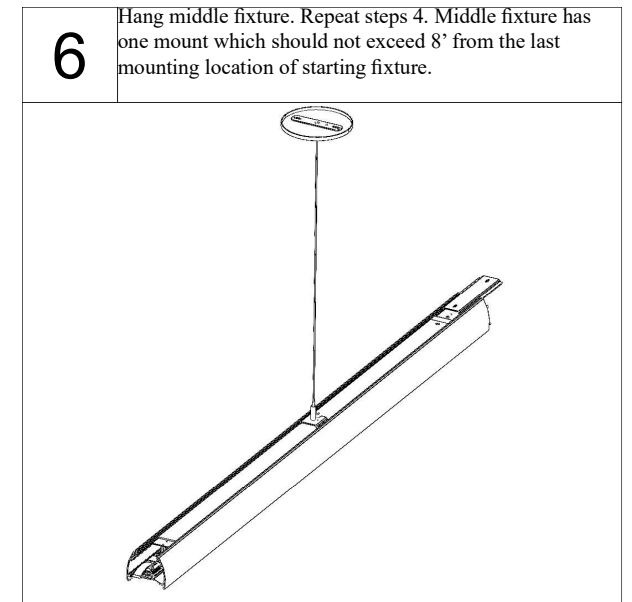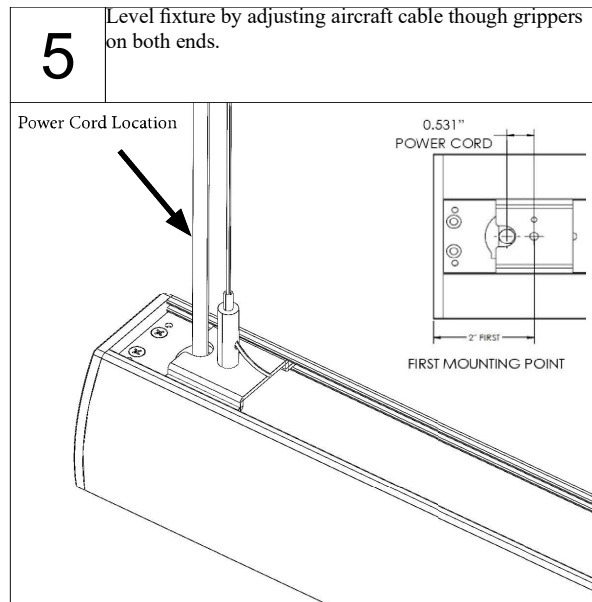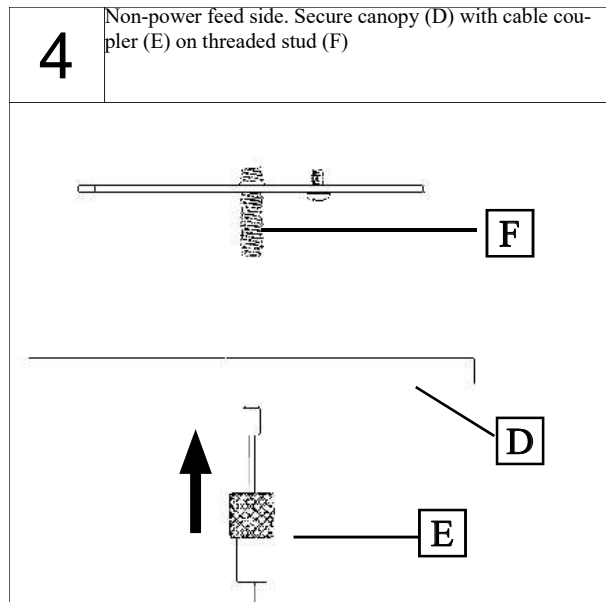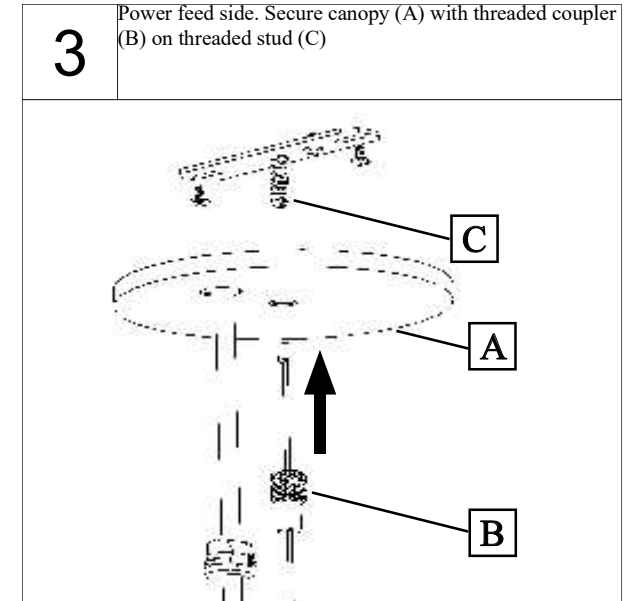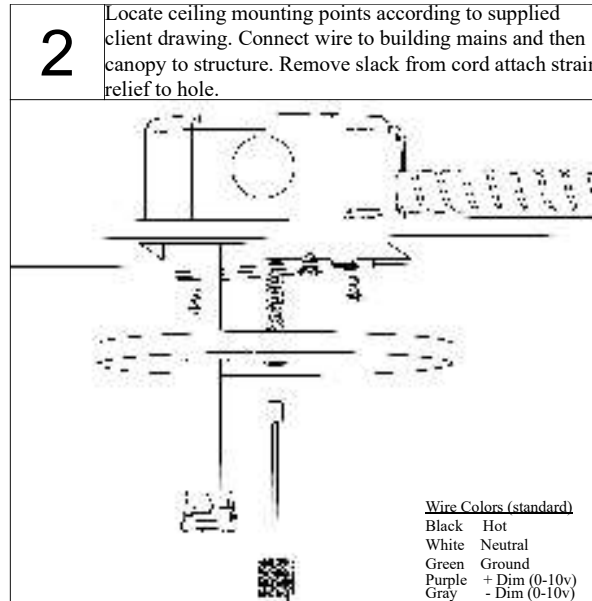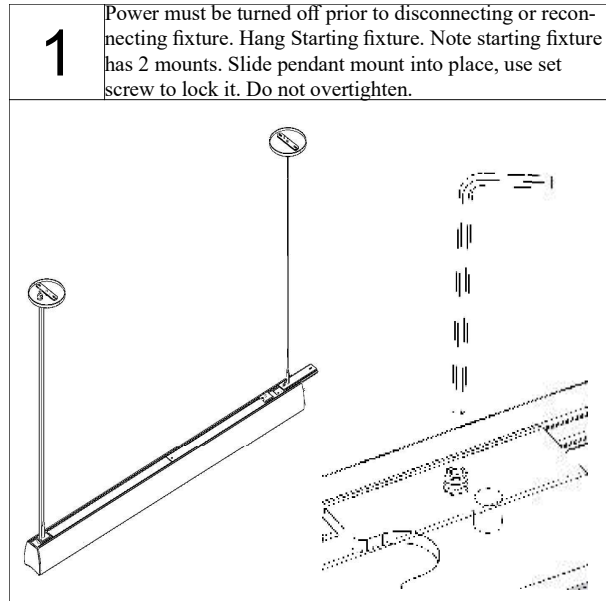

# INSTALLATION INSTRUCTIONS

## Continuous Pendant Mount Cont. (ACxxx)

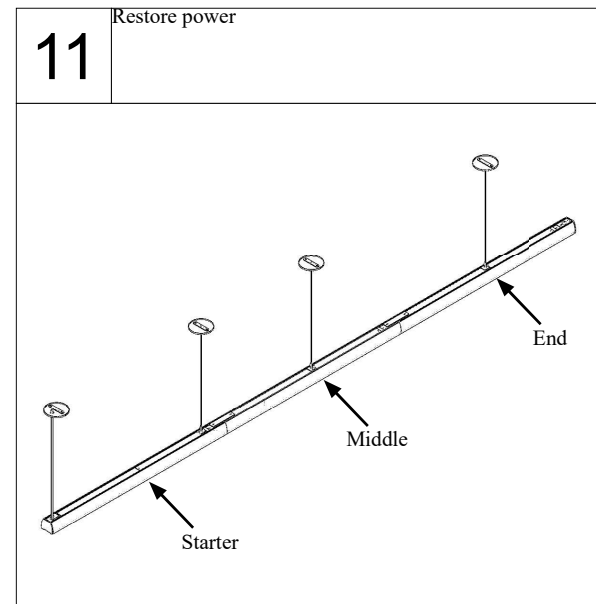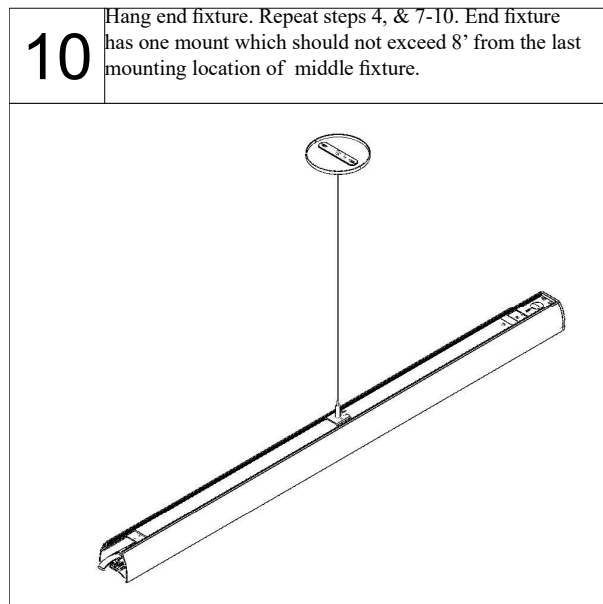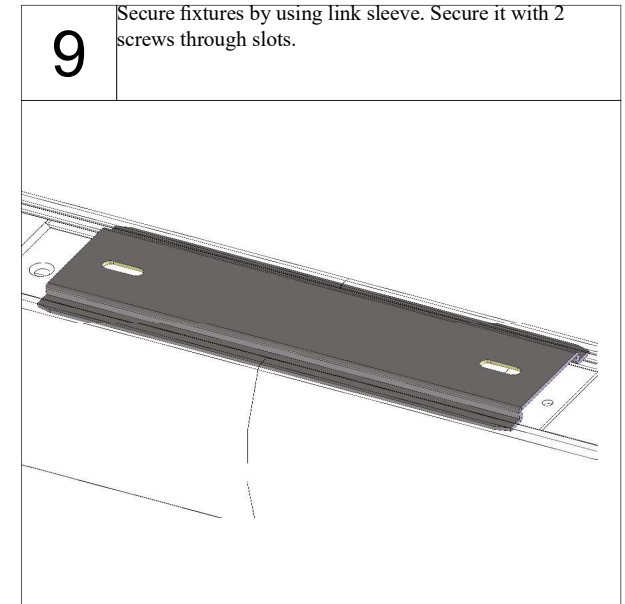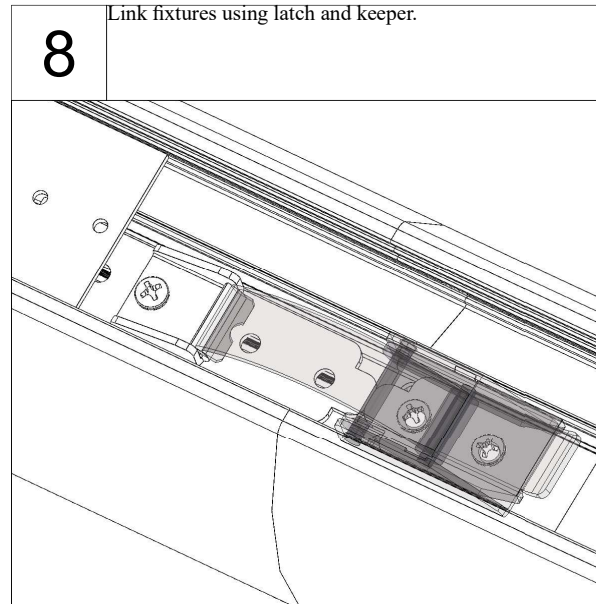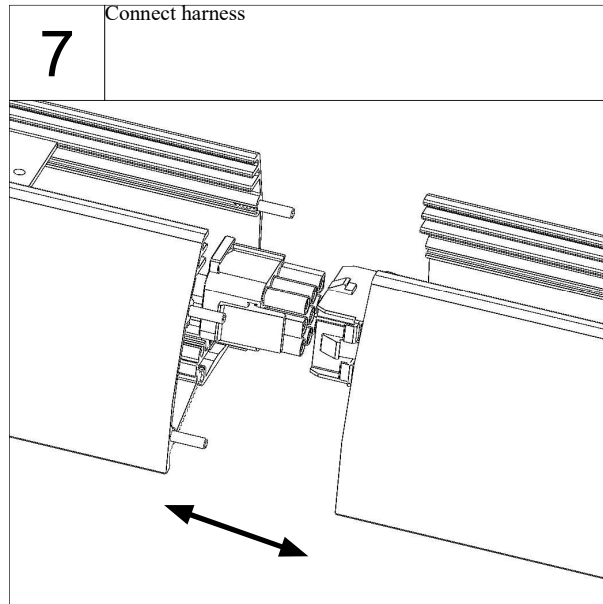


# INSTALLATION INSTRUCTIONS

## Individual Wall Mount (WM)




**1** Power must be turned off prior to disconnecting or reconnecting fixture.

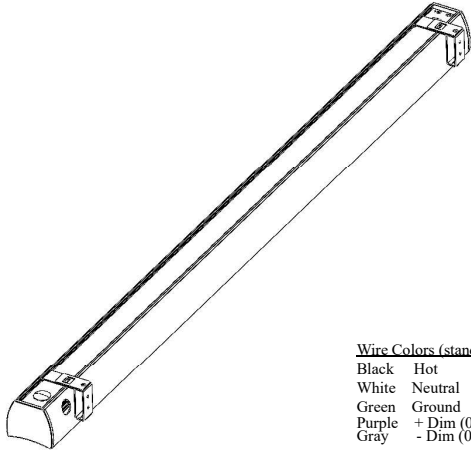


Wire Colors (standard)  
 Black Hot  
 White Neutral  
 Green Ground  
 Purple + Dim (0-10v)  
 Gray - Dim (0-10v)


**2** Remove top screw to release wall mount bracket.

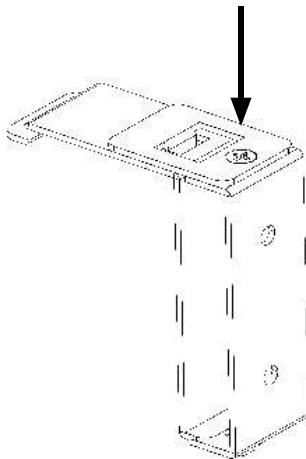

**3** Locate mounting points according to supplied client drawing. Install brackets to wall.

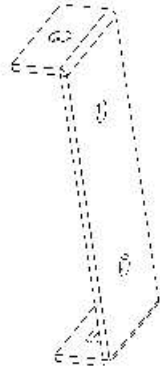


**4** Connect fixture wiring to line power.

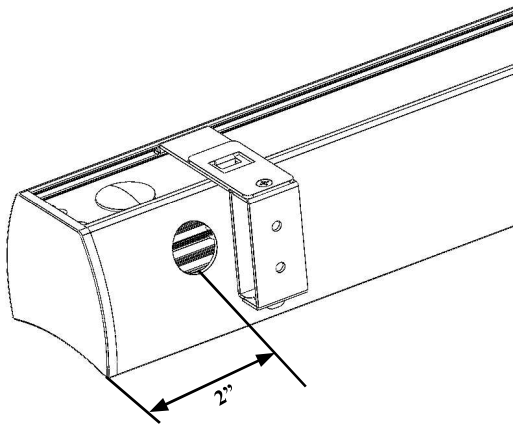

2"

**5**

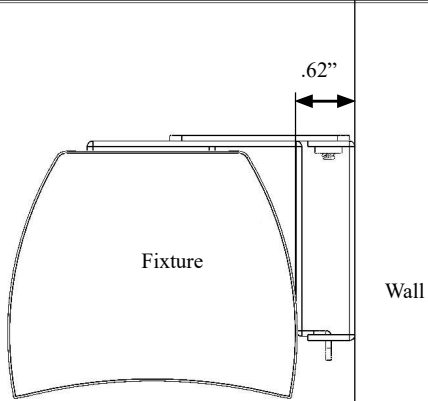


Fixture

Wall

.62"

**6** Restore power

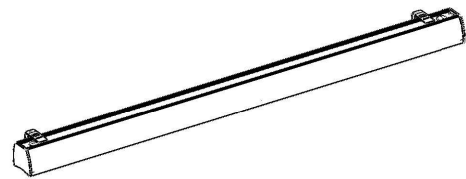


# INSTALLATION INSTRUCTIONS

## Continuous Wall Mount (WM)




**1** Power must be turned off prior to disconnecting or reconnecting fixture.

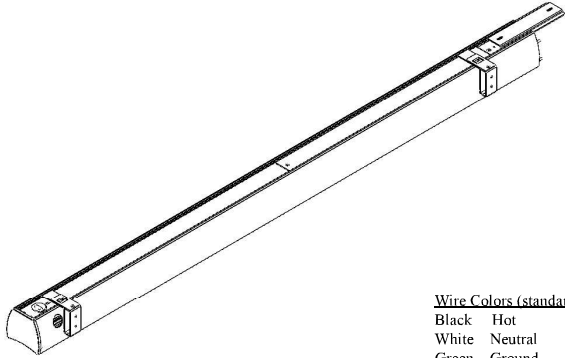


Wire Colors (standard)  
 Black Hot  
 White Neutral  
 Green Ground  
 Purple + Dim (0-10v)  
 Gray - Dim (0-10v)


**2** Remove top screw to release wall mount bracket.

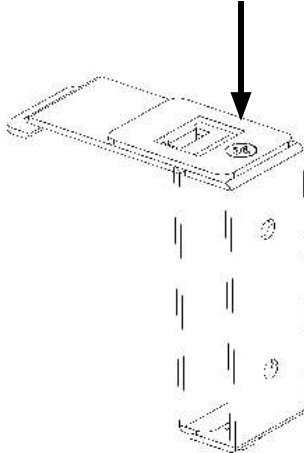

**3** Locate mounting points according to supplied client drawing. Install brackets to wall.




**4** Connect fixture wiring to line power.

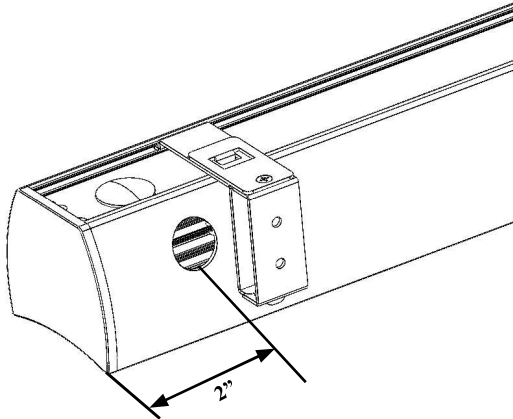

2"

**5**

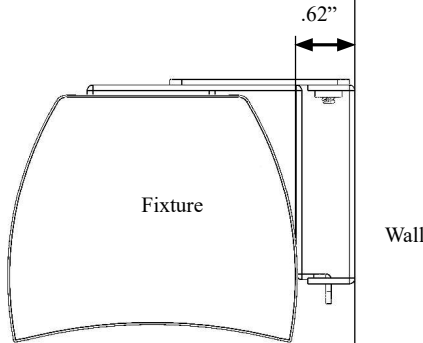


.62"

Fixture

Wall






**6** Hang middle fixture. Repeat steps 2-3.

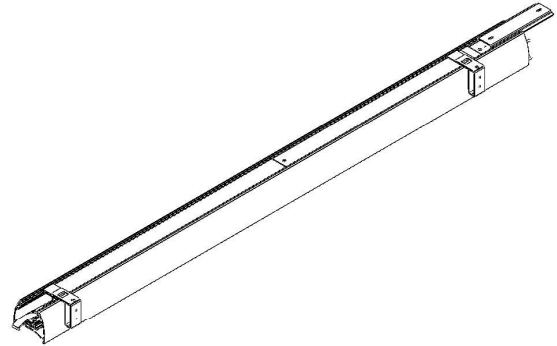









# INSTALLATION INSTRUCTIONS

## Continuous Wall Mount Cont. (WM)

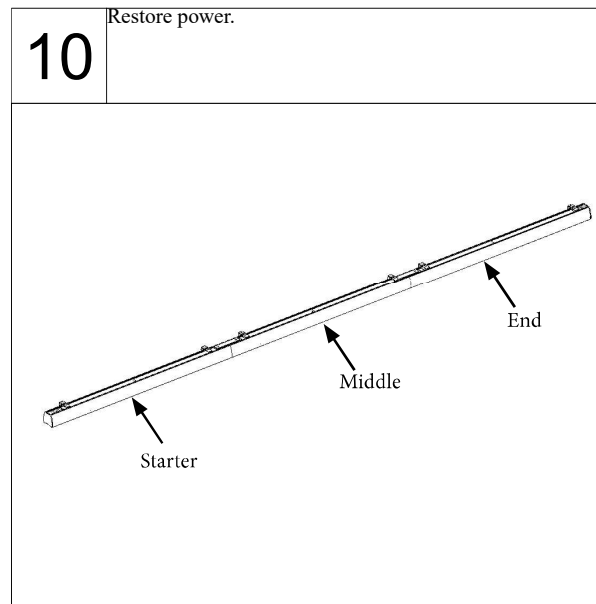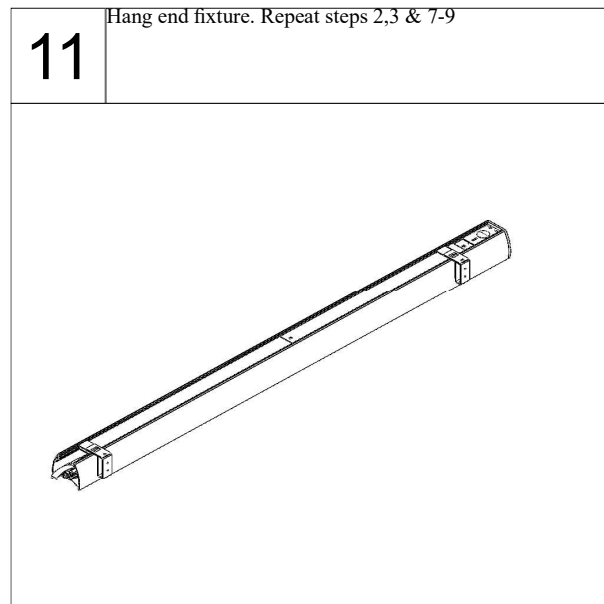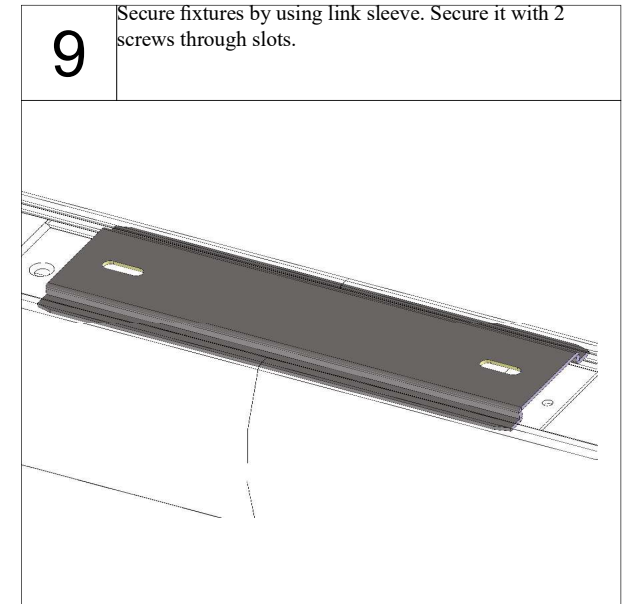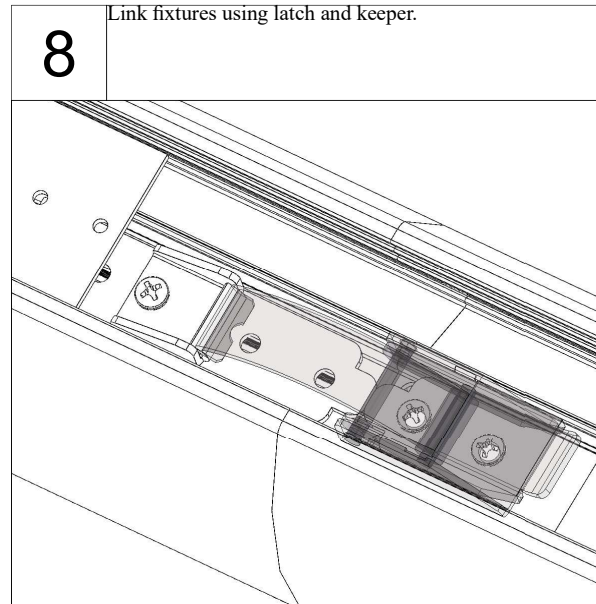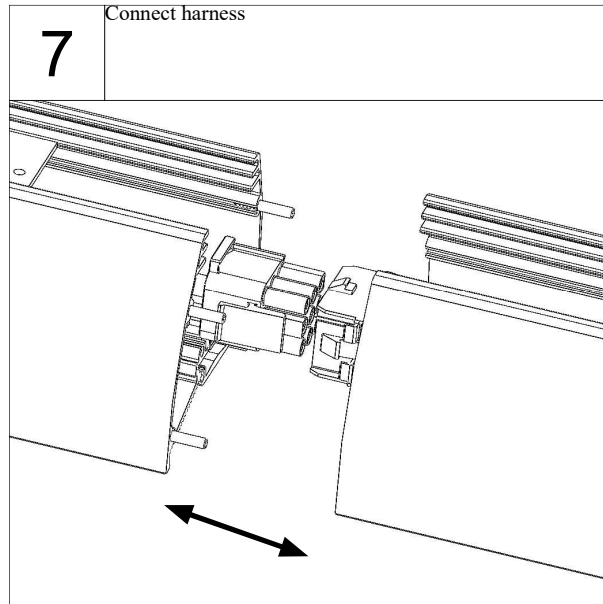

# INSTALLATION INSTRUCTIONS







## Individual Stem With Canopy (STEMxxx)

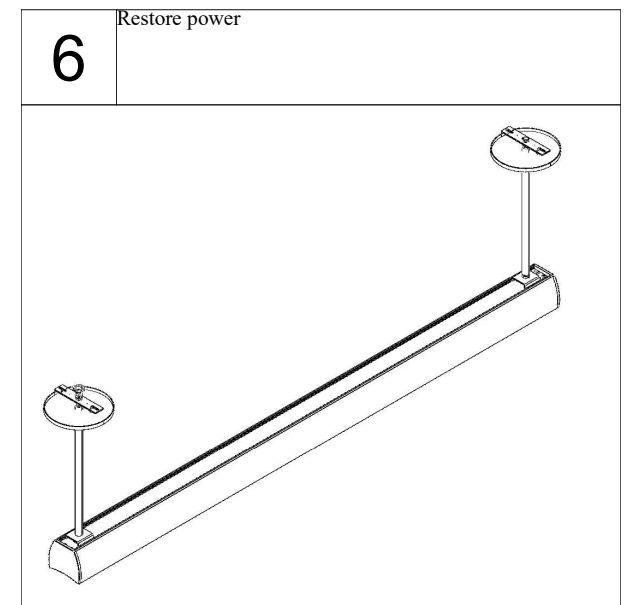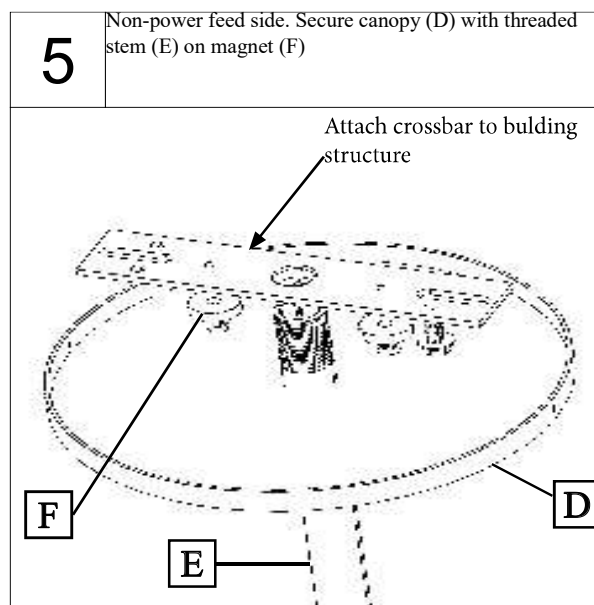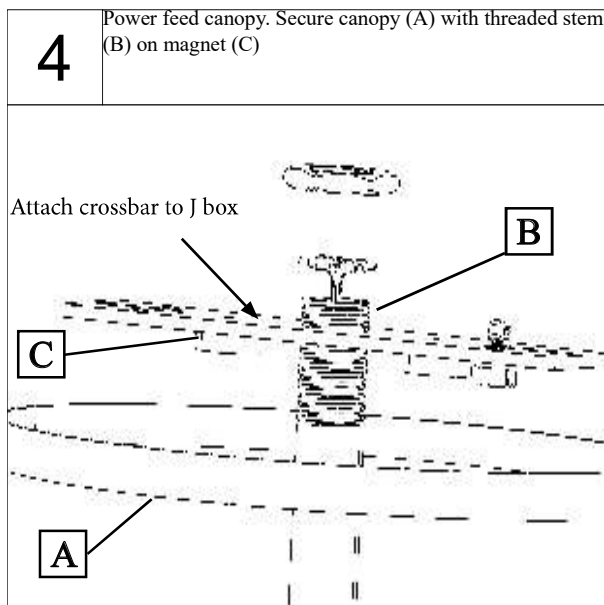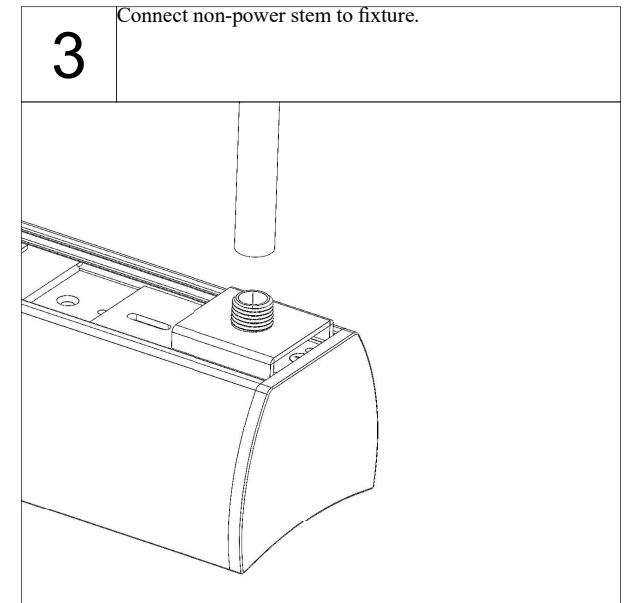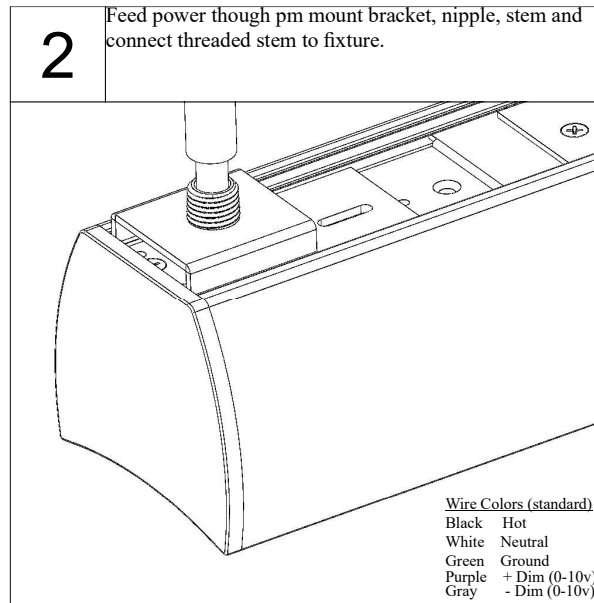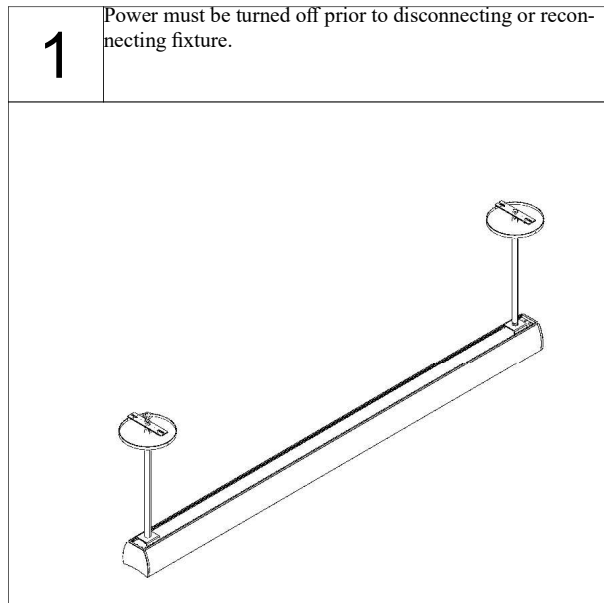








# INSTALLATION INSTRUCTIONS

## Continuous Stem With Canopy (STEMxxx)

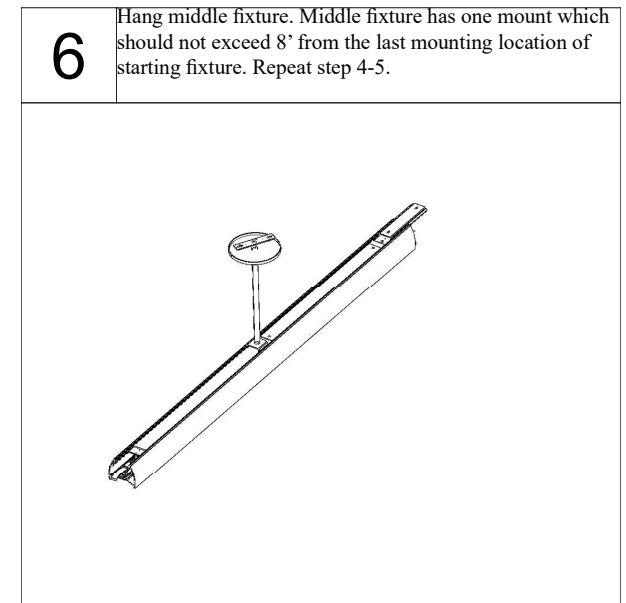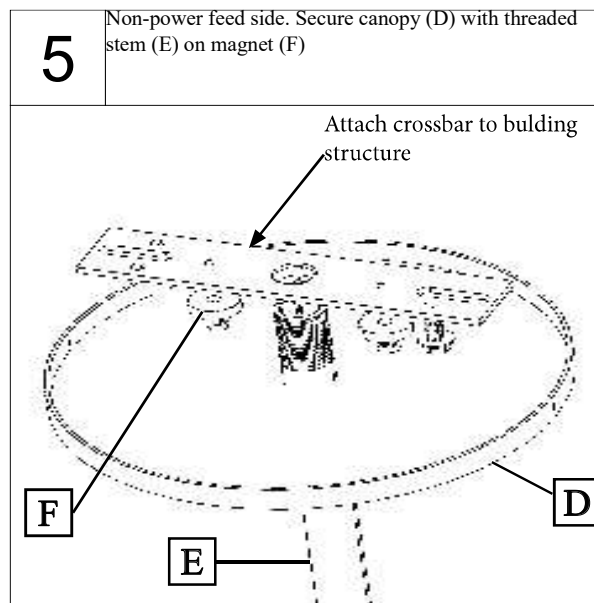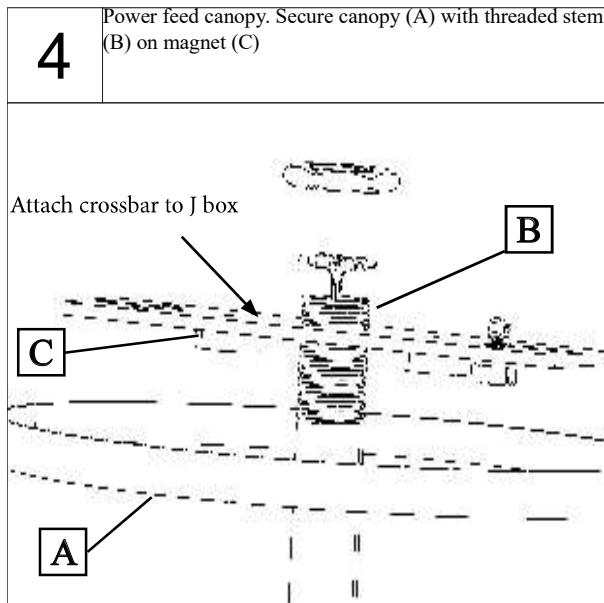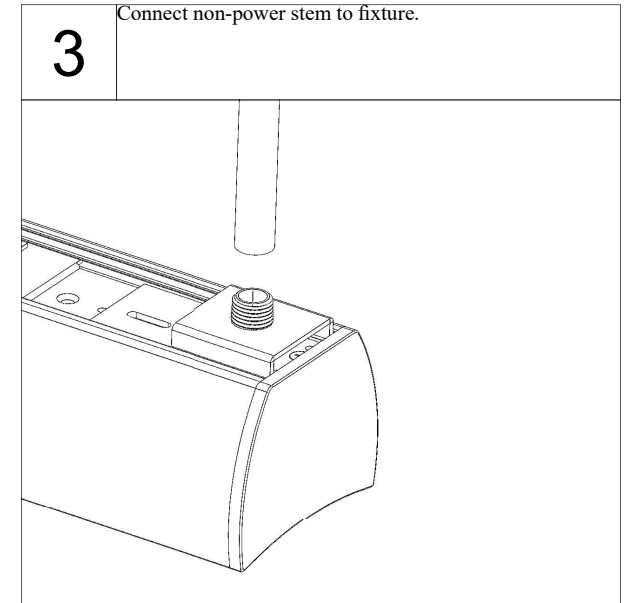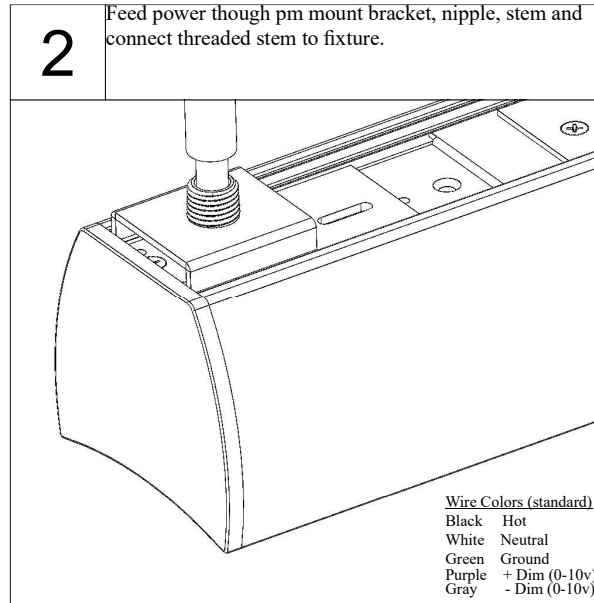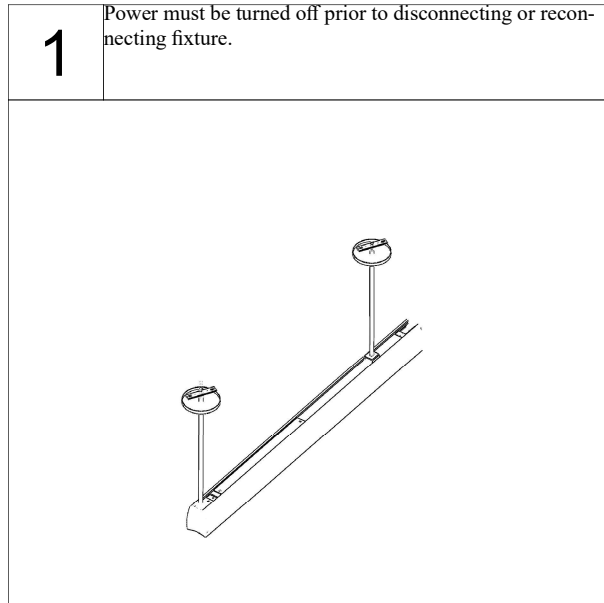





# INSTALLATION INSTRUCTIONS

## Continuous Stem With Canopy Cont. (STEMxxx)

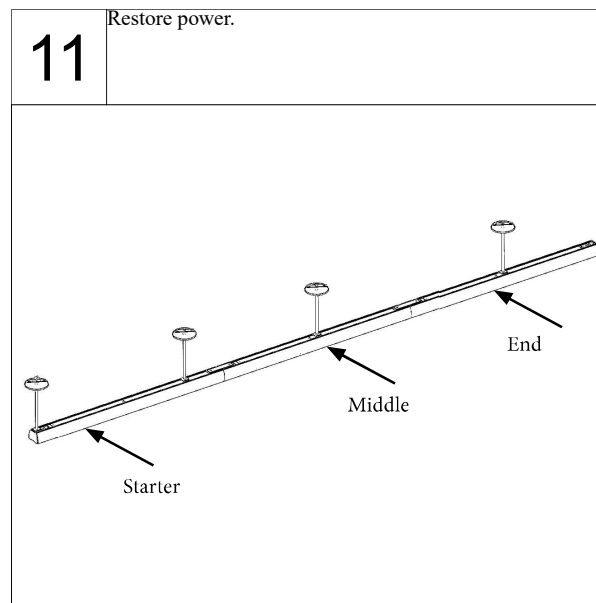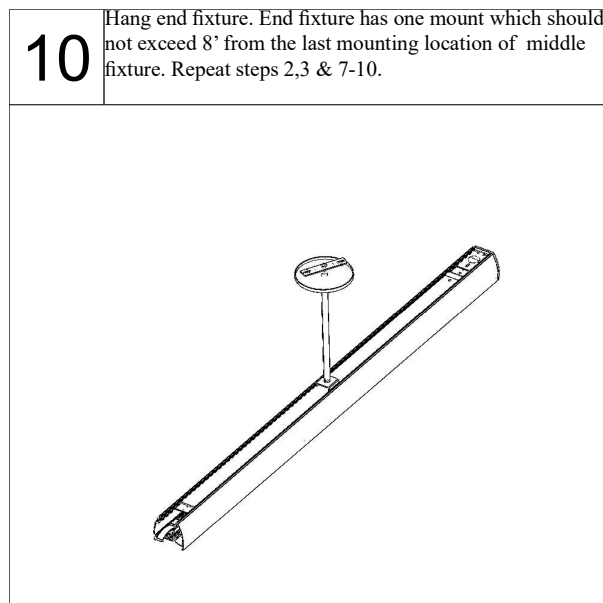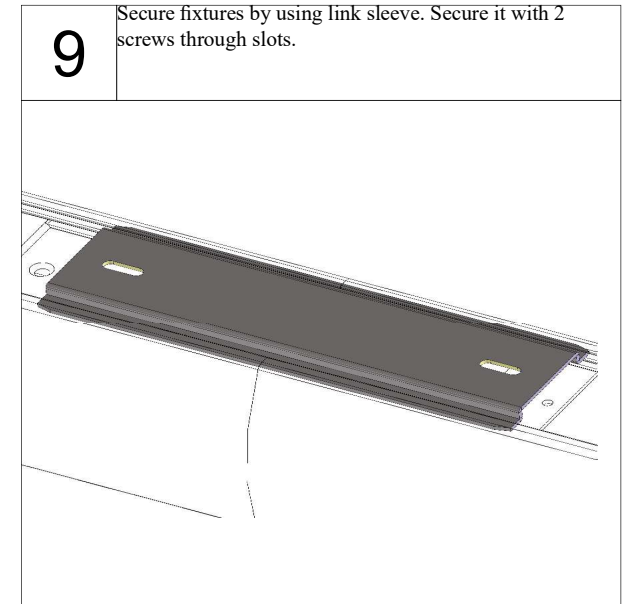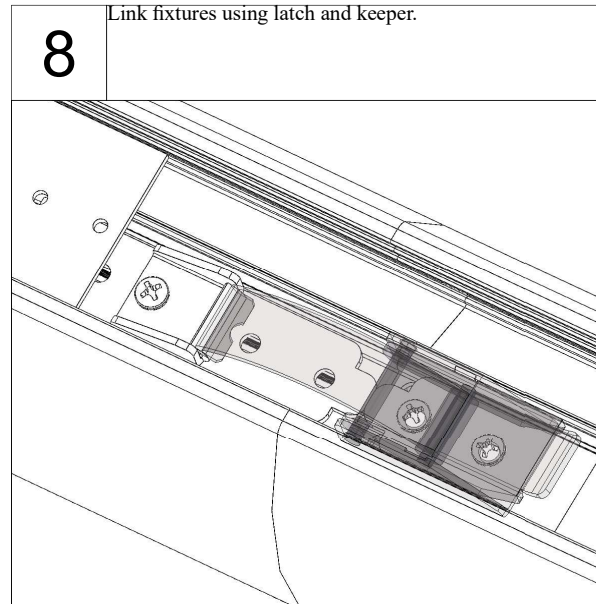
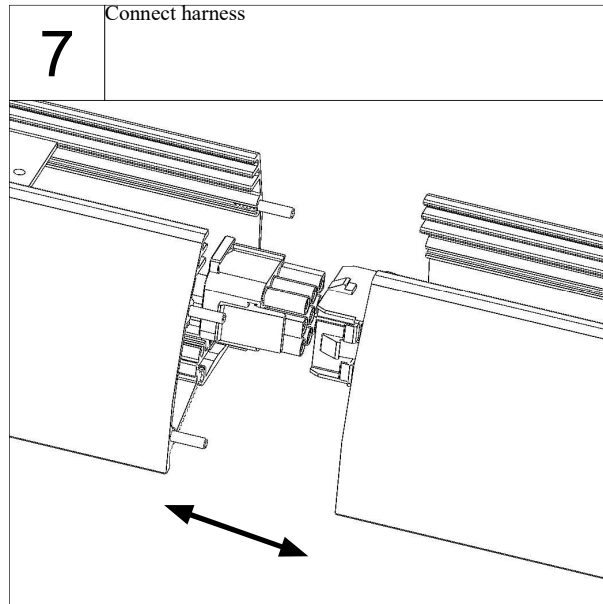


# INSTALLATION INSTRUCTIONS

## Individual Surface Mount (SM)

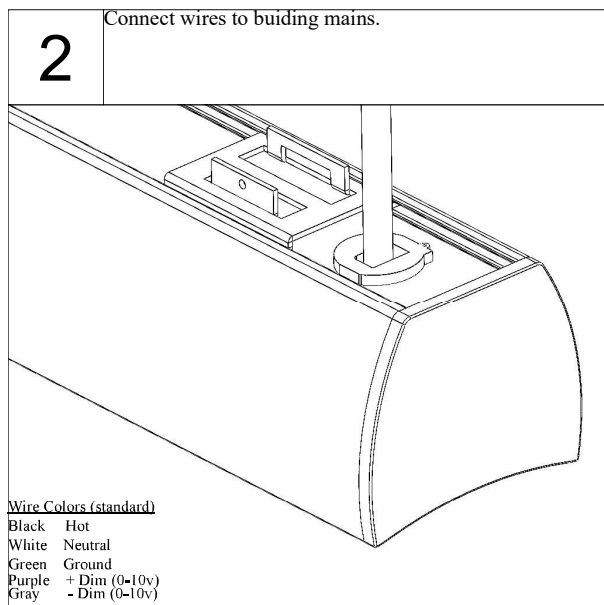
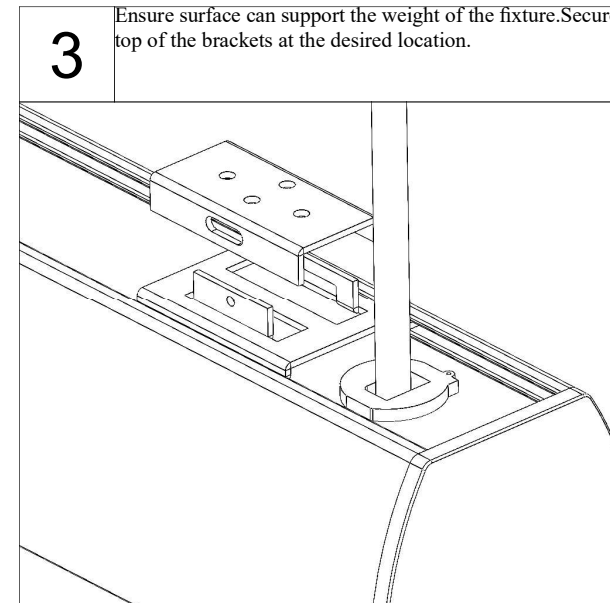
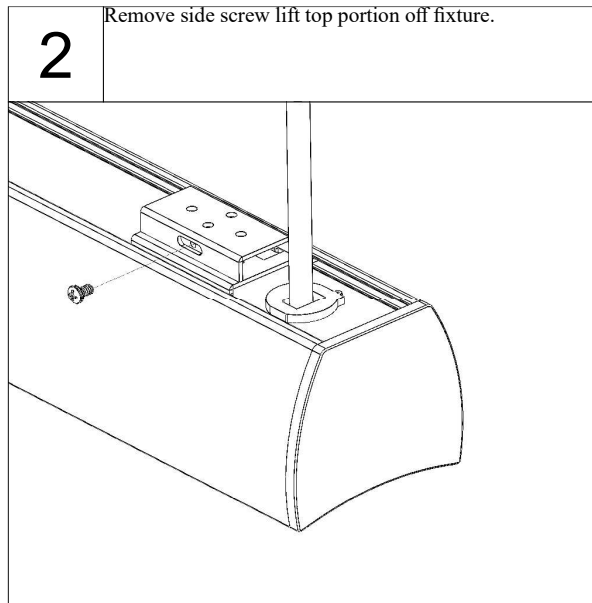
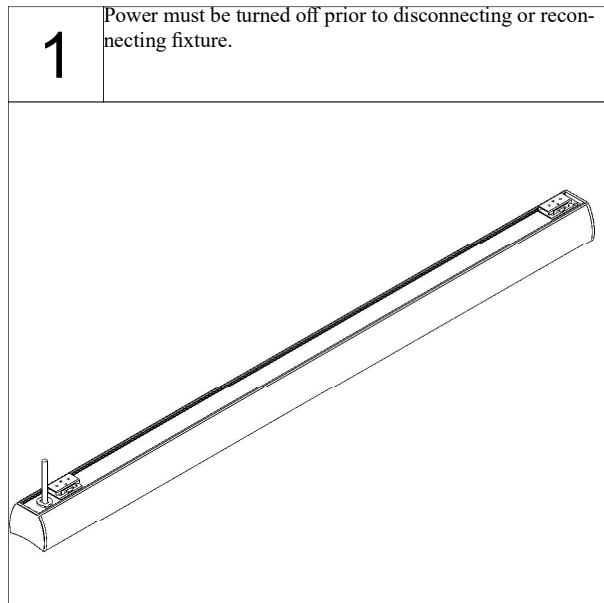


Wire Colors (standard)  
Black Hot  
White Neutral  
Green Ground  
Purple + Dim (0-10v)  
Gray - Dim (0-10v)

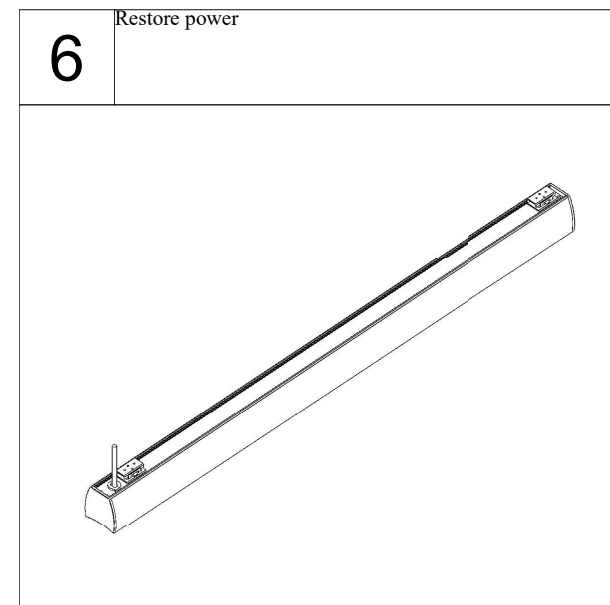
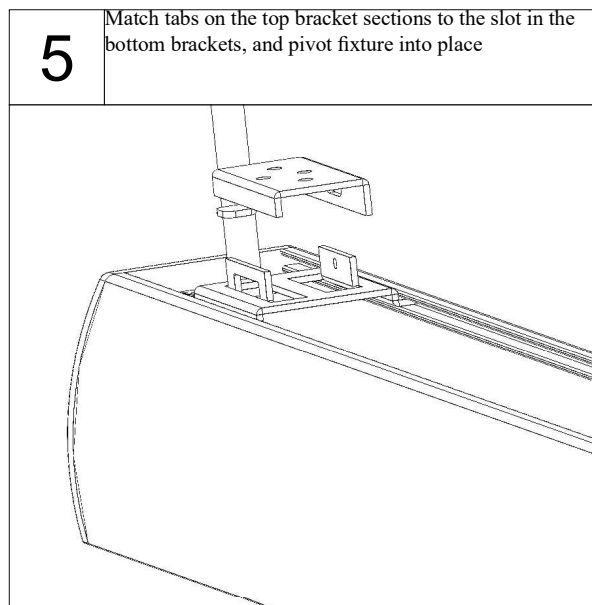


# INSTALLATION INSTRUCTIONS

## Continuous Surface Mount (SM)

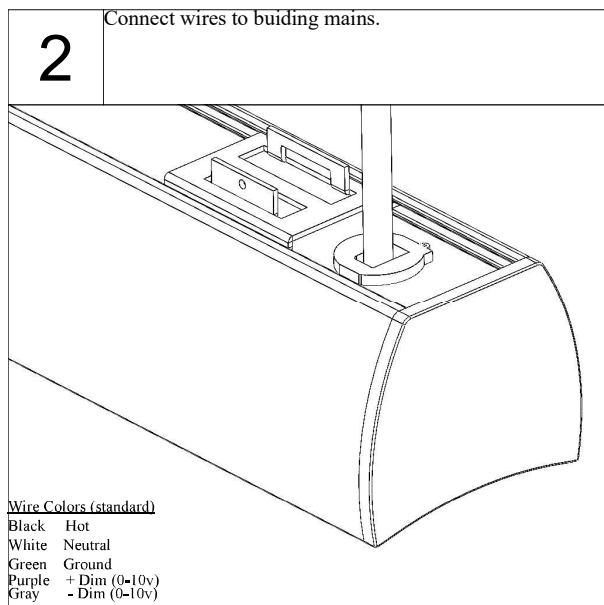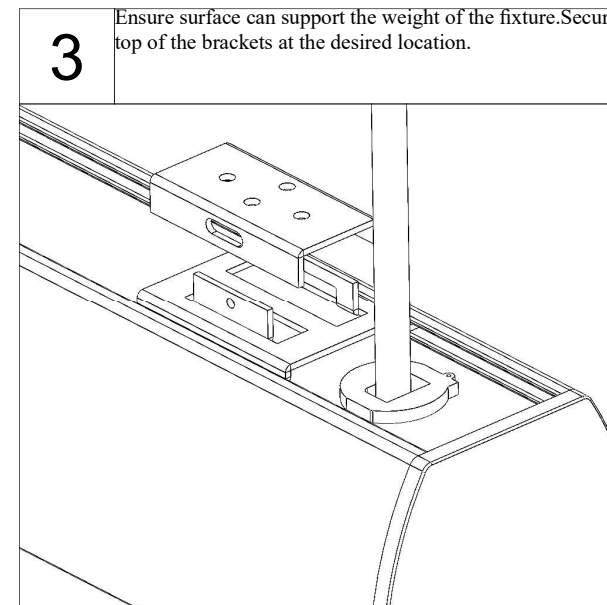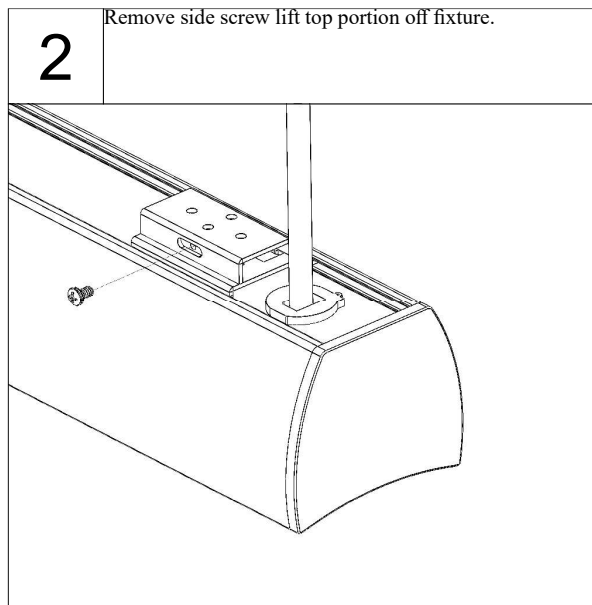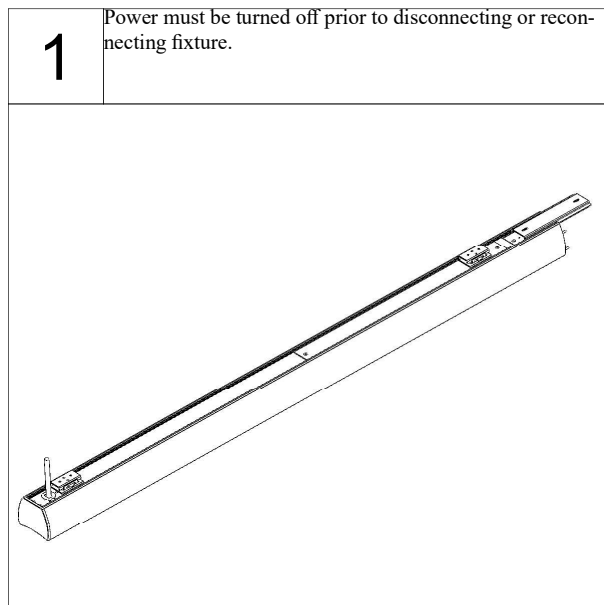

Wire Colors (standard)  
Black Hot  
White Neutral  
Green Ground  
Purple + Dim (0-10v)  
Gray - Dim (0-10v)

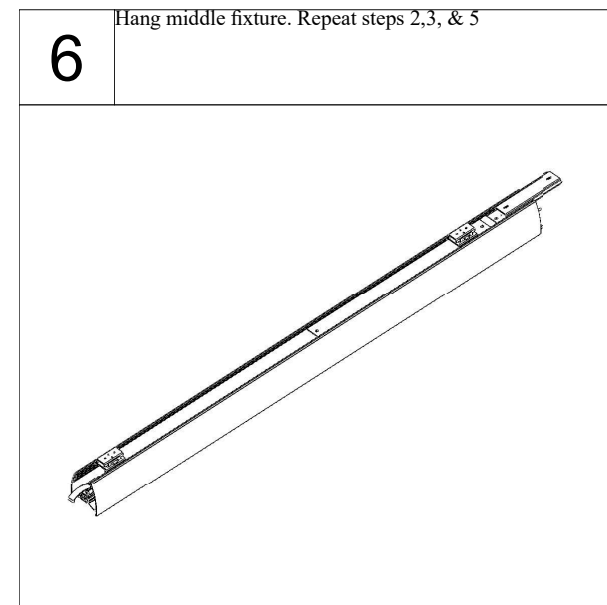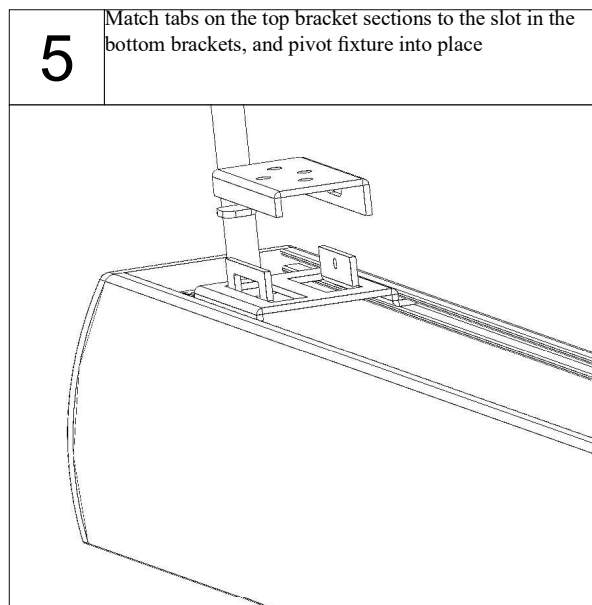

# INSTALLATION INSTRUCTIONS

## Continuous Surface Mount (SM)

