



Type:	
Project:	
REP/Agent:	
Order #:	

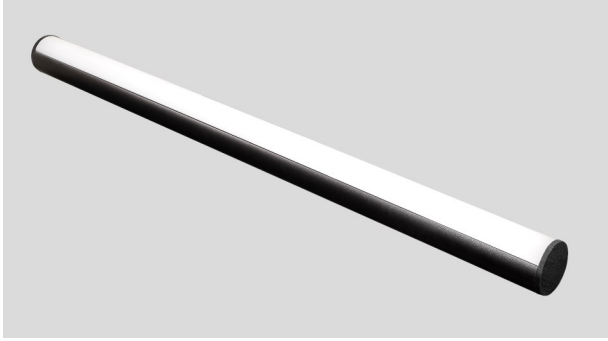

DIMENSIONS



FEATURES

- Single piece aluminum extrusion housing
- Individual 2', 4', 6' and 8' units, or continuous rows
- Linear runs with proprietary joiner design
- Efficacy up to 140 lm/W
- Soft diffuse direct lighting
- Textured powder coat finishes available in white, black and silver
- Premium finishes also available
- Approved for dry and damp locations
- 0-10v dimming is standard
- Dim to 1% of output current is standard
- 90 CRI (R9 50 min) available
- CA Title 24 / JA8 installation compatible



ORDERING LOGIC

OPTI	-	SD	-	-	-
SERIES	-	DISTRIBUTION	-	CCT	-
OPTI	-	SD= Satin Ice Diffuse	-	30K= 3000K 35K= 3500K 40K= 4000K 50K= 5000K TW= Tunable White ¹ (2700-6500K)	-
xx= Run Length Sxx= Symmetric Run Length	-		-		-
350= 350 LPF 500= 500 LPF 750= 750 LPF 1000= 1000 LPF XXX= Custom LPF	-		-		-
80= 80 90= 90 (R9 50 min)	-		-		-
FINISH	-	MOUNTING	-	VOLTAGE	-
STANDARD	-	CABLES WITH CANOPY KITS	-	U= 120-277 C= 347	-
PW= Powder Coat White	-	ACW05= White Cord 5'	-		-
PB= Powder Coat Black	-	ACW10= White Cord 10'	-		-
PS= Powder Coat Silver	-	ACB05= Black Cord 5'	-		-
	-	ACB10= Black Cord 10'	-		-
PREMIUM	-	STEMS WITH CANOPY KITS	-		-
RALxxxx= Powder Coat	-	STEMWxx= Stem White, xx"	-		-
RAL xxxx	-	STEMBxx= Stem Black, xx"	-		-
PSFx= Prem Stock Finish	-		-		-
CUSTOM	-		-		-
PO= Powder Other	-		-		-
ELECTRICAL	-	OPTIONS	-		-
1C= Single Circuit	-	SPECIALTY DRIVERS (Standard driver is 0-10V, dim to 1% output current)	-		-
MC= Multiple Circuits	-	DT1= eldoLED EcoDrive Dim to 1% (0-10V)	-		-
(multiple switch legs across run length)	-	DTZ= eldoLED SoloDrive Dim to 0.1% (0-10V)	-		-
EC= Emergency Circuit	-	PSRD= Philips Sensor Ready (DALI) Driver	-		-
(separate power drops for EC fixtures)	-	LDE1= Lutron Hi-Lume EcoSystem LED driver with Soft-on, Fade-to-Black	-		-
GTD= Generator Transfer Device	-	TW-A= Tunable White, 0-10v ²	-		-
	-	TW-EL= eldoLED DUALdrive Tunable White (DALI) ²	-		-
	-	LD2=Lutron DALI 2 Digital Tunable White driver with 1% dimming ²	-		-
	-	BATTERIES ("#" indicates quantity)	-		-
	-	#EMB6= 6W EM Battery (Iota/Bodine)	-		-
	-	#EMB10= 10W EM Battery (Iota/Bodine)	-		-
	-	SENSORS	-		-
	-	AWN-R= Lutron Athena Wireless Node (RF only) ³ - White Finish	-		-
	-	AWN-B= Lutron Athena Wireless Node (RF only) ³ - Black Finish	-		-

EXAMPLE: OPTI-40-750-SD-35K-80-PW-ACW10-U-1C-1EMB10

¹ Tunable White Driver must be specified in options

² 50 Watt Max. Dual driver required for higher fixture wattage

³ DALI driver for static & DALI-2 Type 8 for tunable.