


BEAM DIRECT/INDIRECT



DIMENSIONS

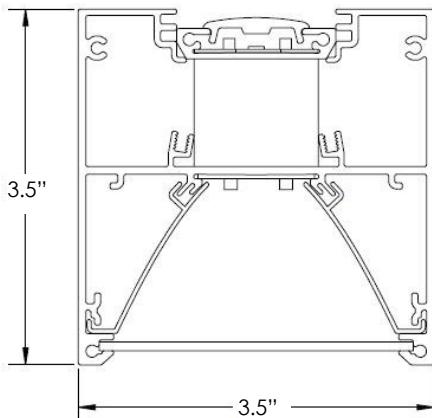

ORDERING LOGIC

WS-BEAMDI						
SERIES	LENGTH	DIRECT LUMENS PER FOOT	INDIRECT LUMENS PER FOOT	DIRECT DISTRIBUTION	INDIRECT DISTRIBUTION	CCT

WS-BEAMDI	xx= Run Length	350= 350 LPF 500= 500 LPF 750= 750 LPF 1000= 1000 LPF XXX= Custom LPF	350= 350 LPF 500= 500 LPF 750= 750 LPF 1000= 1000 LPF XXX= Custom LPF	SD= SatinIce Diffuse WD= Wide Diffuse	CL=Clear Lens BW=Batwing	30K= 3000K 35K= 3500K 40K= 4000K
-----------	----------------	---	---	--	-----------------------------	--

CRI	FINISH	MOUNTING	VOLTAGE	ELECTRICAL	OPTIONS
-----	--------	----------	---------	------------	---------

80= 80	STANDARD PW= Powder Coat White PB= Powder Coat Black	CABLES WITH CANOPY KITS ACW05= White Cord 5' ACW10= White Cord 10' ACB05= Black Cord 5' ACB10= Black Cord 10'	U= 120-277	1C= Single Circuit	BATTERIES (# indicates quantity) #EMB6= 6W EM Battery (Iota/Bodine) #EMB10= 10W EM Battery (Iota/Bodine) Continuous Runs with Batteries must have Ordering Guide Worksheet (page 3) submitted with order.
--------	---	--	------------	--------------------	--

CABLES WITH LOOPS

ALW10= White Cord 10'
ALB10= Black Cord 10'

Type:	
Project:	
REP/Agent:	
Order #:	



5 DAY TURNAROUND

FEATURES

- ★ Shipment up to 500' in 5 working days
- ★ Continuous lensing standard- runs up to 200'
- ★ Extruded aluminum single piece housing
- ★ Individual or continuous rows consisting of 2', 4', 6' and 8' fixtures
- ★ Linear runs with proprietary joiner design
- ★ Direct & Indirect light levels can be set to any combination at the factory
- ★ Efficacy up to 138 lm/W
- ★ Soft diffuse direct lighting
- ★ Textured powder coat finishes available in white and black
- ★ Approved for dry and damp locations
- ★ 0-10v dimming is standard
- ★ Dim to 1% of output current is standard



Declare.

LUMEN PACKAGES

Based on 3500K CCT. Other CCT available.

MODEL	LUMENS	INPUT WATTS	Lm/W
WS-BEAMDI-4-750-500-WD-BW-35K-80	5,000	41	121
WS-BEAMDI-8-750-500-WD-BW-35K-80	10,000	78	128




EXAMPLE: WS-BEAMDI-40-750-500-WD-BW-35K-80-PW-ACW10-U-1C

BEAM DIRECT/INDIRECT




Type:	
Project:	
REP/Agent:	
Order #:	

MOUNTING OPTIONS

ACxxx (Aircraft Cable with Canopy) - Drywall, Solid, Tile (On-Grid), Tile (Off-Grid)

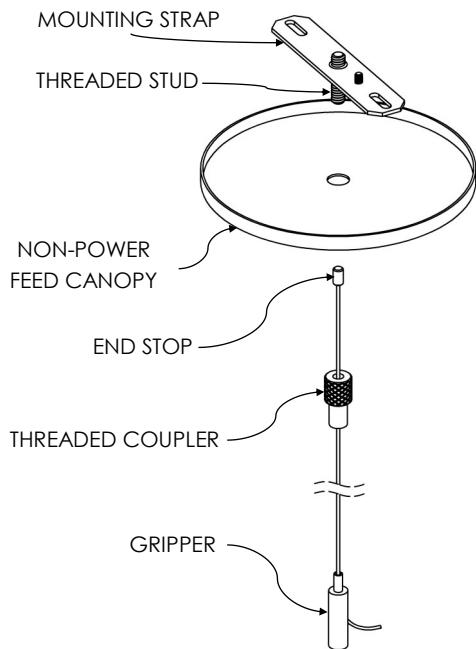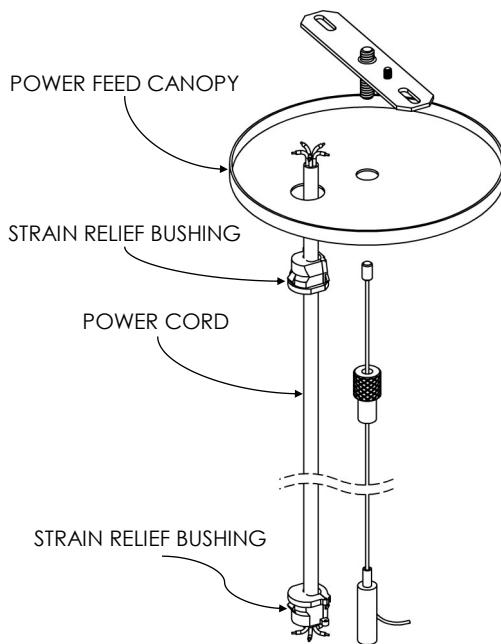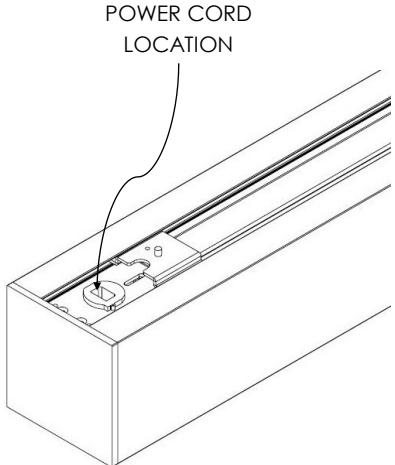

ALxxx (Aircraft Cable with Loops)

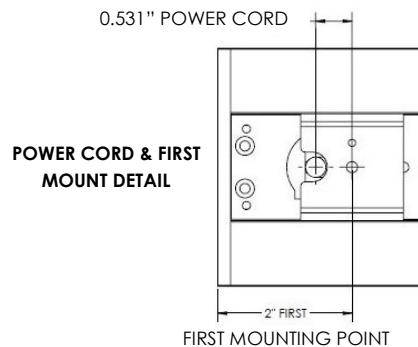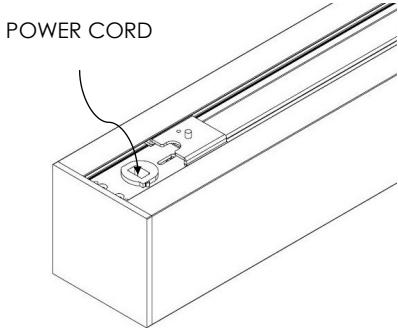

SPECIFICATIONS

Housing

Nominal 3.5" x 3.5" x .075" thick housing of continuous extruded 6063 T5 aluminum.

Color

Colors for the housing are available in a powder coated white and black.

Luminaire Length

2', 4', 6' & 8' lengths are available for a single stand-alone section. Using internal joiners, these sections can be joined to form longer runs.

End Caps

Injection molded flat end caps are mechanically attached with no exposed fasteners to enhance architectural aesthetic and prevent light leak.

Source

Lumen packages are available in three color temperature options (3000K, 3500K and 4000K) - all within 3 MacAdam ellipses.

Certification

Intertek cETLus Listed. RoHS (Restriction of Hazardous Substances) and Buy American Act compliant.

Lensing

0.080" thick impact resistant acrylic lensing.

Packaging

Sustainably manufactured outside cardboard box and biodegradable, protective poly-foam luminaire inserts.

Environment

Suitable for dry and damp locations.

Operating temp.: -40°C to +50°C
-40°F to +122°F

Dimming Driver (Integral Driver)

Constant current programmable LED driver. UL listed, class P, 0-10V, dim to 1% of output current. 2.5KV ring wave surge protection and >.90 power factor.

Warranty

http://www.starteklightingamerica.com/images/pdf/warranty/Beam_Series_Warranty.pdf

Type:	
Project:	
REP/Agent:	
Order #:	

Ordering Guide Worksheet

Job Name: _____

PO#: _____ Quote#: _____

How to use this guide

Fill out the worksheet to specify your requirements for battery and sensor locations.

Refer to the run chart for standard run configurations, consult factory for custom configurations.

Submit the worksheet along with your order.

Ordering Logic Battery

Symbols

Note: Standard battery operates entire fixture segment.

Consult factory for other options.

Example Ordering Code: WS-BEAMDI-40-750-500-WD-BW-35K-80-PW-ACW10-U-1C-2EMB10

RUN CHART

Length	Housing Configurations Section Length
9	$5 + 4$
10	$6 + 4$
11	$7 + 4$
12	$8 + 4$
13	$8 + 5$
14	$8 + 6$
15	$8 + 7$
16	$8 + 8$
17	$8 + 5 + 4$
18	$8 + 6 + 4$
19	$8 + 7 + 4$
20	$8 + 8 + 4$

Length	Housing Configurations Section Length
21	$8 + 8 + 5$
22	$8 + 8 + 6$
23	$8 + 8 + 7$
24	$8 + 8 + 8$
25	$8 + 8 + 5 + 4$
26	$8 + 8 + 6 + 4$
27	$8 + 8 + 7 + 4$
28	$8 + 8 + 8 + 4$
29	$8 + 8 + 8 + 5$
30	$8 + 8 + 8 + 6$
31	$8 + 8 + 8 + 7$
32	$8 + 8 + 8 + 8$

Length	Housing Configurations
	Section Length
33	$8 + 8 + 8 + 5 + 4$
34	$8 + 8 + 8 + 6 + 4$
35	$8 + 8 + 8 + 7 + 4$
36	$8 + 8 + 8 + 8 + 4$
37	$8 + 8 + 8 + 8 + 5$
38	$8 + 8 + 8 + 8 + 6$
39	$8 + 8 + 8 + 8 + 7$
40	$8 + 8 + 8 + 8 + 8$
41	$8 + 8 + 8 + 8 + 5 + 4$
42	$8 + 8 + 8 + 8 + 6 + 4$
43	$8 + 8 + 8 + 8 + 7 + 4$
44	$8 + 8 + 8 + 8 + 8 + 4$

Length	Housing Configurations
	Section Length
45	$8 + 8 + 8 + 8 + 8 + 5$
46	$8 + 8 + 8 + 8 + 8 + 6$
47	$8 + 8 + 8 + 8 + 8 + 7$
48	$8 + 8 + 8 + 8 + 8 + 8$

Standard run configurations,
consult factory for
custom configurations.

Ordering guide requires standard run configurations.