


NOVA PRO DIRECT



DIMENSIONS

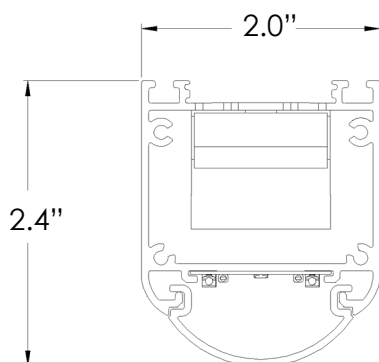

ORDERING LOGIC

WS-NOVPD						
SERIES	LENGTH	LUMENS PER FOOT	DISTRIBUTION	CCT	CRI	FINISH
WS-NOVPD	xx= Run Length	350= 350 LPF 500= 500 LPF 750= 750 LPF 1000= 1000 LPF XXX= Custom LPF	SD= SatinIce Diffuse	30K= 3000K 35K= 3500K 40K= 4000K	80= 80	STANDARD PW= Powder Coat White PB= Powder Coat Black

MOUNTING	VOLTAGE	ELECTRICAL	OPTIONS
----------	---------	------------	---------

CABLES WITH CANOPY KITS

ACW05= White Cord 5'
ACW10= White Cord 10'
ACB05= Black Cord 5'
ACB10= Black Cord 10'

CABLES WITH LOOPS

ALW10= White Cord 10'
ALB10= Black Cord 10'

SURFACE MOUNTS

SM(T)= Wires Top Exit
SM(E)= Wires End Exit

EXAMPLE: WS-NOVPD-40-750-SD-35K-80-PW-ACW10-U-1C-1EMB10

Type:	
Project:	
REP/Agent:	
Order #:	



5 DAY TURNAROUND

FEATURES

- ★ Shipment up to 500' in 5 working days
- ★ Efficacy up to 145 lm/W
- ★ Soft diffuse direct lighting
- ★ Individual or continuous rows consisting of 2', 4', 6', and 8' fixtures
- ★ Textured powder coat finishes available in white and black
- ★ Approved for dry and damp locations
- ★ 0-10v dimming is standard
- ★ Dim to 1% of output current is standard
- ★ 90 CRI (R9 50min) available
- ★ CA Title 24 / JA8 installation compatible



LUMEN PACKAGES


Based on 3500K CCT. Other CCT available.

MODEL	LUMENS	INPUT WATTS	Lm/W
WS-NOVPD-4-750-SD-35K-80	3,000	23	131
WS-NOVPD-8-750-SD-35K-80	6,000	43	138

NOVA PRO DIRECT


MOUNTING OPTIONS

ACxxx (Aircraft Cable with Canopy) - Drywall, Solid, Tile (On-Grid), Tile (Off-Grid)

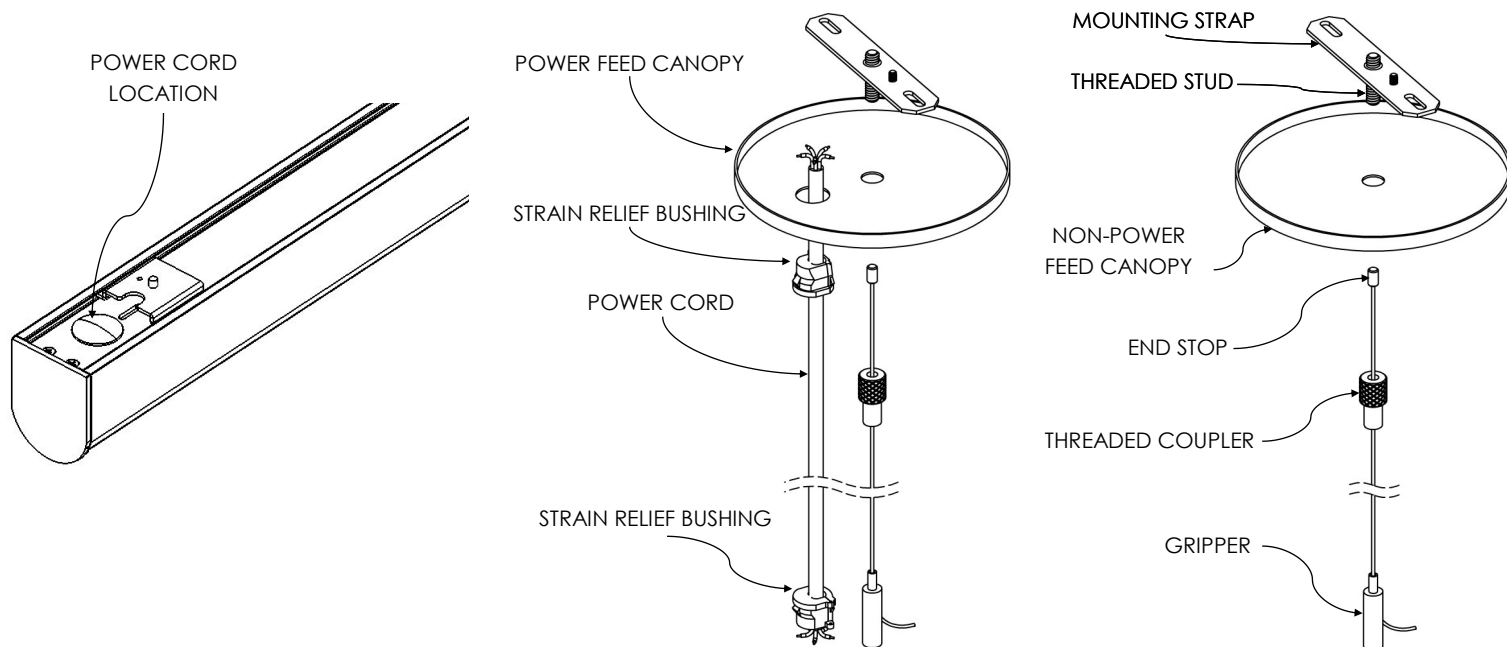

ALxxx (Aircraft Cable with Loops)

SM (Surface Mount)

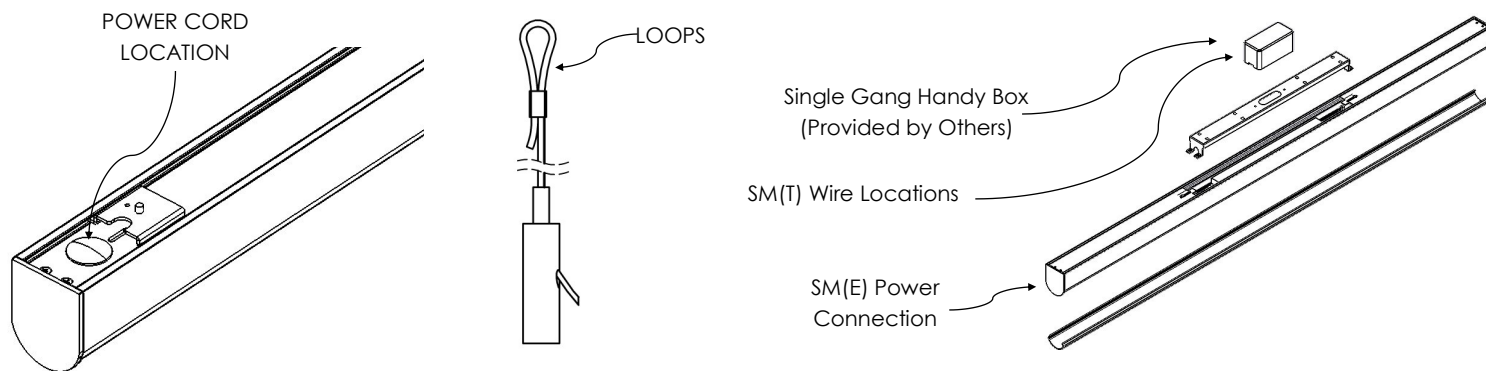

SPECIFICATIONS

Housing

Nominal 2" x 2 1/2" housing of continuous extruded 6063 T5 aluminum.

Color

Colors for the housing are available in a powder coated white and black.

Luminaire Length

2', 4', 6', or 8' lengths are available for a single stand-alone section. Using internal joiners, these sections can be joined to form longer rows.

End Caps

Injection molded flat end caps are mechanically attached with no exposed fasteners to enhance architectural aesthetic and prevent light leak.

Source

Lumen packages are available in three color temperature options (3000K, 3500K and 4000K) - all within 3 MacAdam ellipses.

Certification

Intertek cETLus Listed. RoHS (Restriction of Hazardous Substances) and Buy American Act compliant.

Lensing

0.060" thick impact resistant acrylic lensing.

Packaging

Sustainably manufactured outside cardboard box and biodegradable, protective poly-foam luminaire inserts.

Environment

Suitable for dry and damp locations.
Operating temp.: -40°C to +50°C
-40°F to +122°F

Dimming Driver (Integral Driver)

Constant current programmable LED driver. UL listed, class P, 0-10V, dim to 1% of output current. 2.5KV ring wave surge protection and >.90 power factor.

Warranty

http://www.starteklightingamerica.com/images/pdf/warranty/Nova_2_Warranty.pdf

