



Type:	
Project:	
REP/Agent:	
Order #:	

## HALO DIRECT/INDIRECT

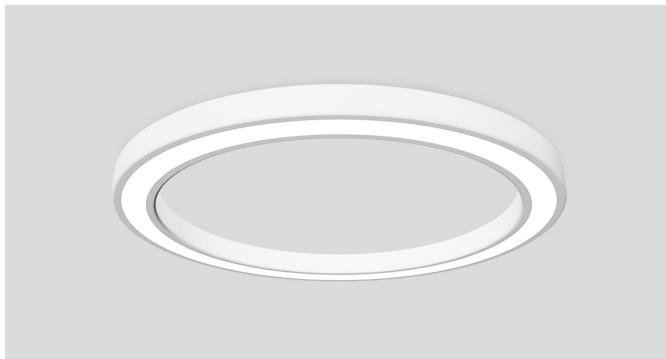


### DIMENSIONS

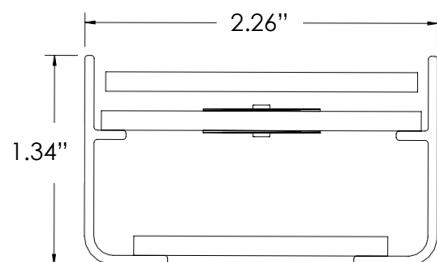

### FEATURES

- ★ Seamless lensing and aluminum housing
- ★ 2', 3', and 4' diameter fixtures available
- ★ Soft diffuse direct and indirect lighting
- ★ Powder coat finishes available in white, black, and silver
- ★ Custom colors available upon request\*
- ★ Approved for dry and damp locations
- ★ 0-10v dimming is standard
- ★ Dim to 1% of output current is standard
- ★ 120-277V for power enclosure
- ★ 90 CRI (R9 50 min) available
- ★ Class 2 input for luminaire
- ★ 90 CRI (R9 50 min) available
- ★ Three power choices of Hyperdrive remote power system

### DISTRIBUTION



SD= Satinice Diffuse

### LUMENS

Lumens can be specified within the ranges shown below

MODEL	MAX OUTPUT
HALODI-2	10,000lm
HALODI-3	13,000lm
HALODI-4	16,000lm





Type:	
Project:	
REP/Agent:	
Order #:	

## HALO DIRECT/INDIRECT

HALODI							
SERIES	LENGTH	DIRECT LUMENS	INDIRECT LUMENS	DIRECT DISTRIBUTION	INDIRECT DISTRIBUTION	CCT	CRI
HALODI	2= 2FT	XXXX= Lumens	XXXX= Lumens	SD= Satinice Diffuse	CL= Clear Lens	30K= 3000K	80= 80
	3= 3FT					35K= 3500K	90= 90 (R9 50 min)
	4= 4FT					40K= 4000K	
						50K= 5000K	

--	--

FINISH	MOUNTING
<u>STANDARD</u>	<u>POWERED CANOPY SINGLE POINT</u> (Driver included, 120-277V) PCSW= Powered Canopy Single Point White PCSB= Powered Canopy Single Point Black
PW= Powder Coat White PB= Powder Coat Black PS= Powder Coat Silver	
<u>PREMIUM</u>	<u>POWERED CANOPY MULTIPLE POINT</u> (Driver included) PCMW= Powered Canopy Multiple Point White PCMB= Powered Canopy Multiple Point Black
RALxxxx= Powder Coat RALxxxx	<b>CANOPY RECESSED SINGLE POINT</b> CRSW= Canopy Recessed Single Point White CRSB= Canopy Recessed Single Point Black
<u>CUSTOM</u>	<b>CANOPY RECESSED MULTIPLE POINT</b> CRMW= Canopy Recessed Multiple Point White CRMB= Canopy Recessed Multiple Point Black
PO= Powder Coat Other	<b>CANOPY RECESSED T-GRID SINGLE POINT</b> CRTW= Canopy Recessed T-Grid Single Point White CRTB= Canopy Recessed T-Grid Single Point Black
See pg. 6 for standard and premium options.	<b>CANOPY SURFACE MULTIPLE POINT</b> CSMW= Canopy Surface Multiple Point White CSMB= Canopy Surface Multiple Point Black
	<b>*Items in grey box require Hyperdrive Remote Driver*</b>

--	--

REMOTE OPTIONS	HYPERRIVE CIRCUIT
Ex= EM Battery designated fixture (ordered with yperdrive) Replace x with battery Qty. Not available with Powered Canopy, Consult factory	HDxx= HyperDrive Circuit Not required for the Powered Canopy configuration

EXAMPLE: HALODI-3-6000-4500-SD-CL-35K-80-PB-CRTB-U-HD01

\*\* See mounting details on page 3.  
' Requires Hyperdrive Remote Driver

Type:	
Project:	
REP/Agent:	
Order #:	

# HYPD HYPER DRIVE REMOTE POWER SYSTEM

HYPD	SIZE / DRIVER QTY	EMERGENCY BATTERY (OPTIONAL)	MOUNTING	FINISH
HYPD	<b>Replace x with driver quantity</b> <b>Sx</b> = Small- up to two drivers (190W)  <b>Mx</b> = Medium- up to four drivers (300W)  <b>Lx</b> = Large- up to eight drivers (600W)	<b>Replace # with battery quantity</b> <b>NB</b> = No Emergency Battery <b>#EMB6</b> = 6W EM Battery (Bodine) <b>#EMB10</b> = 10W EM Battery (Bodine) <b>#FCEMB10</b> = 10W EM Battery (Factory Choice)	<b>S</b> = Surface/ Strut <b>R</b> = Recessed	<b>STANDARD</b> <b>PW</b> = Powder Coat White <b>PB</b> = Powder Coat Black

**Note:** Batteries are only available in Medium and Large enclosures. Each emergency battery reduces the driver quantity of the Hyper Drive.

VOLTAGE	OPTIONS	HYPERRIVE CIRCUIT
U= 120-277	<p><b>SPECIALTY DRIVERS</b> (Standard driver is 0-10V, dim to 1% output current)</p> <p><b>DT1</b>= eldoLED EcoDrive Dim to 1% (0-10V)  <b>DTZ</b>= eldoLED SoloDrive Dim to 0.1% (0-10V)  <b>PSRD</b>= Signify Sensor Ready (DALI) Driver  <b>LDE1</b>= Lutron Hi-Lume EcoSystem LED driver w/ Soft-on, Fade-to-Black  <b>TW-A</b>= Tunable White, 0-10v  <b>TW-EL</b>= eldoLED DUALdrive Tunable White (DALI)          Consult factory for additional driver options</p> <p><b>Note:</b> Specialty driver options are not available with the small power-box option, with the exception of TW-A</p> <p><b>SENSORS</b>          Consult factory for options</p> <p><b>OTHERS</b>  <b>CP</b>= Chicago Plenum (CCEA)</p>	<b>HDxx</b> = HyperDrive Circuit

**EXAMPLE: HYPD-L8-R-PW-DTZ-HD01**


## NOTES & LIMITATIONS

One driver is required per direct only fixture (8' max length)

Consult factory for custom configurations and drivers not listed.

**L8 configuration shown** (shown with front cover removed)

Each driver is provided with a terminal block on both input and output side for ease of wiring and installation.

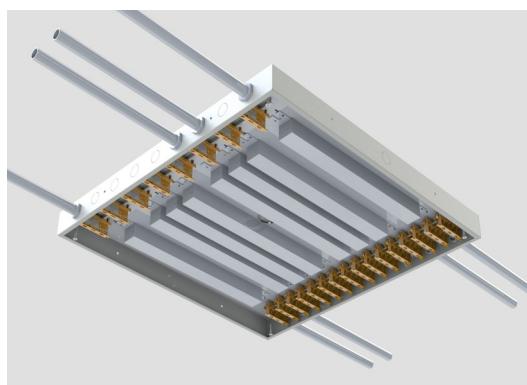


# HYPERRIVE REMOTE POWER SYSTEM


**STARTEK**  
LIGHTING AMERICA

## Sx (Small Hyper Drive Remote Canopy)

### Surface Mount

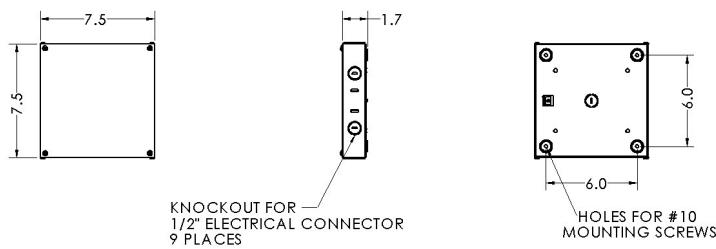


### Recessed Mount

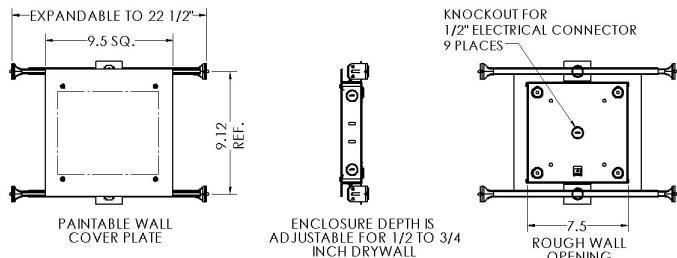


<b>Driver Form Factor</b>	Compact
<b>Input Rating</b>	120-277V
<b>Outputs</b>	Up to 2 (190W max)
<b>Max Remote Distance</b>	Up to 100' (30.5m)
<b>Knockouts</b>	(9) 1/2"
<b>Battery</b>	Not Available

## Mx (Medium Hyper Drive Remote Canopy)

### Surface Mount

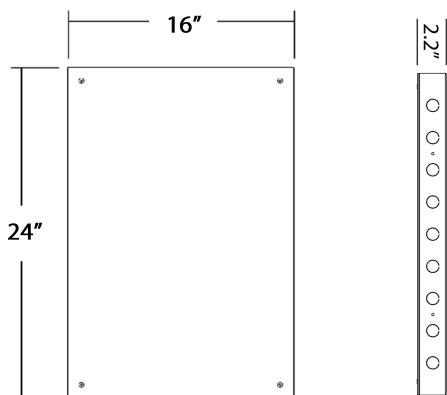


### Recessed Mount

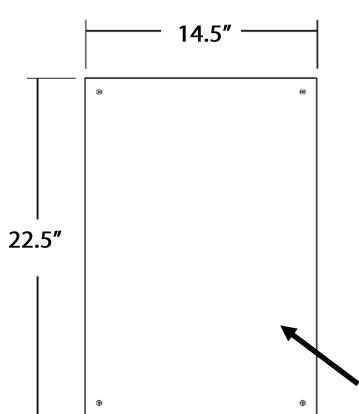


<b>Driver Form Factor</b>	Linear
<b>Input Rating</b>	120-277V
<b>Outputs</b>	Up to 4 (300W max)
<b>Max Remote Distance</b>	Up to 100' (30.5m)
<b>Knockouts</b>	(20) 1/2"
<b>Battery</b>	Available

## Lx (Large Hyper Drive Remote Canopy)

### Surface Mount

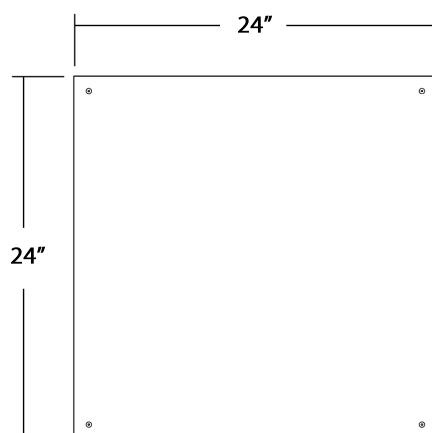

### Recessed Mount

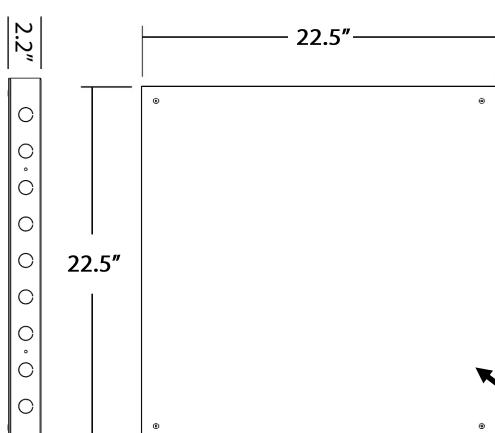

<b>Driver Form Factor</b>	Linear
<b>Input Rating</b>	120-277V
<b>Outputs</b>	Up to 8 (600W max)
<b>Max Remote Distance</b>	Up to 100' (30.5m)
<b>Knockouts</b>	(20) 1/2"
<b>Battery</b>	Available

## How to use this guide

Fill out the worksheet to specify your requirements for your configurations.  
Be sure to callout battery and sensor locations.

Refer to the run chart for standard run configurations on linear lengths,  
consult factory for custom configurations.

Use the order guide to create your BOM for your configuration.

Submit the worksheet along with your order.

## #1 Example Bill of Materials

Qty. Type


3	HALODI-4-5600-SD-35K-80-PB-CRSW-HD01	
1	HALODI-2-5600-SD-35K-80-PB-CRSW-HD01	
2	HALODI-2-5600-SD-35K-80-PB-CRSW-HD02	
1	HYPD-L8-NB-R-PW-DTZ-HD01	
1	HYPD-M4-NB-R-PW-DTZ-HD02	

## #2 Example Bill of Materials


Qty. Type

3	HALODI-4-5600-SD-35K-80-PB-CRSW-HD01	
1	HALODI-3-5600-SD-35K-80-PB-CRSW-HD01	
2	HALODI-3-5600-SD-35K-80-PB-CRSW-HD02	
1	HALODI-4-5600-SD-35K-80-PB-CRSW-E1-HD02	
1	HYPD-L8-NB-R-PW-DTZ-HD01	
1	HYPD-L6-1EMB10-R-PW-DTZ-HD02	



## #1 Example Configuration

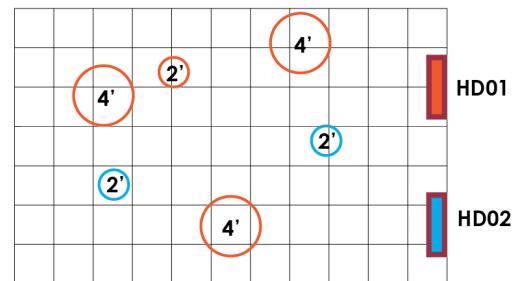



## #2 Example Configuration

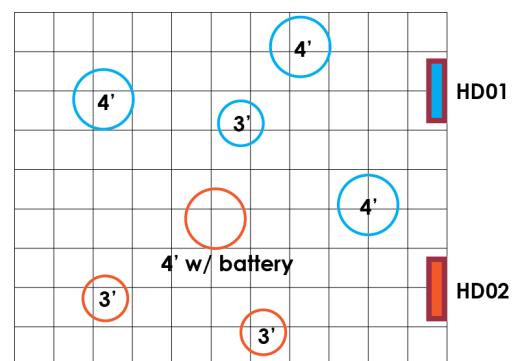


### PCSx - POWERED CANOPY SINGLE POINT (Driver Included)

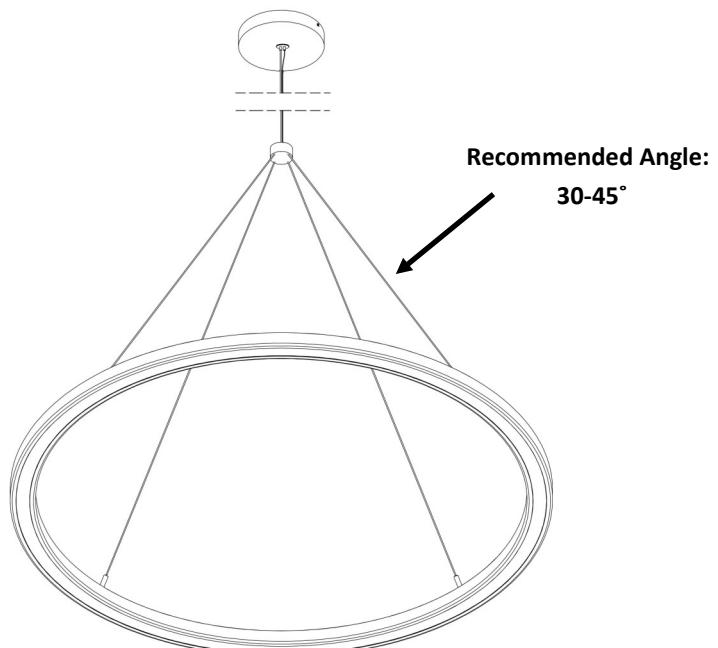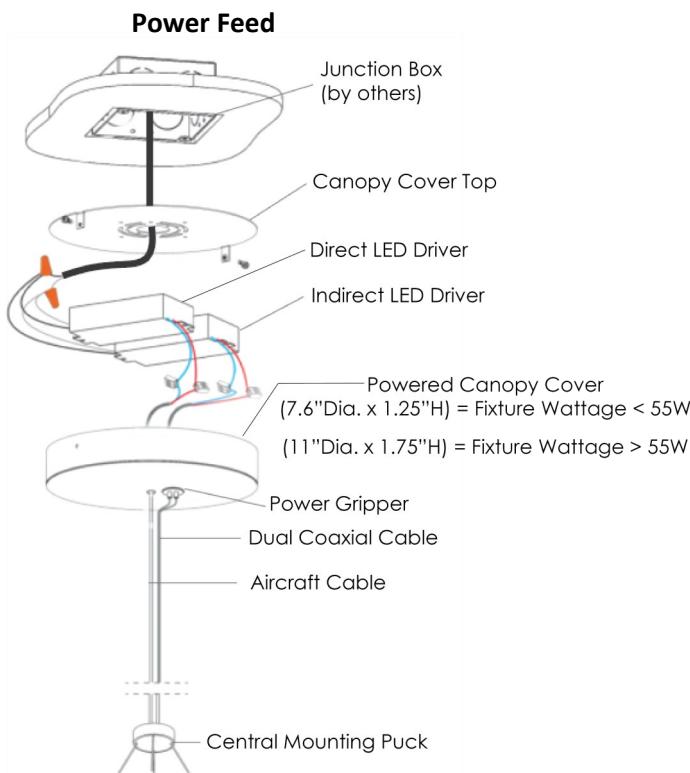

### PCMx-POWERED CANOPY MULTIPLE POINT (Driver Included)

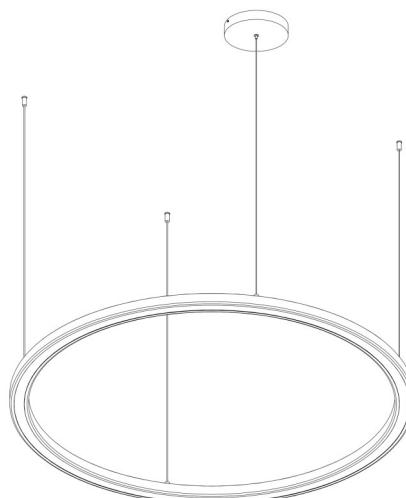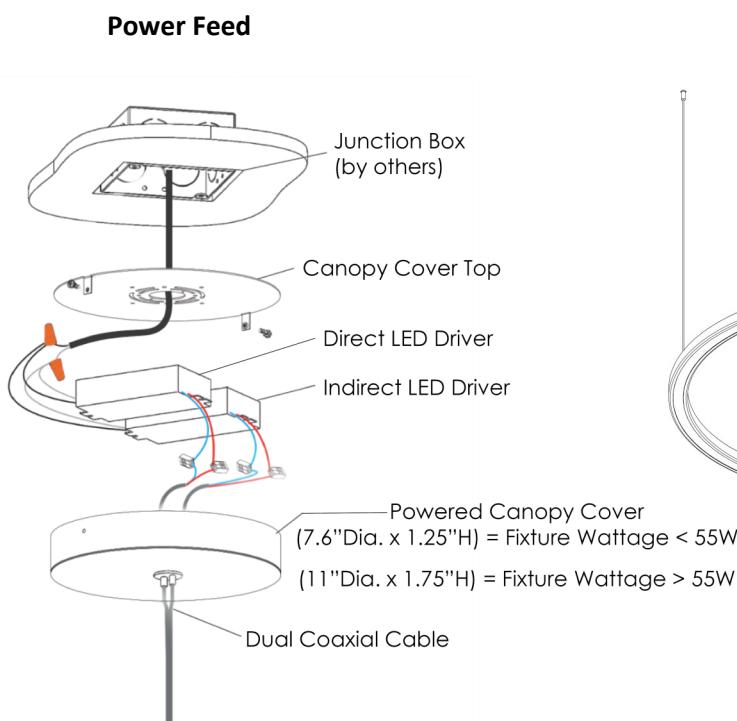


### Non-Feed

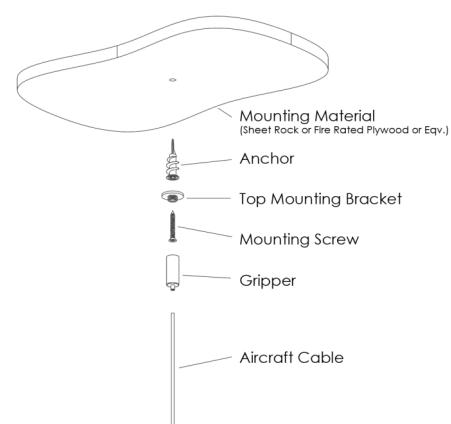

## CRSx - CANOPY RECESSED SINGLE POINT



### Power Feed

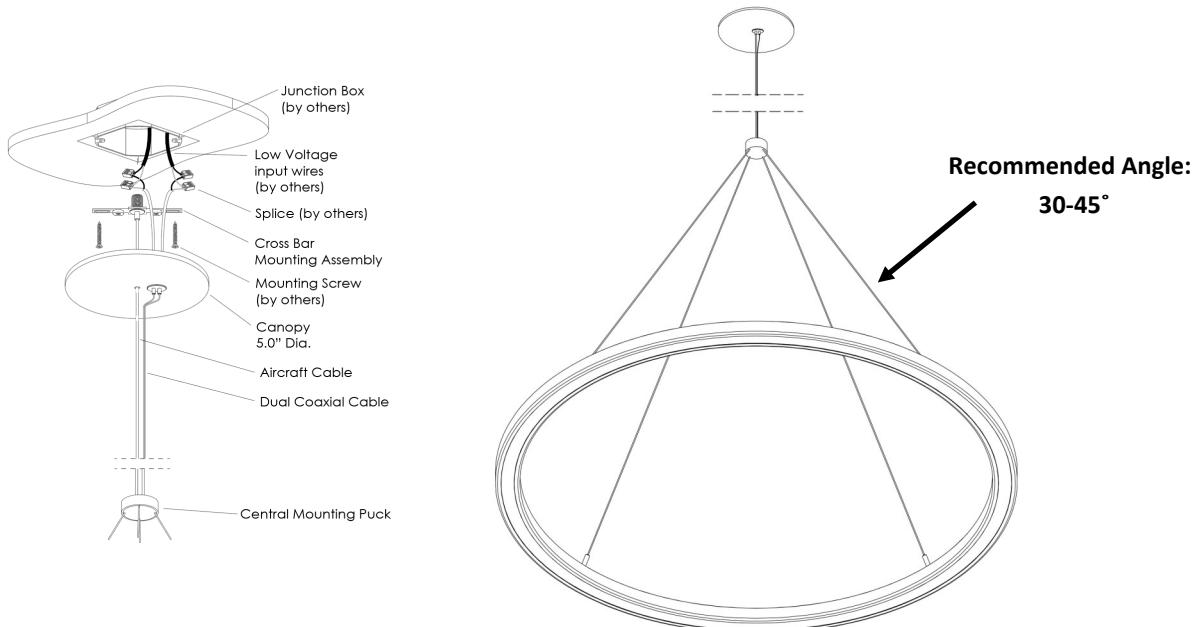


**REQUIRES**  
**HYPERDRIVE**

## CRMx - CANOPY RECESSED MULTIPLE POINT

### Power Feed

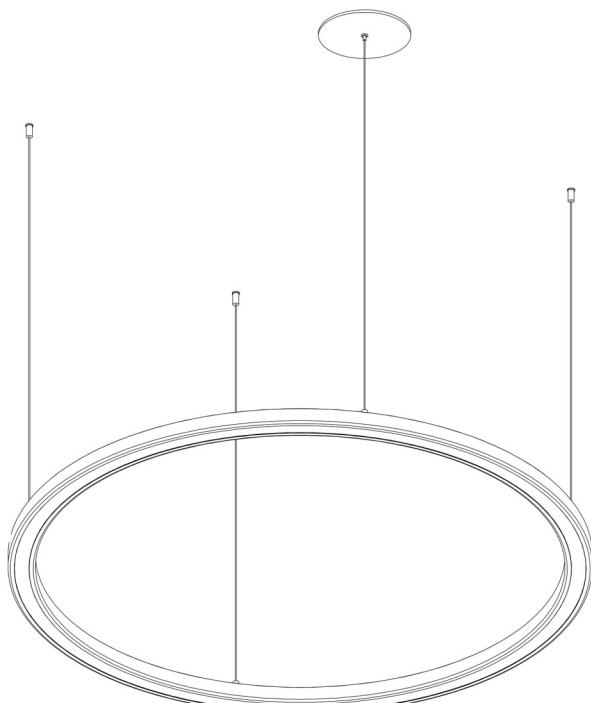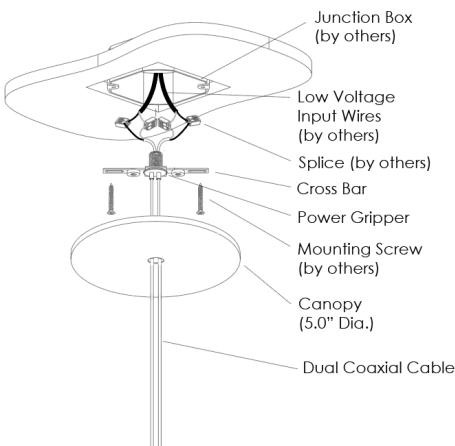



### Non-Feed

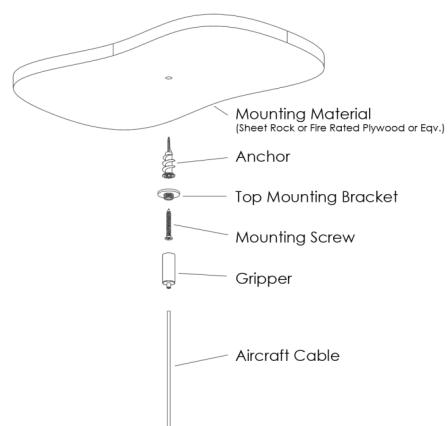

**REQUIRES**  
**HYPERDRIVE**

## CRTx - CANOPY RECESSED T-GRID SINGLE POINT



### Power Feed

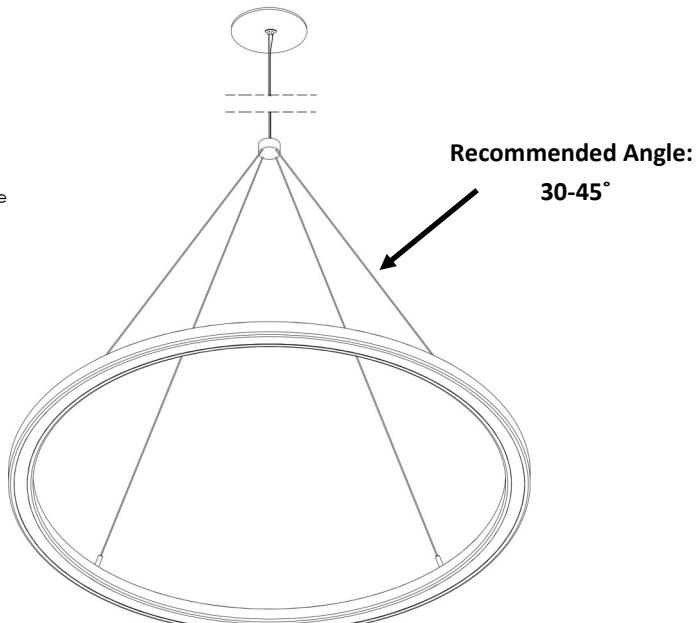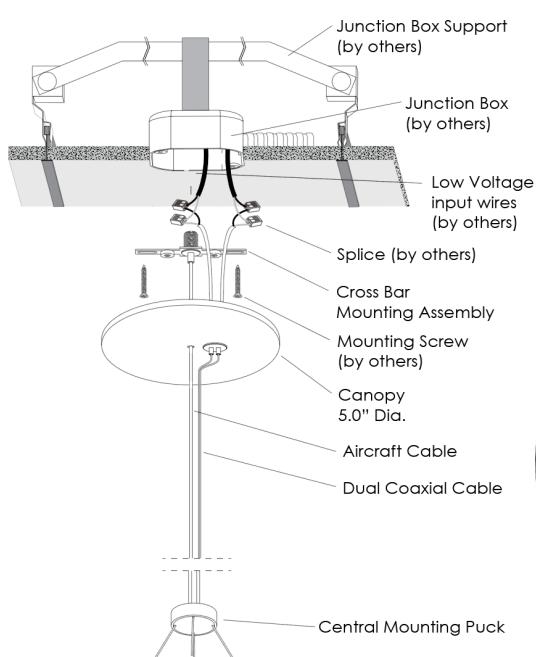

### REQUIRES HYPERDRIVE


## CSMx - CANOPY SURFACE MULTIPLE POINT

### Power Feed

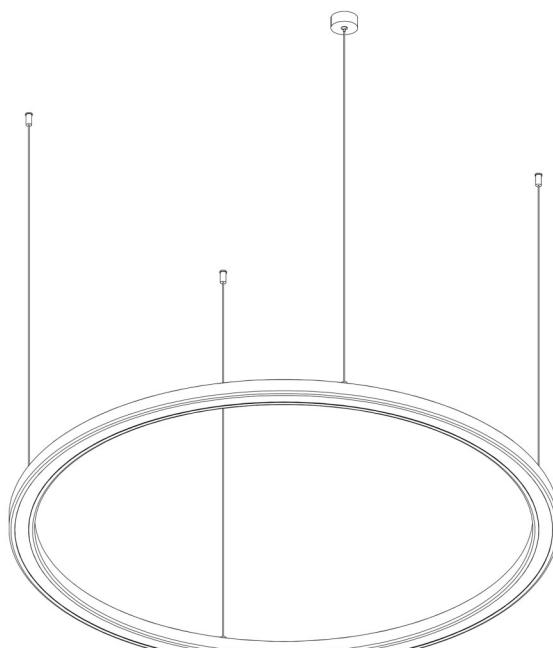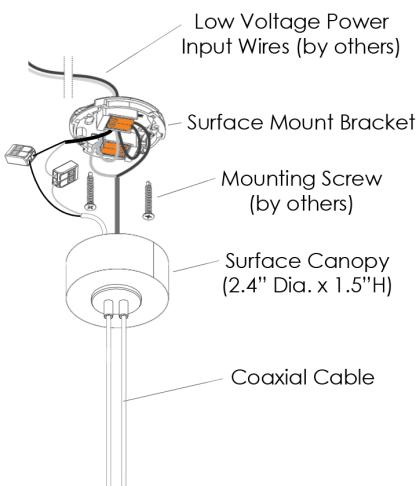

### REQUIRES HYPERDRIVE


### Non-Feed

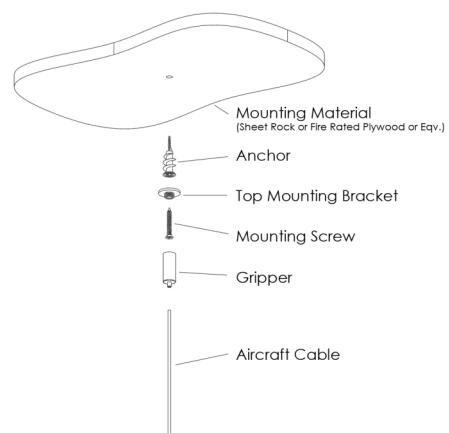


## STANDARD FINISHES



WHITE MINI TEXTURE



BLACK MINI TEXTURE



SILVER SPARKLE TEXTURE

## PREMIUM STOCK FINISHES



PSF001 (WOOD#1)



PSF002 (WOOD#2)



PSF003 (WOOD#3)



PSF004 (WOOD#4)



PSF005 (WOOD#5)



PSF006 (WOOD#6)



PSF007 (STONE #1)



PSF008 (STONE #2)



PSF009 (METAL #1)

**NOTE: Products specified with Premium Stock Finishes (PSF) and all other custom finishes (PO) will incur a set up fee and will also add an extended lead time to your project. It is not to be assumed that these finishes are stocked in our warehouse, but rather, are readily available to us for your project.**

### Housing

Constructed of #3003 extruded aluminum formed into 2', 3' or 4' diameter. All sizes assembled in once piece.

### Color

Colors for the housing are available in a powder coated white, black, and silver. Consult factory for custom colors.

### Source

Four color temperature options (3000K, 3500K, 4000K and 5000K) — all within 3 MacAdam ellipses.

### Certification

Intertek cETLus Listed. RoHS (Restriction of Hazardous Substances) and Buy American Act compliant.

### Packaging

Sustainably manufactured outside cardboard box and biodegradable, protective poly-foam luminaire inserts.

### Environment

Suitable for dry and damp locations.

Operating temp.: -40°C to +50°C

-40°F to +122°F

### Lensing

1/8" thick impact resistant acrylic lensing.

### Control

Compatible with external daylight/occupancy sensors by default.

### Dimming Driver

UL listed, class P (0-10V) dimming driver with programmable current for configurable fixture lumen outputs.

2.5 KV overcurrent protection

Power factor >.9

## WARRANTY

5-year limited warranty.

Note: Actual performance may differ as a result of installation environment and final application.  
All values are design or typical values, measured under laboratory conditions, at 25°C (77°F).