



Type:	
Project:	
REP/Agent:	
Order #:	


SLIM BEAM DIRECT/INDIRECT

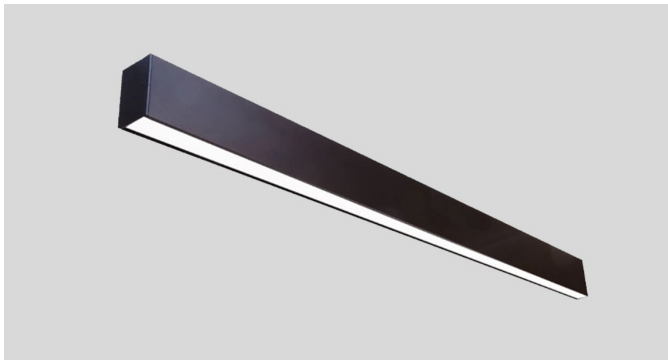


DIFFUSING




FLUSH, H: 3.5"



DLE05, H: 4.0"




DLE10, H: 4.5"




DLE15, H: 5.0"


DISTRIBUTION



Direct: SD= SatinIce Diffuse
Indirect: CL= Clear



Direct: WD= Wide Diffuse
Indirect: BW= Batwing




Direct: WW= Wall Wash
Indirect: BW= Batwing

FEATURES

- ★ Continuous lensing standard– runs up to 200'
- ★ Extruded aluminum single piece housing
- ★ Standard 2', 4', 6' and 8' units, or continuous rows
- ★ Linear runs with proprietary joiner design
- ★ Direct & indirect light levels can be set to any combination at the factory
- ★ Efficacy up to 140 lm/W
- ★ Soft diffuse direct lighting
- ★ Textured powder coat finishes available in white, black and silver
- ★ Premium finishes also available
- ★ Approved for dry and damp locations
- ★ 0-10v dimming is standard
- ★ Dim to 1% of output current is standard
- ★ 90 CRI (R9 50min) available
- ★ CA Title 24 / JA8 installation compatible
- ★ Consult factory for TM21, TM30, LM79 and LM80

DIMENSIONS

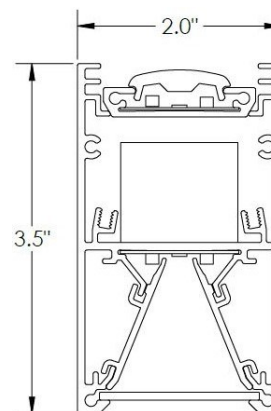

Type:	
Project:	
REP/Agent:	
Order #:	

SLIM BEAM DIRECT/INDIRECT

SLIMDI					
SERIES	LENGTH	DIRECT LUMENS PER FOOT	INDIRECT LUMENS PER FOOT	DIRECT DISTRIBUTION	INDIRECT DISTRIBUTION
SLIMDI	xx = Run Length Sxx = Symmetric Run Length _x_RECT = Rectangle _x_L = L-Shape _x_x_U = U-Shape	350 = 350 LPF 500 = 500 LPF 750 = 750 LPF 1000 = 1000 LPF XXX = Custom LPF	350 = 350 LPF 500 = 500 LPF 750 = 750 LPF 1000 = 1000 LPF XXX = Custom LPF	SD = Satinice Diffuse WD = Wide Diffuse WW = Wall Wash DLE05 = 0.5" Drop Lens w/ Lit Ends DLE10 = 1.0" Drop Lens w/ Lit Ends DLE15 = 1.5" Drop Lens w/ Lit Ends	CL = Clear Lens BW = Batwing

Seamless Continuous Lensing Unavailable for Drop Lens Options.

CCT	CRI	FINISH	MOUNTING	VOLTAGE	ELECTRICAL
30K = 3000K 35K = 3500K 40K = 4000K 50K = 5000K TW = Tunable white ¹ (2700-6500K)	80 = 80 90 = 90 (R9 50 min)	STANDARD PW = Powder Coat White PB = Powder Coat Black PS = Powder Coat Silver PREMIUM RALxxx = Powder Coat RAL xxxx (Gloss Finish) PSFx = Prem Stock Finish CUSTOM PO = Powder Other See pg.8 for standard and premium options.	CABLES WITH CANOPY KITS ACW05 = White Cord 5' ACW10 = White Cord 10' ACB05 = Black Cord 5' ACB10 = Black Cord 10' CABLES WITH LOOPS ALW10 = White Cord 10' ALB10 = Black Cord 10' WALL MOUNTS WM = Wall Mount AWM = Architectural Wall Mt EWMxx = Extruded Wall Mount, xx" STEM WITH CANOPY KITS STEMWxx = Stem White, xx" STEMBxx = Stem Black, xx"	U = 120-277 C = 347	1C = Single Circuit 2C = Separate D/I Circuits (separate control of direct and indirect) MC = Multiple Circuits (multiple switch legs across run length) EC = Emergency Circuit (separate power drops for EC fixtures) GTD = Generator Transfer Device

OPTIONS

SPECIALTY DRIVERS (Standard driver is 0-10V, dim to 1% output current)

DT1=eldoled EcoDrive Dim to 1% (0-10V)
DTZ=eldoled SoloDrive Dim to 0.1% (0-10V)
PSRD=Philips Sensor Ready (DALI) Driver
LDE1=Lutron Hi-Lume EcoSystem LED driver with Soft-on, Fade-to-Black
TW-A=Tunable White, 0-10v²
TW-EL=eldoled DUALdrive Tunable White (DALI)²
LD2=Lutron DALI 2 Digital Tunable White driver with 1% dimming²
RD-xx'-xxxxx= Remote Driver 120V-277V
 Consult Factory

BATTERIES

#EMB6=6W EM Battery (Iota/Bodine)
#EMB10=10W EM Battery (Iota/Bodine)
#FCEMB10= 10W EM Battery (Factory Choice)
#FCEMB14= 14W EM Battery (Factory Choice)

SENSORS

DMxx%=Daylight/Motion Sensor (xx%= % Min. Dimming)
VDO=Lutron Vive Integral fixture control (RF w/ daylight and occupancy)
AWN-R-W= Lutron Athena Wireless Node (RF only)³ - White Finish
AWN-R-B= Lutron Athena Wireless Node (RF only)³ - Black Finish
AWN-S-W= Lutron Athena Wireless Node with Sensor - White Finish
AWN-S-B= Lutron Athena Wireless Node with Sensor - Black Finish
NLA= Acuity nLight Air
WVL= Cooper Wavelinx

ENDCAPS

RD = Round Endcap (not available with Drop Lens options)

¹ Tunable White Driver must be specified in options

² 50 Watt Max. Dual driver required for higher fixture wattage


³ D4i driver for static & DALI-2 Type 8 for tunable.

EXAMPLE: SLIMDI-40-500-750-WD-BW-35K-90-PW-ACW10-U-1C-1EMB10


SLIM BEAM DIRECT/INDIRECT

MOUNTING OPTIONS


ACxxx (Aircraft Cable with Canopy) - Drywall, Solid, Tile (On-Grid), Tile (Off-Grid)

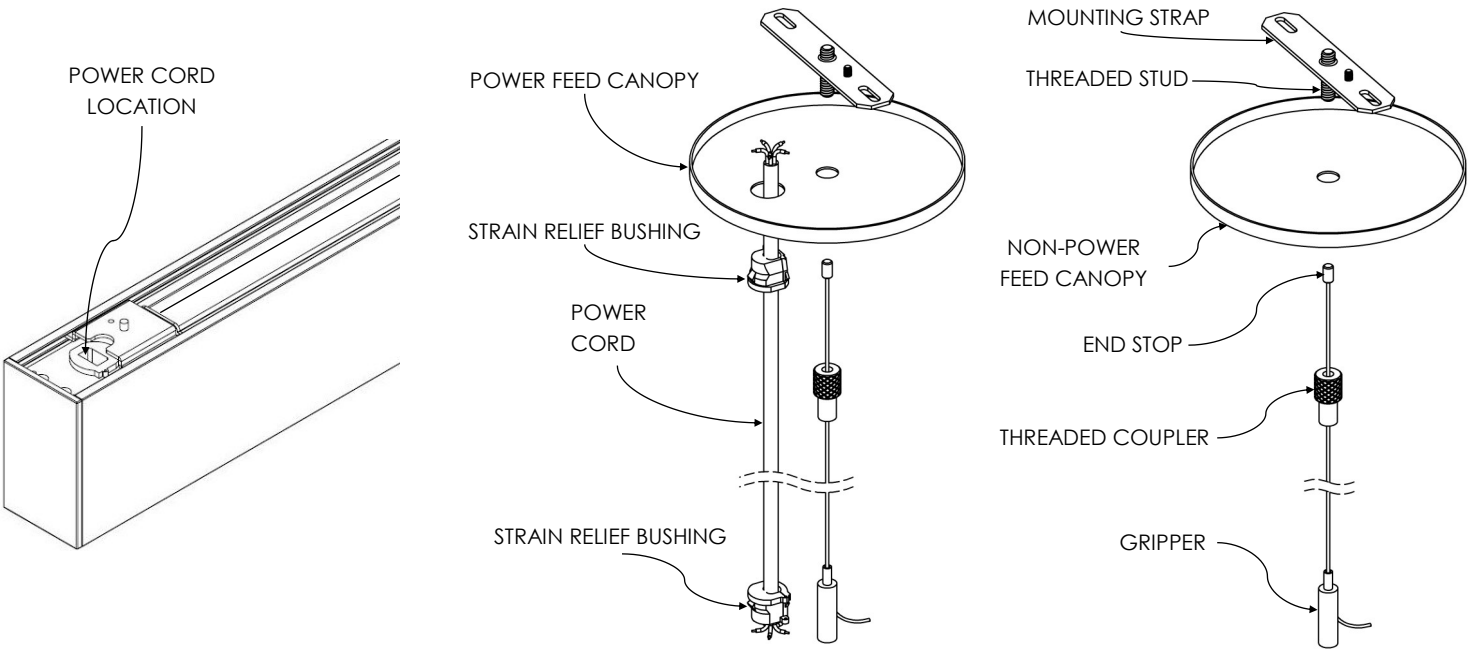


ALxxx (Aircraft Cable with Loops)

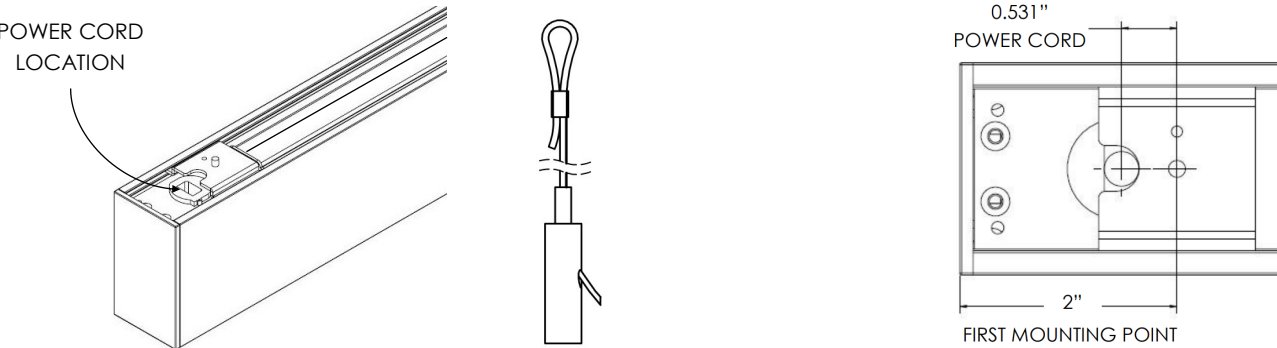

WM (Wall Mount)

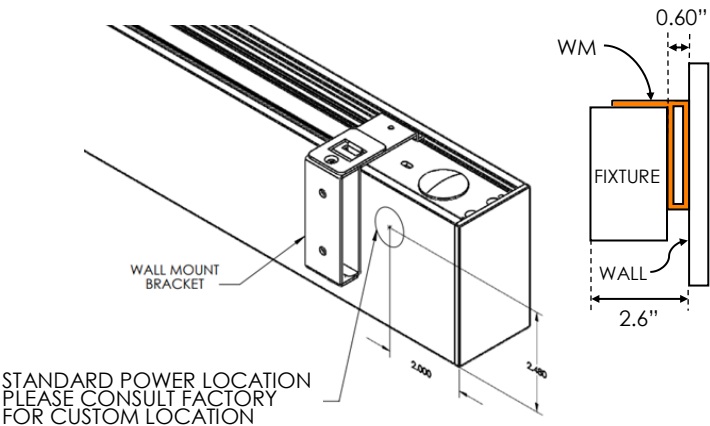

AWM (Architectural Wall Mount)



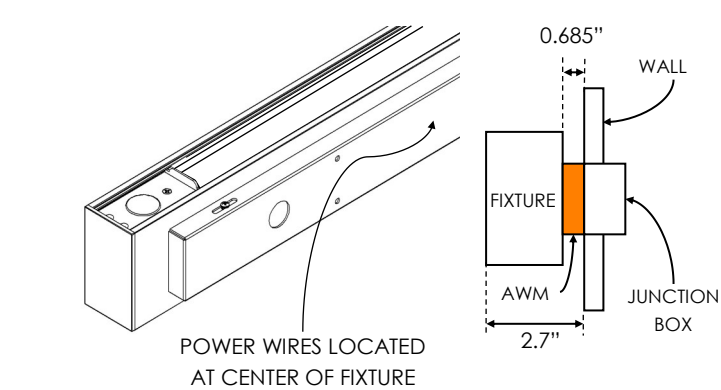


SLIM BEAM DIRECT/INDIRECT



MOUNTING OPTIONS, CONTINUED

EWM (Extruded Wall Mount)

*Note: 3" standard EWM, custom sizes available up to 12"

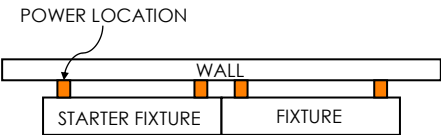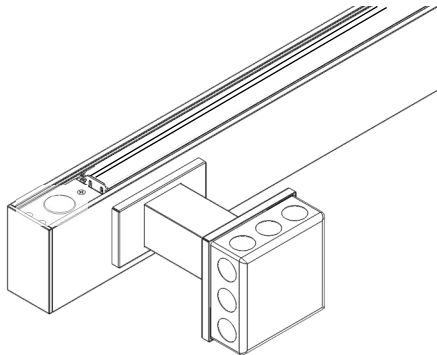

STEMWxx, STEMBxx (Stem Mount)

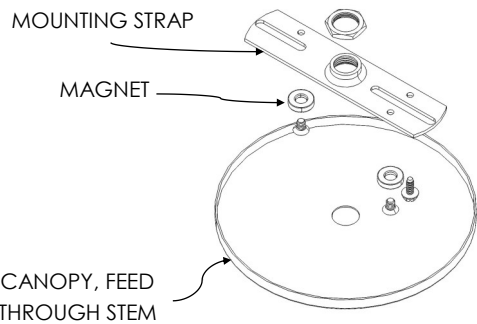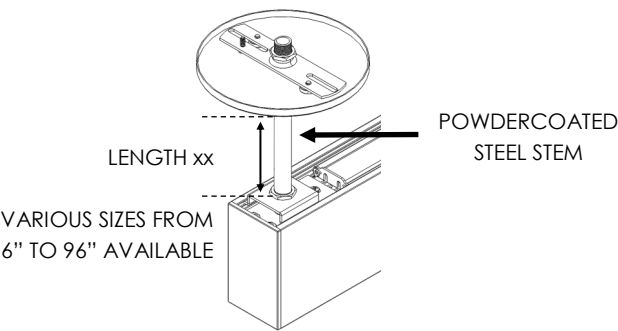

ROW CONFIGURATIONS

xx (Run Length)

The standard construction of run lengths follows the logic of the table below. Consult factory for additional information.
Run lengths always start with the longest fixture and receives the power feed.

		Total Length																																								
		2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40		
# of Sections	2	1																																								
	3		1																																							
	4			1					1	1	1	1					1	1	1	1					1	1	1	1					1	1	1	1						
	5				1				1				1				1				1				1				1				1				1					
	6					1				1				1				1				1				1				1				1				1				
	7						1				1				1				1				1				1				1				1				1			
	8							1				1	1	1	1	1	2	1	1	1	2	2	2	2	3	2	2	2	3	3	3	3	4	3	3	3	4	4	4	4	4	5

NOTE: Fixtures in continuous runs are available in 6" increments. Consult factory for smaller increments.

Sxx (Symmetric Run)

The construction of Sxx (y') is to build with equal length fixtures. The xx indicates the run length. The y' indicates the fixture length used to create the run. Please indicate this on your P.O. when placing your order.

S12' (2')	2'	2'	2'	2'	2'	2'
S12' (3')	3'	3'	3'	3'		
S12' (4')	4'	4'	4'			
S12' (6')	6'	6'				

MOUNTING LOCATIONS

Each starter or individual fixture will be provided with (2) mounting supports (●). Each additional fixture will be provided with (1) support which can be located anywhere along the 2nd half of the fixture (highlighted below):


Examples of continuous run mounting locations are as follows:

12' RUN	<div><div></div><div>8'</div><div></div><div>4'</div></div>
16' RUN	<div><div></div><div>8'</div><div></div><div>8'</div></div>
20' RUN	<div><div></div><div>8'</div><div></div><div>8'</div><div>4'</div></div>
24' RUN	<div><div></div><div>8'</div><div></div><div>8'</div><div>8'</div></div>
28' RUN	<div><div></div><div>8'</div><div></div><div>8'</div><div>8'</div><div>4'</div></div>


SLIM BEAM DIRECT/INDIRECT

JOINT SHAPE CONFIGURATION WITH MITER CUTS


We provide joint configurations in the stock size of 24" X 24" as shown below.

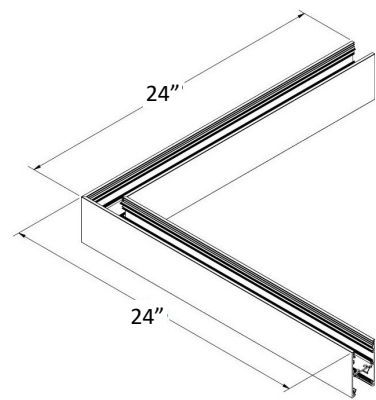


_x_RECT
Rectangle
Supply AxB dimensions

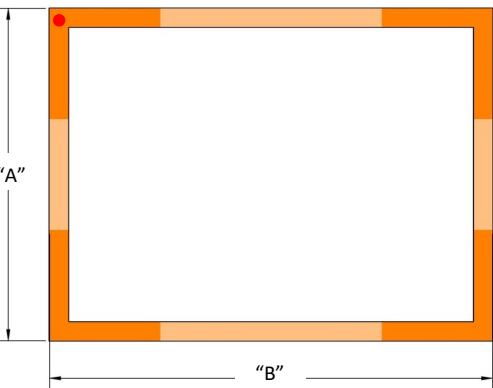

_x_L
L-Shape
Supply AxB dimensions

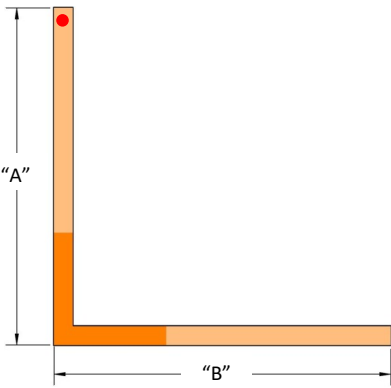


_x_x_U
U-Shape
Supply AxBxC dimensions

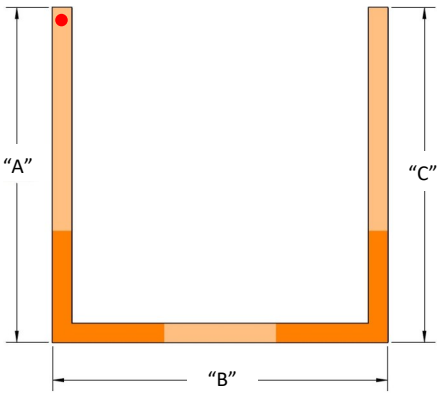

● = Power Location

ENDCAP OPTIONS




RD, H: 3.5"

SLIM BEAM DIRECT/INDIRECT

PERFORMANCE


SLIMDI-X-325-750-WD-BW (80+ CRI)

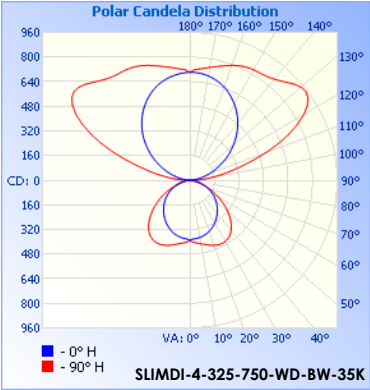

Model	Lumens	Watts	LPW
SLIMDI-4-325-750-WD-BW-30K	4300	37	116
SLIMDI-4-325-750-WD-BW-35K	4300	36	120
SLIMDI-4-325-750-WD-BW-40K	4300	35	124
SLIMDI-4-325-750-WD-BW-50K	4300	34	126

Model	Lumens	Watts	LPW
SLIMDI-8-325-750-WD-BW-30K	8600	72	119
SLIMDI-8-325-750-WD-BW-35K	8600	71	121
SLIMDI-8-325-750-WD-BW-40K	8600	68	127
SLIMDI-8-325-750-WD-BW-50K	8600	67	128

SLIMDI-X-400-375-SD-CL (80+ CRI)

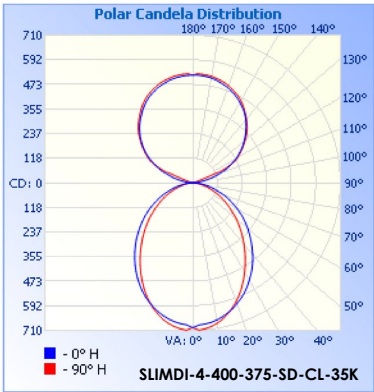


Model	Lumens	Watts	LPW
SLIMDI-4-400-375-SD-CL-30K	3,025	25	122
SLIMDI-4-400-375-SD-CL-35K	3,025	24	128
SLIMDI-4-400-375-SD-CL-40K	3,025	23	132
SLIMDI-4-400-375-SD-CL-50K	3,025	23	134

Model	Lumens	Watts	LPW
SLIMDI-8-400-375-SD-CL-30K	6,050	47	128
SLIMDI-8-400-375-SD-CL-35K	6,050	45	134
SLIMDI-8-400-375-SD-CL-40K	6,050	44	138
SLIMDI-8-400-375-SD-CL-50K	6,050	43	141

STANDARD FINISHES



WHITE MINI TEXTURE



BLACK MINI TEXTURE




SILVER SPARKLE TEXTURE


PREMIUM STOCK FINISHES




PSF001 (WOOD#1)

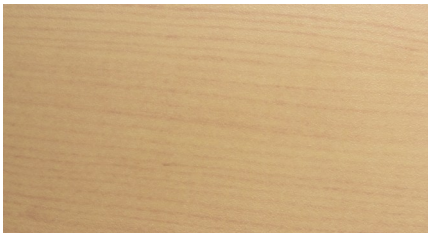

PSF002 (WOOD#2)

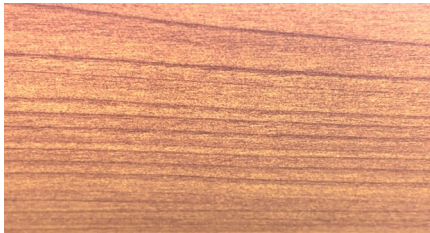


PSF003 (WOOD#3)

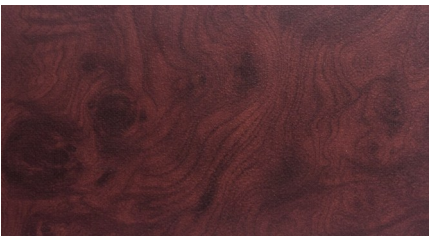

PSF004 (WOOD#4)



PSF005 (WOOD#5)

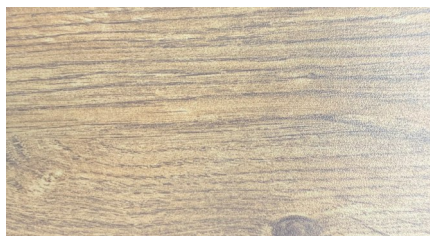


PSF006 (WOOD#6)



PSF007 (STONE #1)



PSF008 (STONE #2)

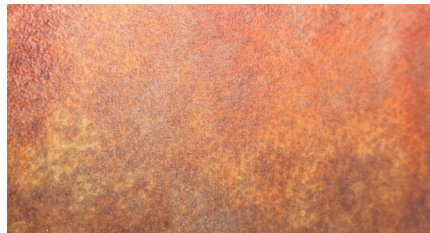

PSF009 (METAL #1)

NOTE: A minimal impact to lead times will apply to products specified with Premium Stock Finishes (PSF). It is not to be assumed that these finishes are stocked in our warehouse, but rather, are readily available to us for your project. All other custom finishes (PO) will incur a set up fee and will add an extended lead time to your project.

SLIM BEAM DIRECT/INDIRECT

SPECIFICATIONS

Housing

Nominal 2" x 3.5" x .075" thick housing of continuous extruded 6063 T5 aluminum.

Color

Colors for the housing are available in a powder coated white, black, silver, and woodgrain with end cap to match. Consult factory for custom colors.

Luminaire Length

2', 4', 6' or 8' lengths are available for a single stand-alone section. Using internal joiners, these sections can be joined to form longer rows.


End Caps

Injection molded flat end caps are mechanically attached with no exposed fasteners to enhance architectural aesthetic and prevent light leak.


CONTROL

Sensor

Wattstopper FS-205 v2 Low Voltage PIR. Integrated photosensor for hold-off daylighting control. 24VDC operating voltage. Adjustable time delay (30 seconds to 30 minutes).

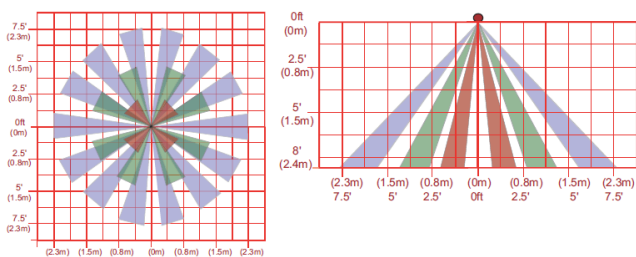

Wireless Node

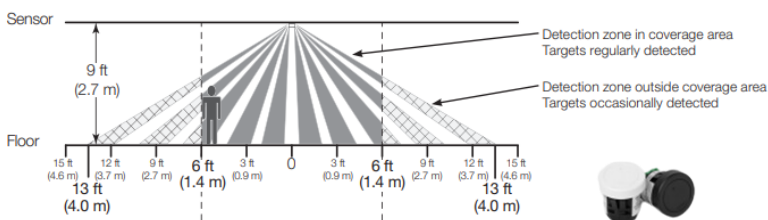

WARRANTY

5-year limited warranty. Complete warranty terms can be located at:

http://www.starteklightingamerica.com/images/pdf/warranty/Beam_Series_Warranty.pdf

Note: Actual performance may differ as a result of installation environment and final application.
All values are design or typical values, measured under laboratory conditions, at 25°C (77°F) .

Source

Lumen packages are available in four color temperature options (3000K, 3500K, 4000K and 5000K) — all within 3 MacAdam ellipses.

Certification

Intertek cETLus Listed. RoHS (Restriction of Hazardous Substances) and Buy American Act compliant.

Battery

Lithium ion battery providing up to 780lm(6W) or up to 1300lm(10W) for 90 minutes. UL924 listed. Class 2 compliant. Meets Title 20 CEC (California Energy Commission) efficiency standards.

Environment

Suitable for dry and damp locations.
Operating temp.: -40°C to +50°C
-40°F to +122°F

Dimming Driver (Integral Driver)

Constant current programmable LED driver. UL listed, class P, 0-10V, dim to 1% of output current. 2.5KV ring wave surge protection and >.90 power factor.

Packaging

Sustainably manufactured outside cardboard box and biodegradable, protective poly-foam luminaire inserts.

COMPANION

Slim Beam Direct



Slim Beam Surface Mount



Recessed Slim Beam

