


INSTALLATION INSTRUCTIONS



THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
CE PRODUIT DOIT ETRE INSTALLE SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAIT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHERENTS.
DISCONNECT POWER PRIOR TO ANY INSTALLATION.
DEBRANCHEZ LE COURANT AVANT TOUTE INSTALLATION.
CAP ALL WIRING CONNECTIONS WITH UL APPROVED WIRE CONNECTORS.
COUVRIR TOUTES LES CABLES AVE DES CONNECTIONS APPROUVEES (UL).
VERIFY SUPPLY VOLTAGE MEETS LUMINAIRE LABEL SPECIFICATIONS.
VERIFIEZ QUE LA TENSION SOIT COMPATIBLE AVEC LES CARACTERISTIQUES DU LUMINAIRE MARQUE SUR LETIQUETTE.
ALLOW FIXTURE TO COOL BEFORE TOUCHING HEATSINK OR LIGHT SOURCE.
LAISSEZ LE PROJECTEUR REFOIDIR AVANT DE TOUCHER LE RADIATEUR OU LA SOURCE DE LUMIERE.
DO NOT ATTEMPT TO OPEN OR MAKE REPAIRS INSIDE LUMINAIRE.
NE PAS TENTER DOUVRIRE OU DE FAIRE DES REPARATINS A L'INTERIEUR DU LUMINAIRE.
AVOID DIRECT VIEWING OF LIGHT SOURCE.
EVITEZ DE REGARDER DIRECTMENT LA SOURCE LUMINEUSE.
THIS PRODUCT MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN.
CE PRODUIT DOIT ITRE INSTALLE PAR UN ELECTRICIEN QUALIFIE.
SUITABLE FOR UNDER-CABINET MOUNT.
ADAPTE POUR SOUS-CABINET MOUNT.
SUITABLE FOR DAMP LOCATION.
ADAOTE POUR DES ENDROITS HUMIDES.
SUITABLE FOR CONTINUOUS ROW MOUNTING.
ADAPTE POUR CONTINU ROW MONTAGE.






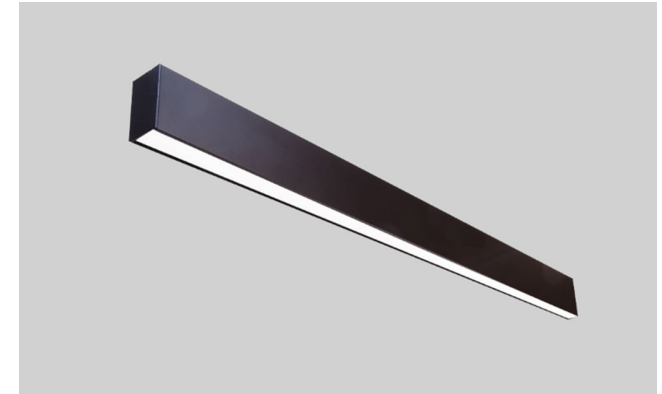


SLIM BEAM D BEAM D TALL BEAM D

Note: All pictures shown are of the Slim Beam D







INSTALLATION INSTRUCTIONS

Individual Pendant Mount (ACxxx)

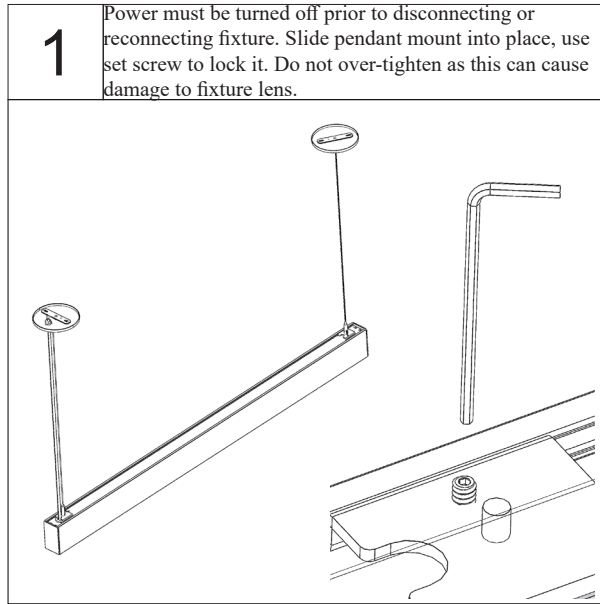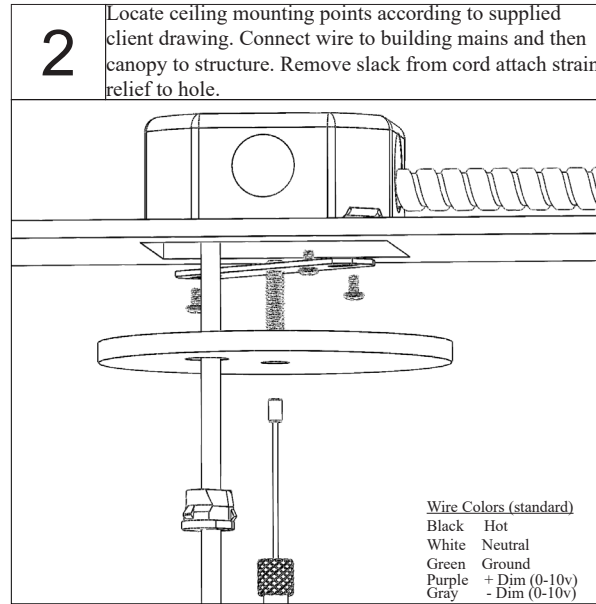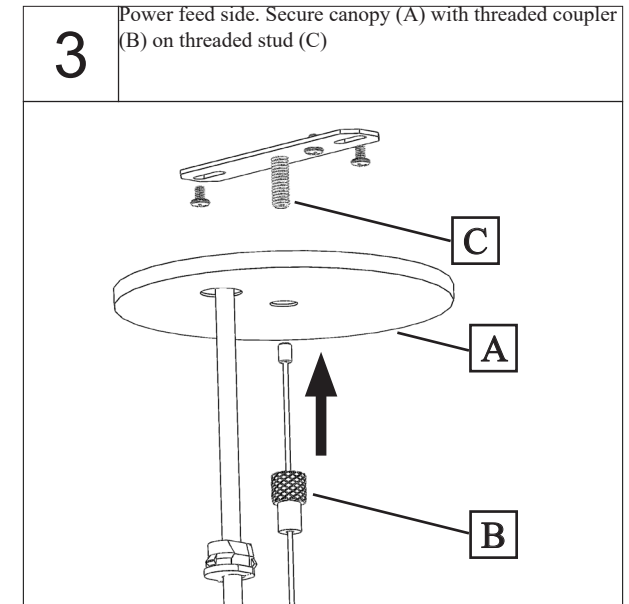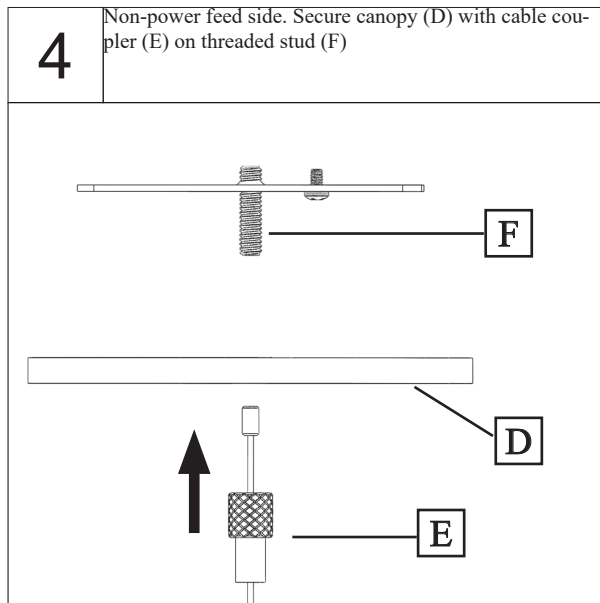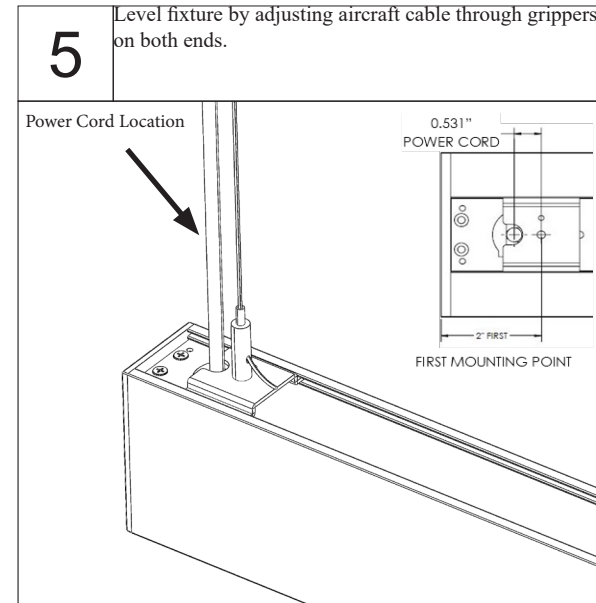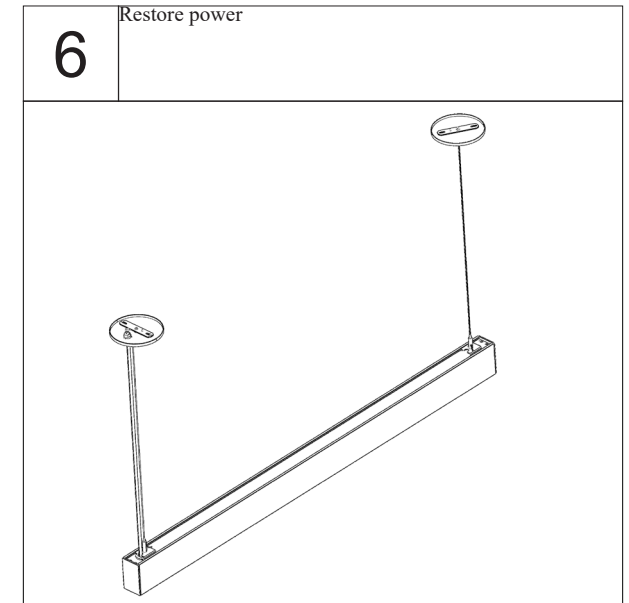







INSTALLATION INSTRUCTIONS

Continuous Pendant Mount Cont. (ACxxx)

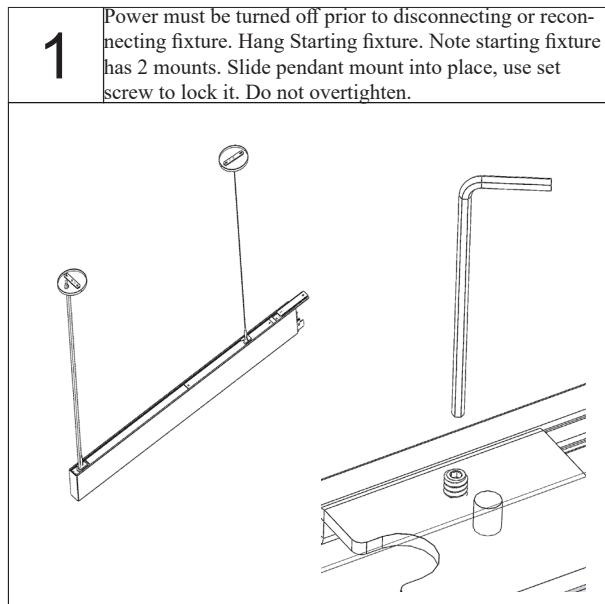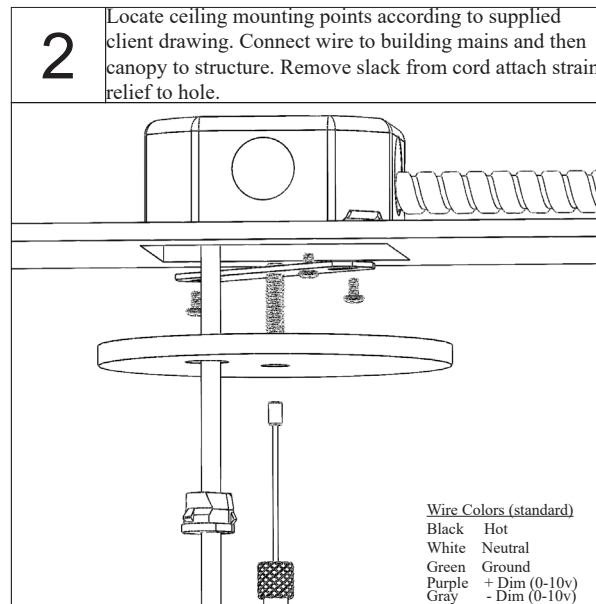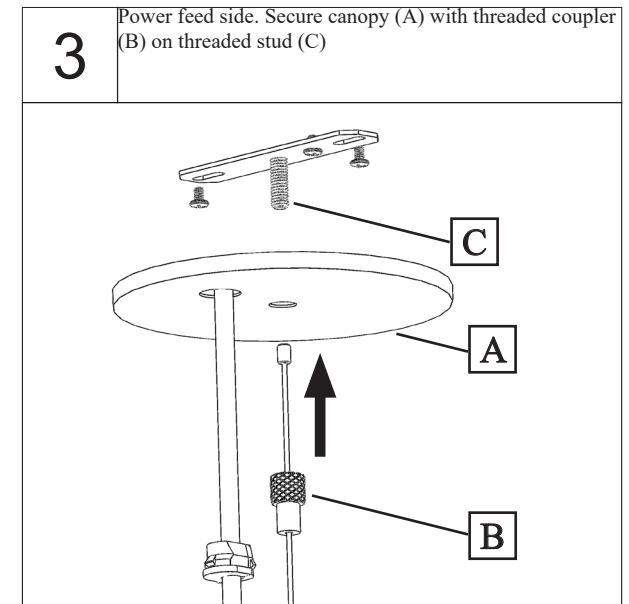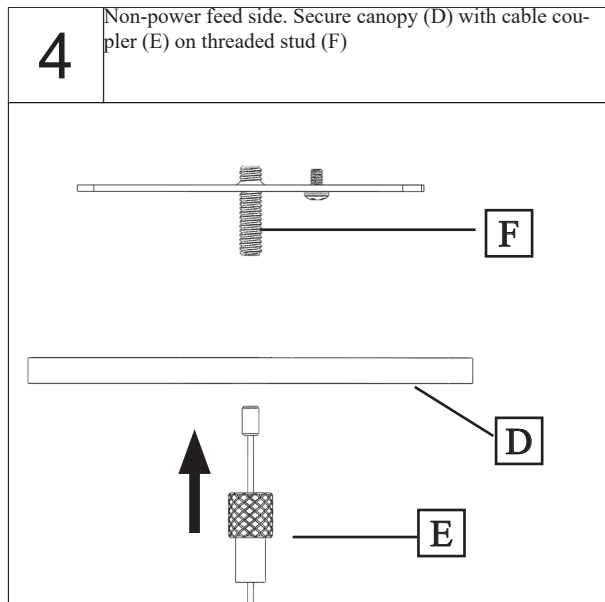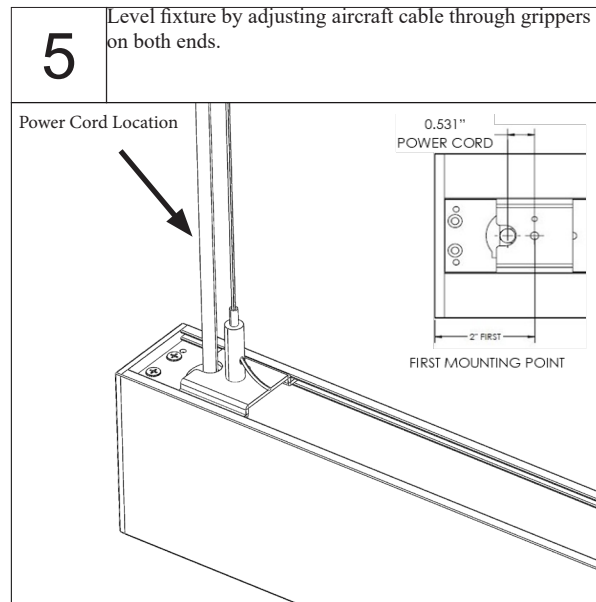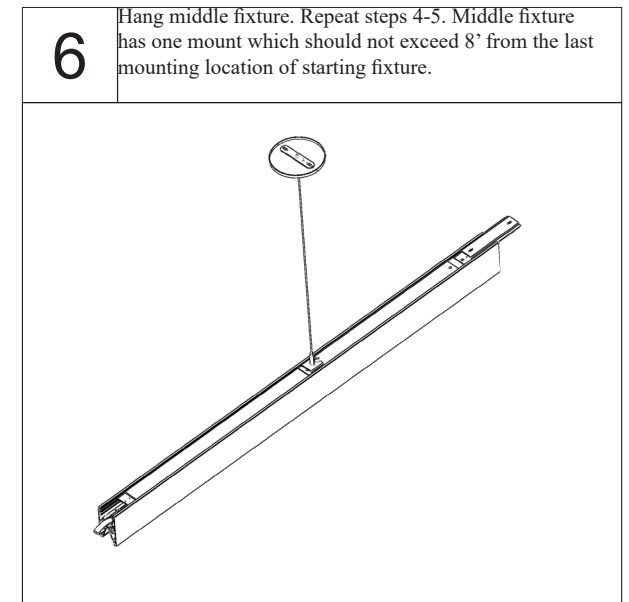

INSTALLATION INSTRUCTIONS


Continuous Pendant Mount Cont. (ACxxx)

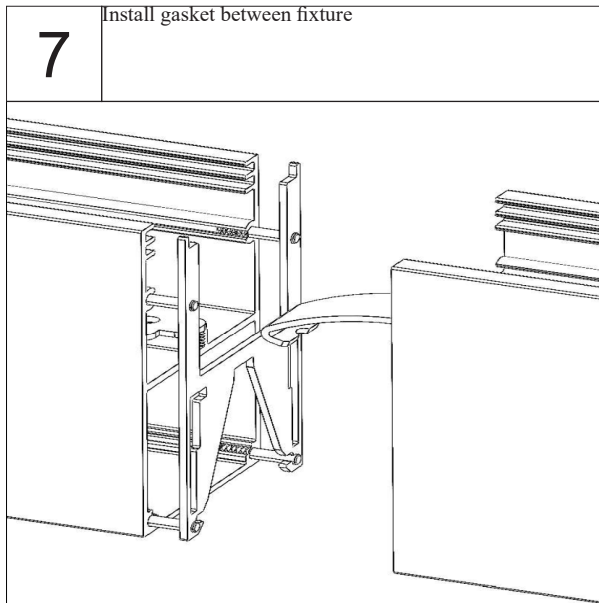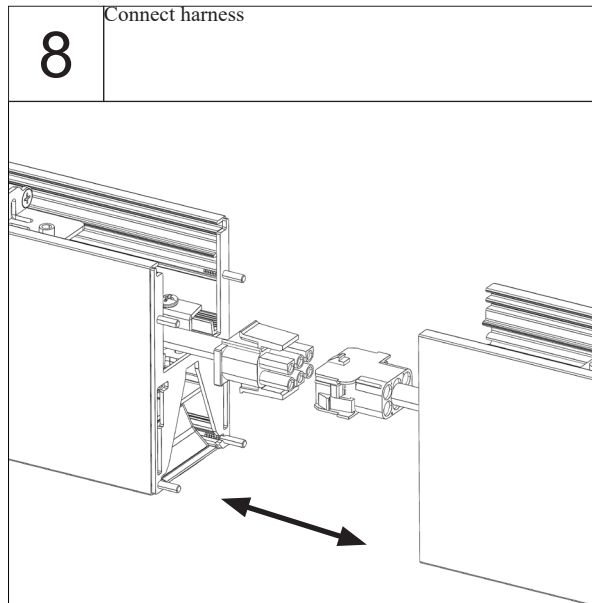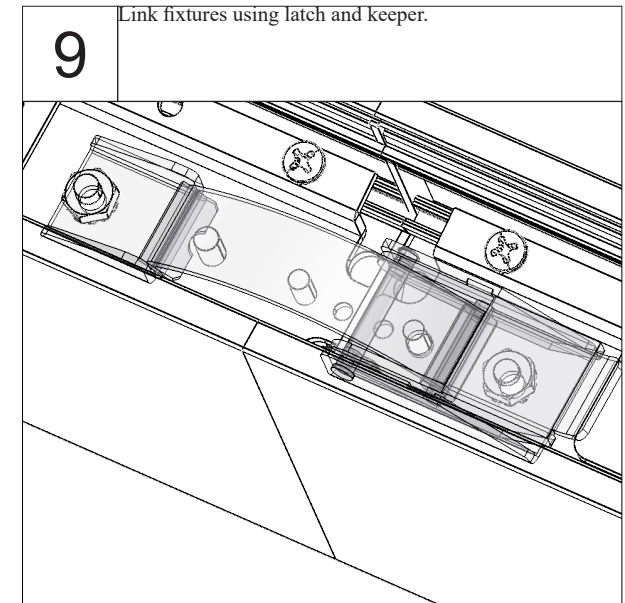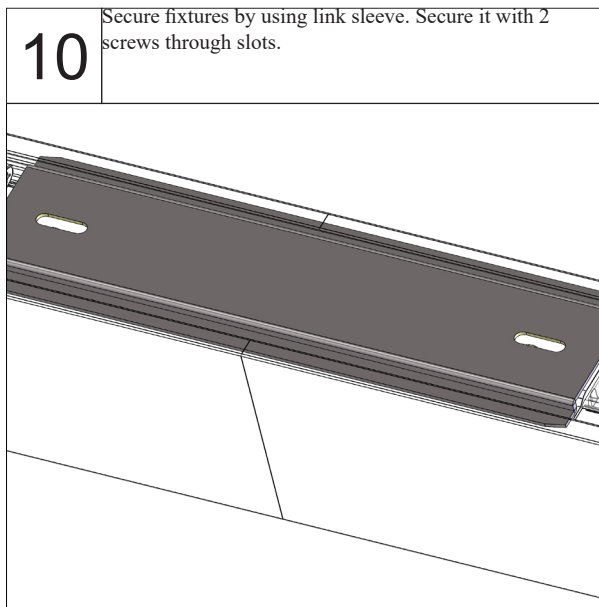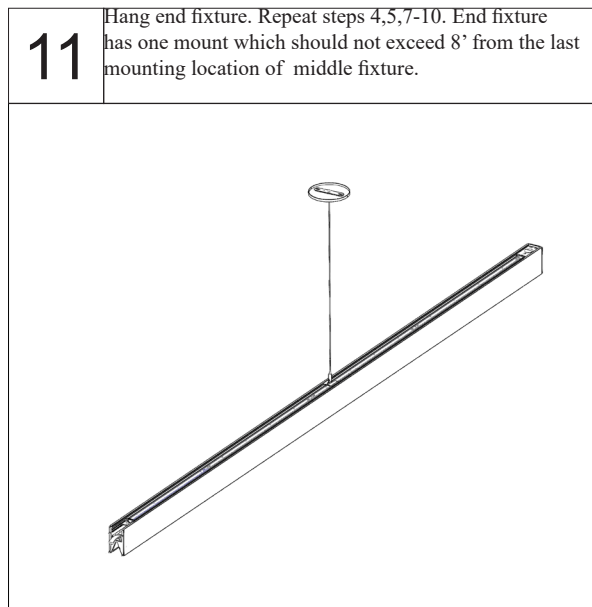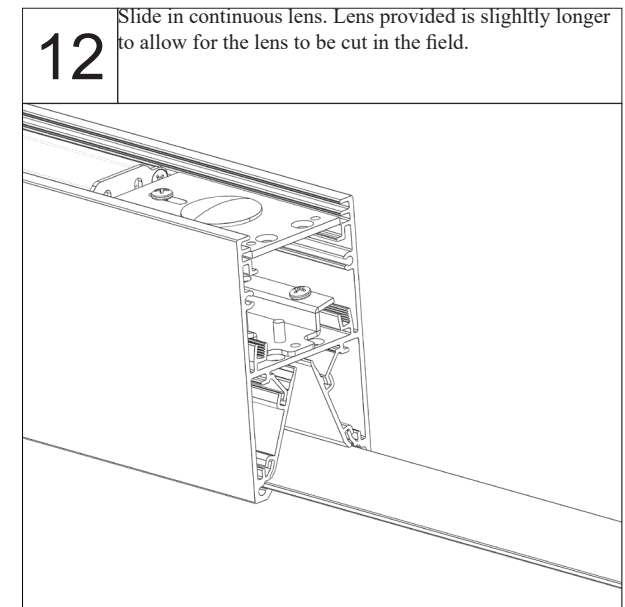


INSTALLATION INSTRUCTIONS

Continuous Pendant Mount Cont. (ACxxx)


- 13** Slide lens cutting guide over extra length of lens and secure with 2 screws. Don't over tighten screws as the slots are used for the end cap.

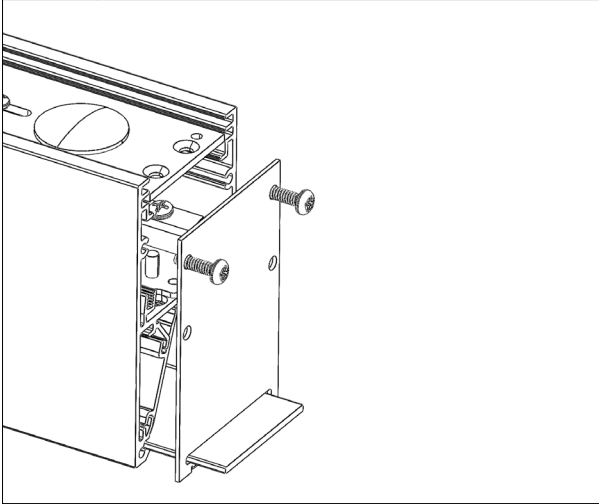


- 14** Scribe lens multiple times min of (10X). Apply pressure in upward direction to detach extra lens material. Remove lens cutting guide.

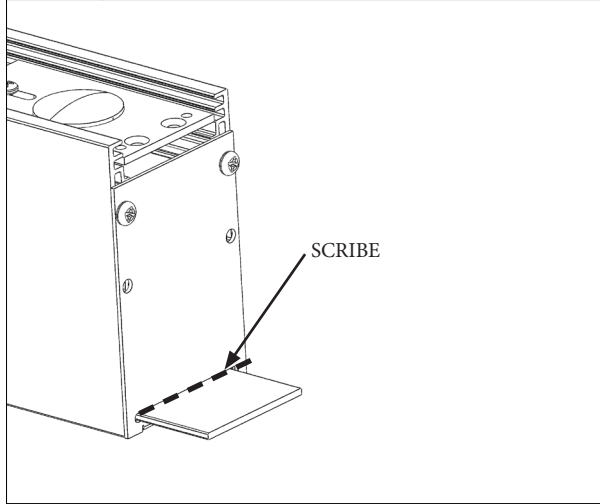

- 15** Install end cap with gasket on the end fixture with 2 screws.






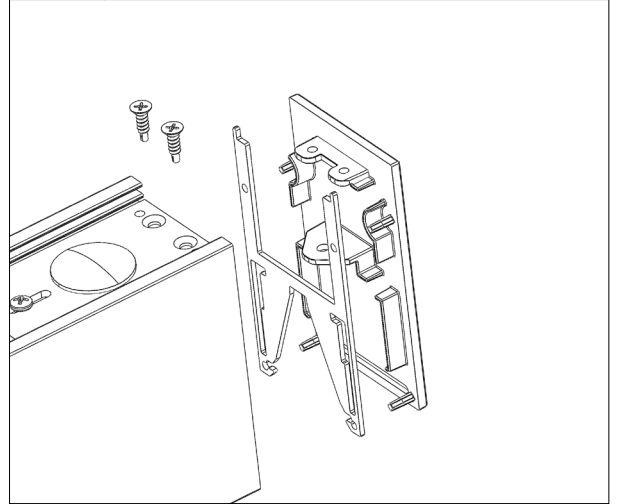


- 16** Restore power

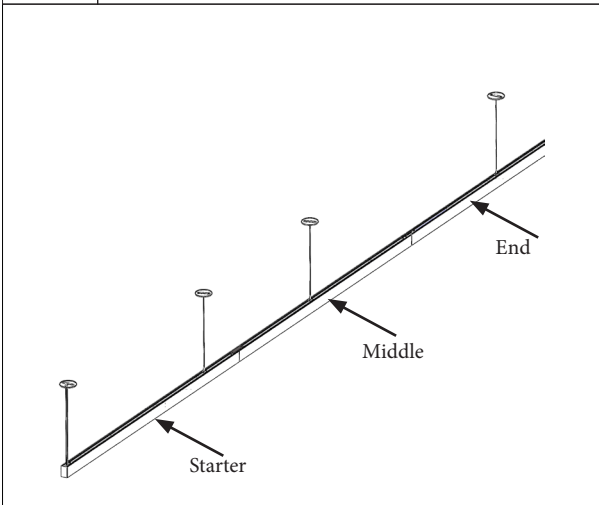







INSTALLATION INSTRUCTIONS

Individual Wall Mount (WM)

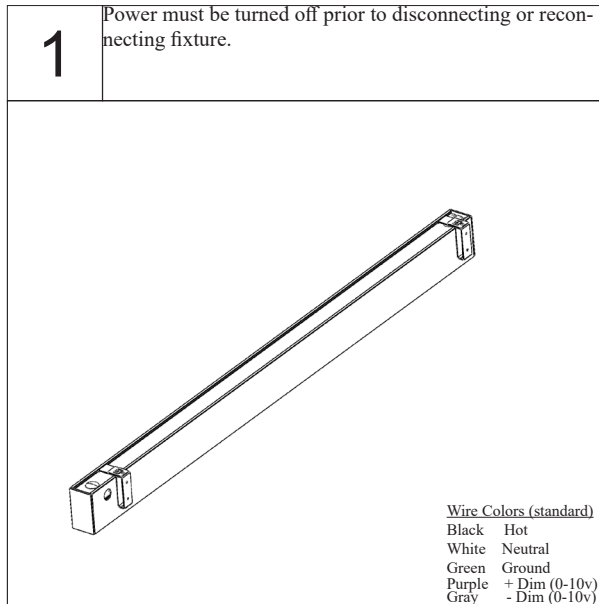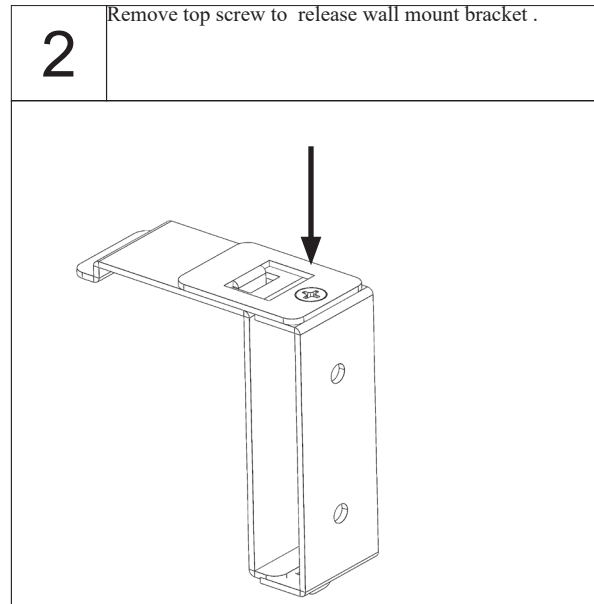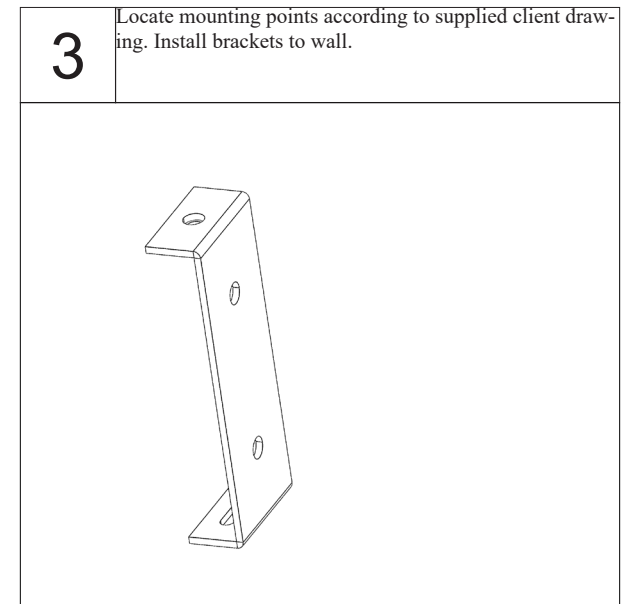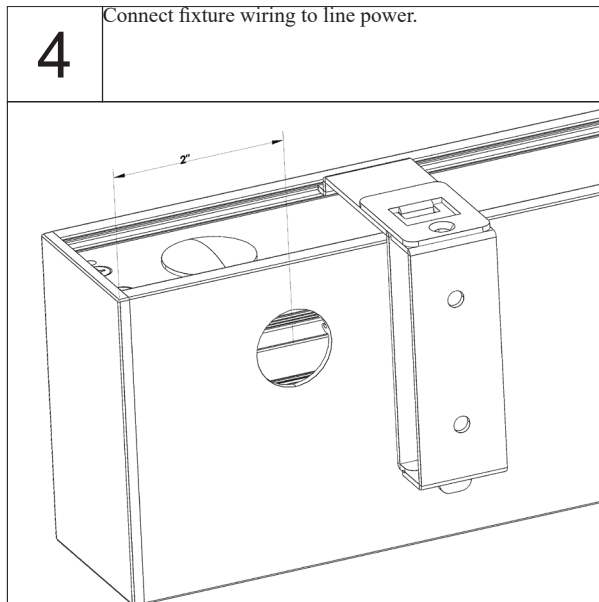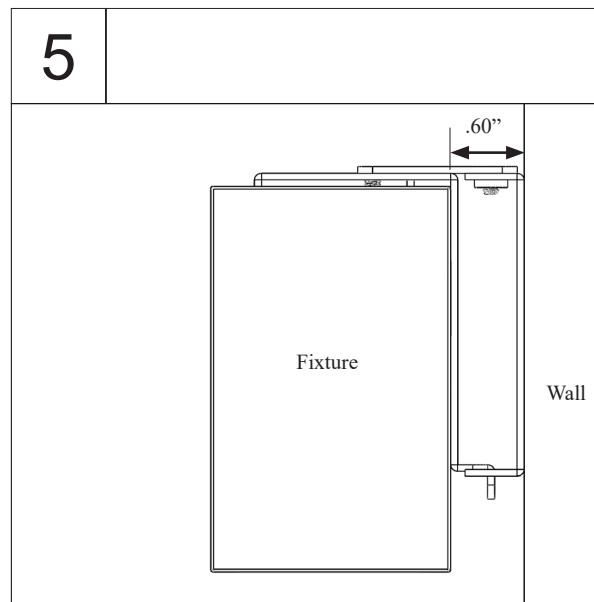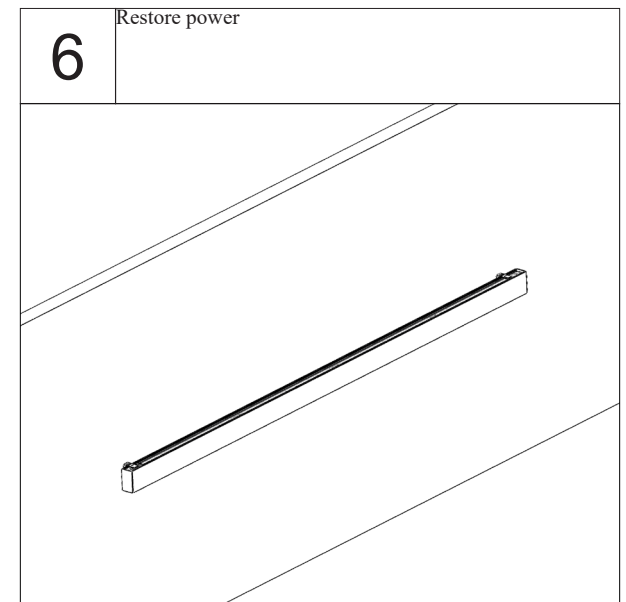







INSTALLATION INSTRUCTIONS

Continuous Wall Mount (WM)

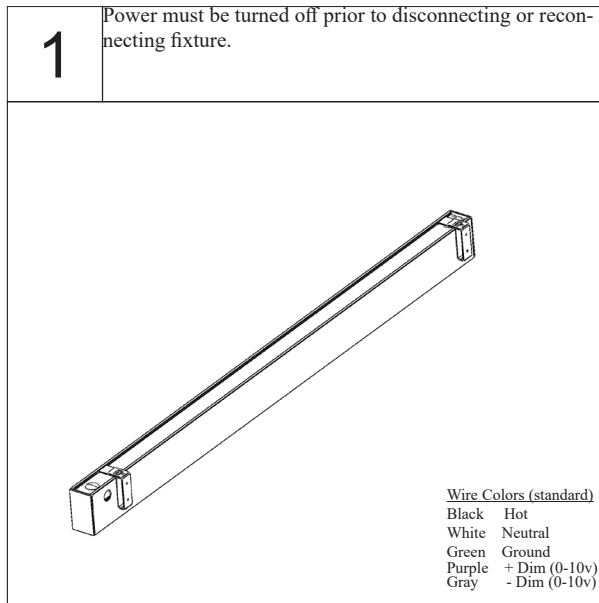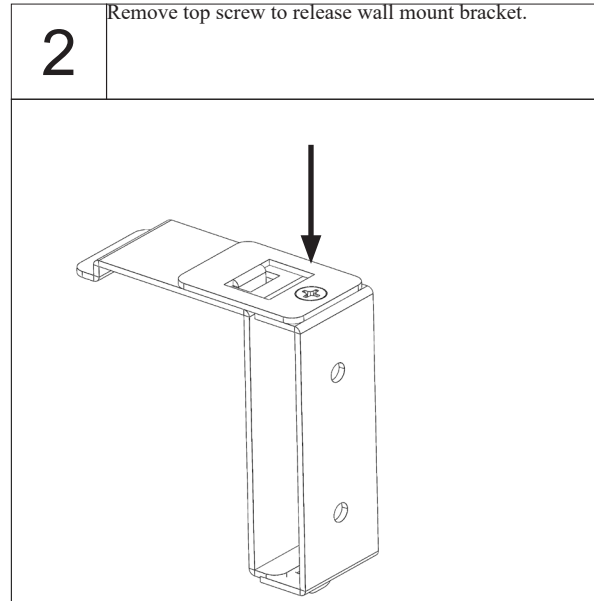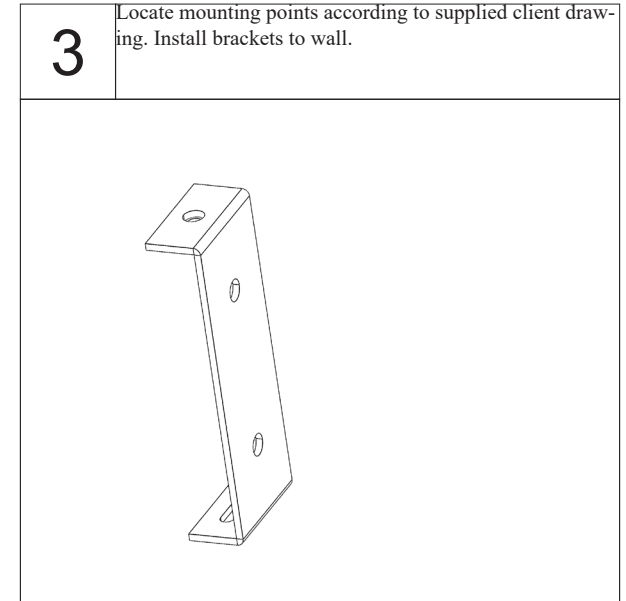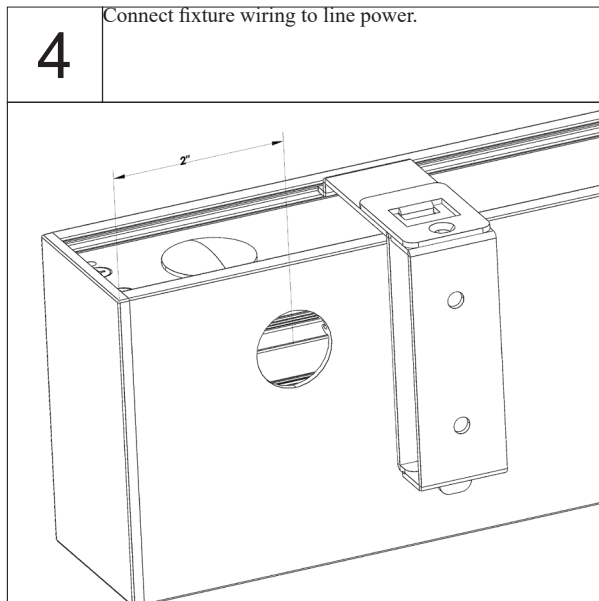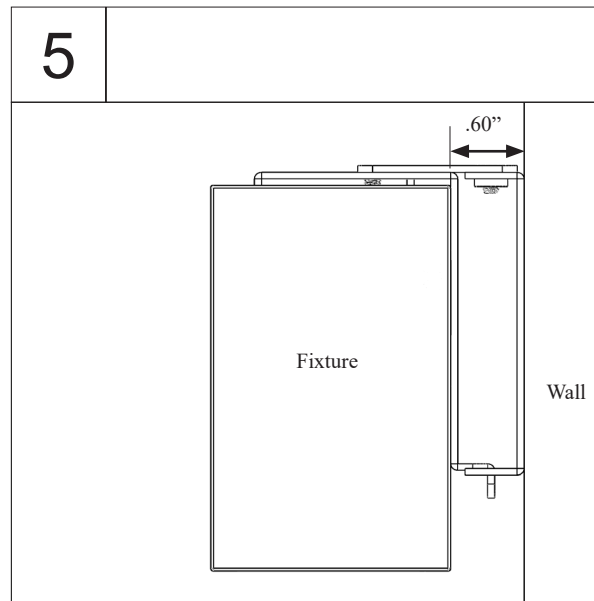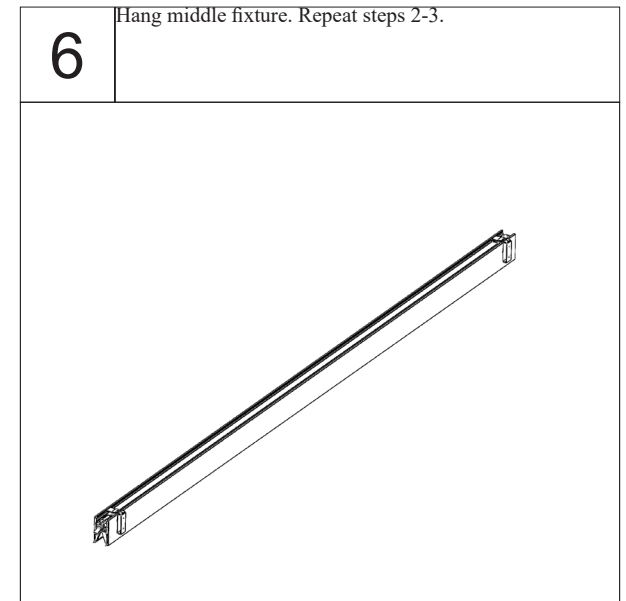

INSTALLATION INSTRUCTIONS


Continuous Wall Mount Cont. (WM)

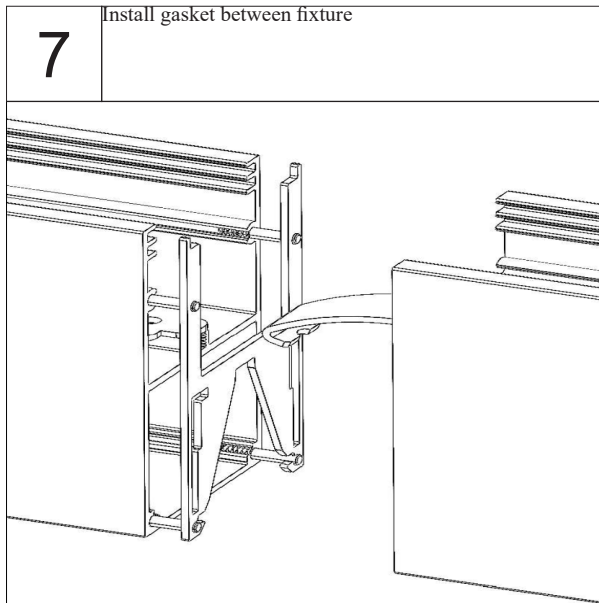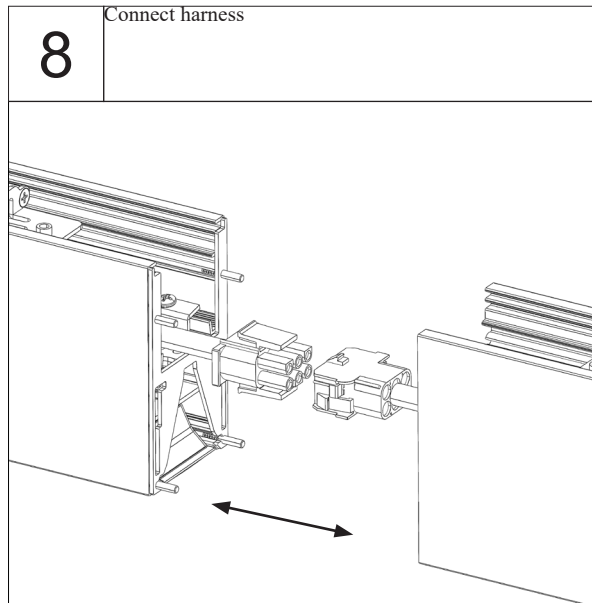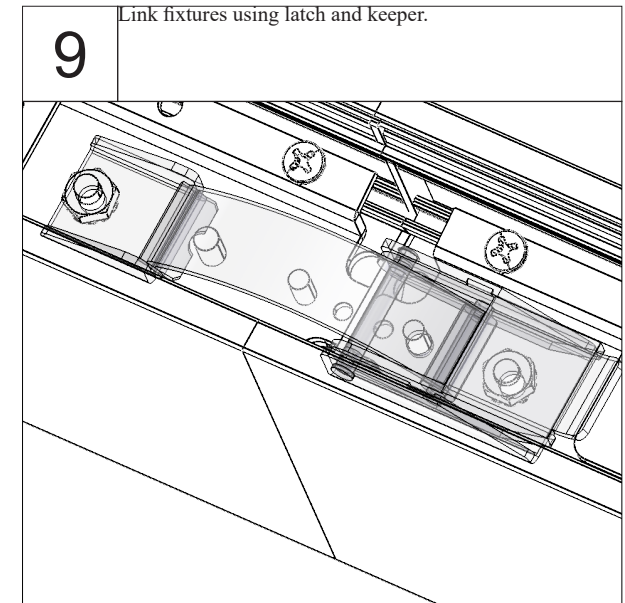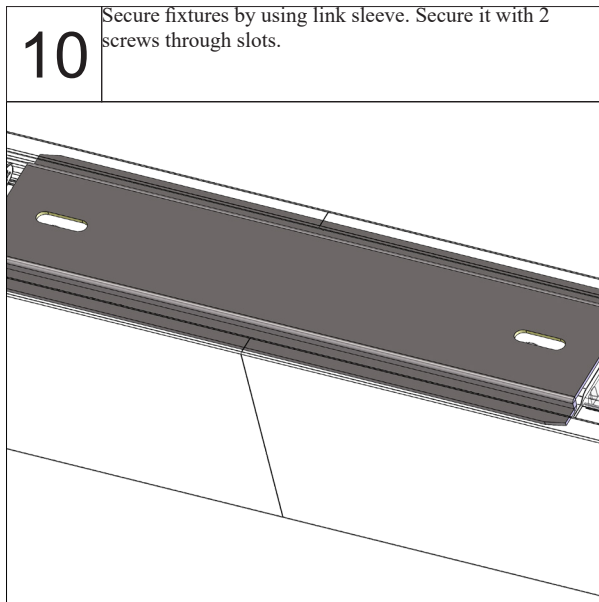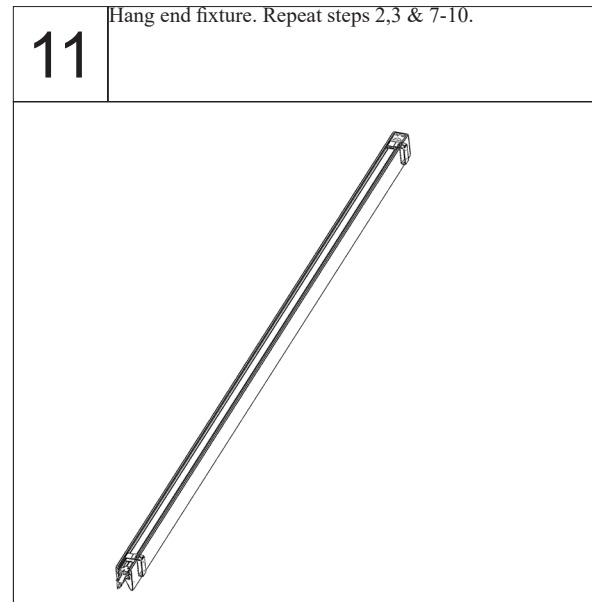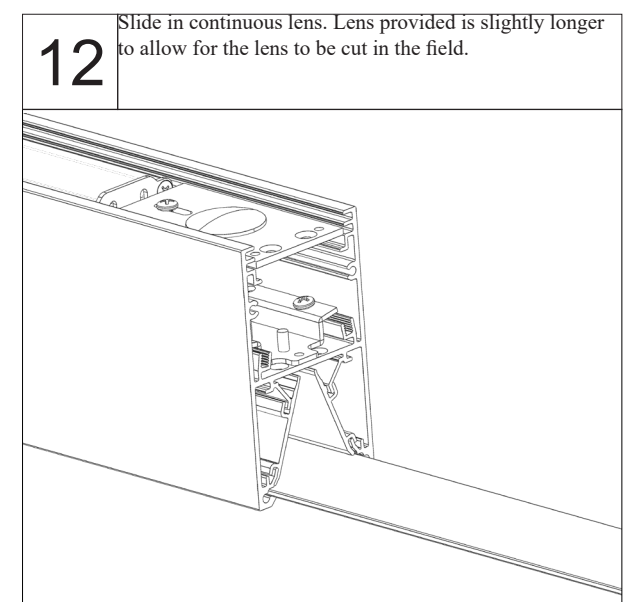


INSTALLATION INSTRUCTIONS

Continuous Wall Mount Cont. (WM)


13 Slide lens cutting guide over extra length of lens and secure with 2 screws. Don't over tighten screws as the slots are used for the end cap.

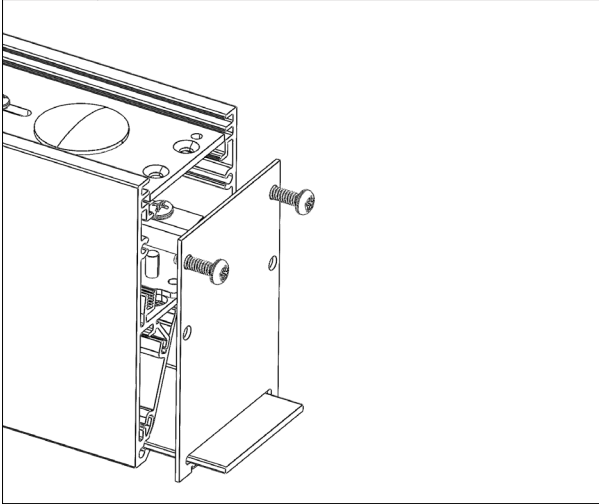


14 Scribe lens multiple times min of (10X). Apply pressure in upward direction to detach extra lens material. Remove lens cutting guide.

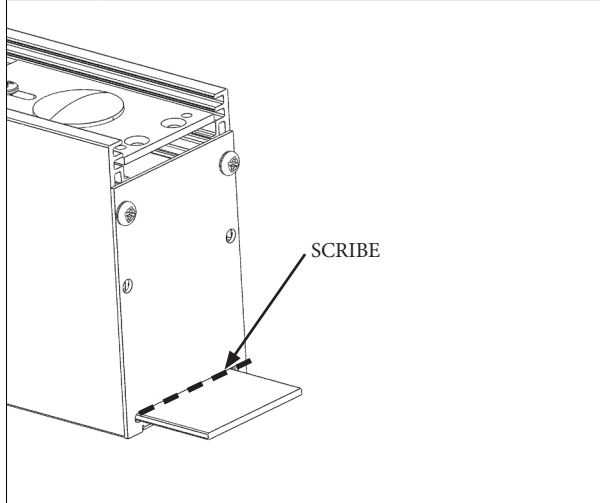

15 Install end cap with gasket on the end fixture with 2 screws.





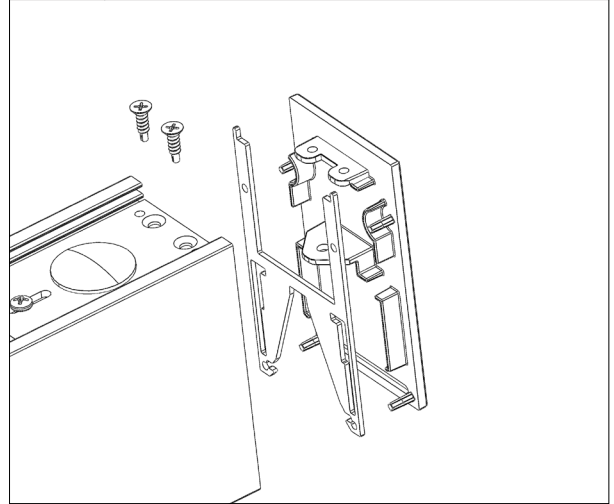


16 Restore power

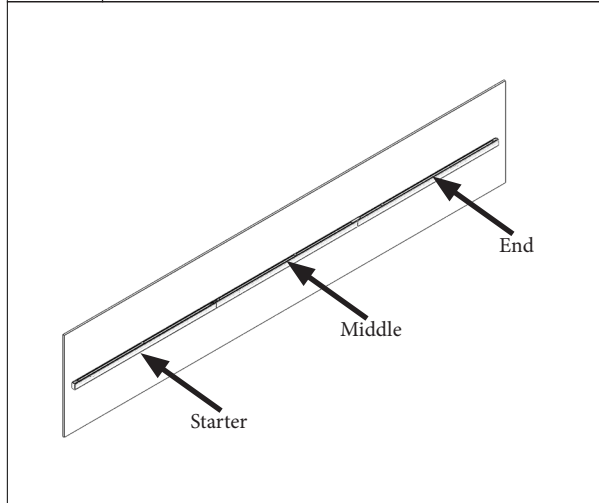






INSTALLATION INSTRUCTIONS

Individual Architectural Wall Mount (AWM)

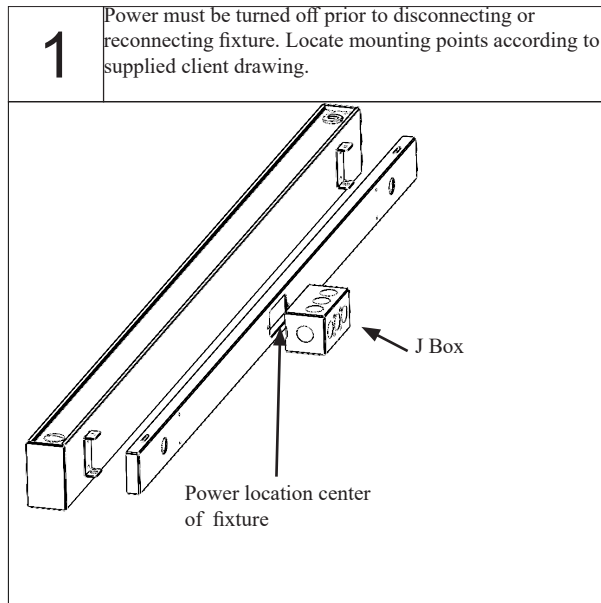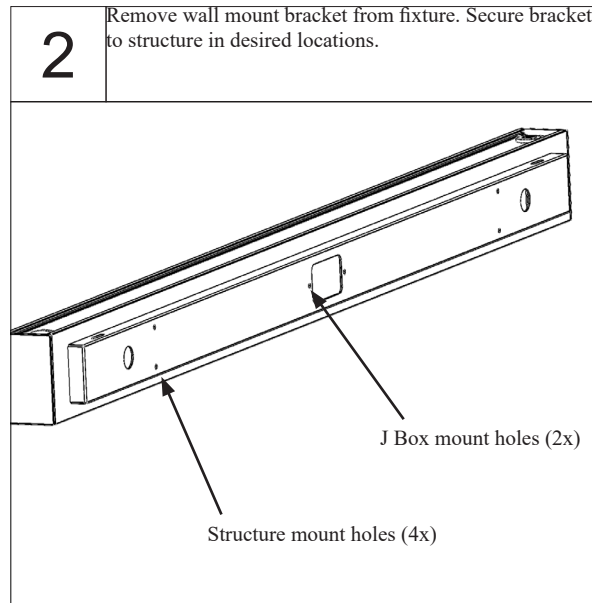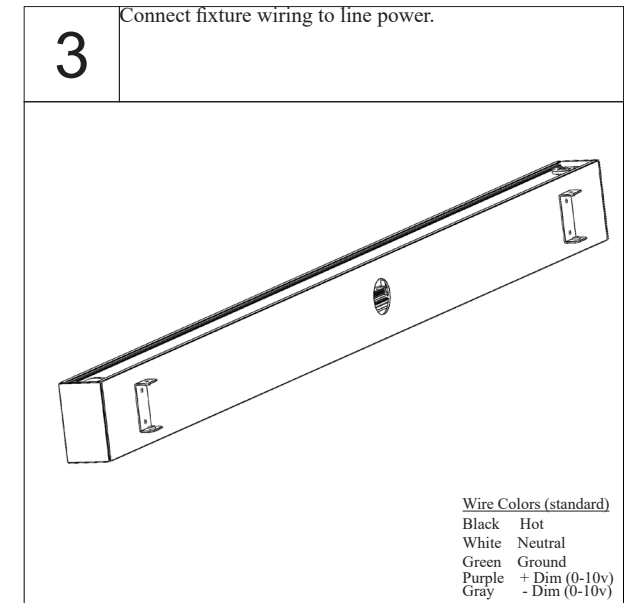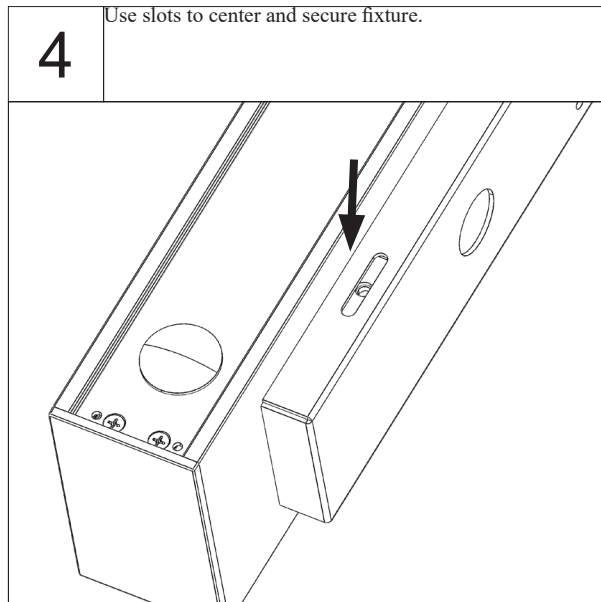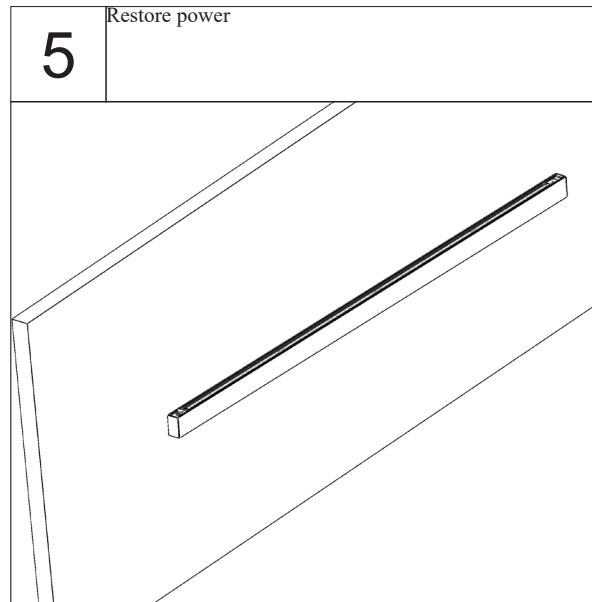







INSTALLATION INSTRUCTIONS

Continuous Architectural Wall Mount (AWM)
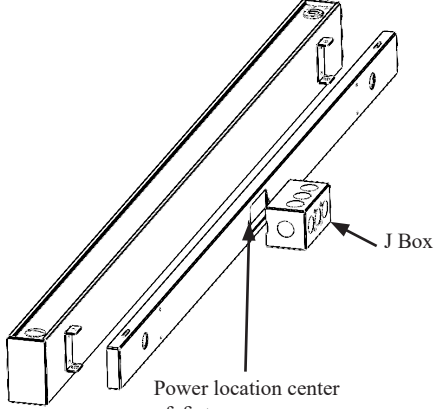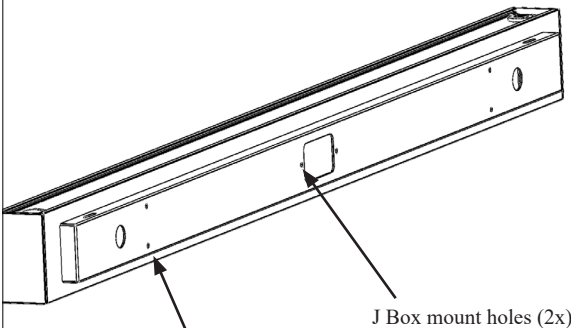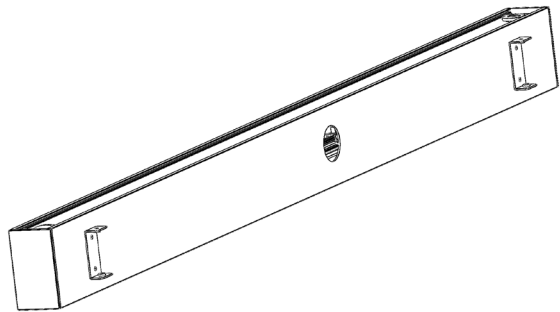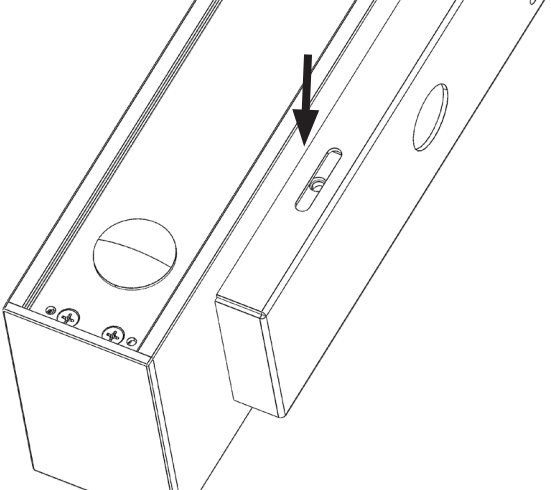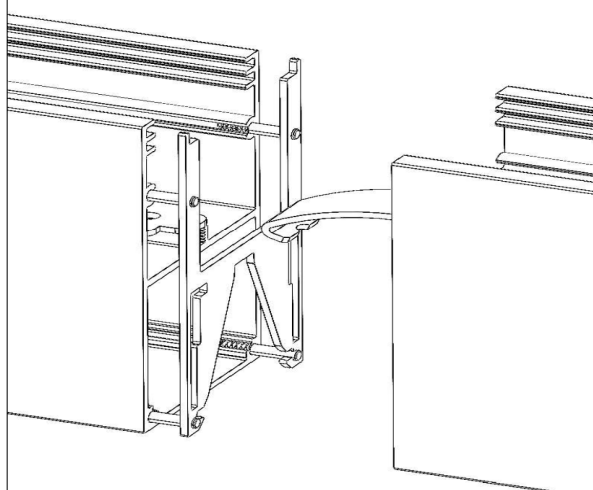
<p>1</p> <p>Power must be turned off prior to disconnecting or reconnecting fixture. Locate mounting points according to supplied client drawing.</p>	<p>2</p> <p>Remove wall mount bracket from fixture. Secure bracket to structure in desired locations.</p>	<p>3</p> <p>Connect fixture wiring to line power.</p>										
 <p>J Box</p> <p>Power location center of fixture</p>	 <p>J Box mount holes (2x)</p> <p>Structure mount holes (4x)</p>	 <p>Wire Colors (standard)</p> <table border="0"> <tr> <td>Black</td> <td>Hot</td> </tr> <tr> <td>White</td> <td>Neutral</td> </tr> <tr> <td>Green</td> <td>Ground</td> </tr> <tr> <td>Purple</td> <td>+ Dim (0-10v)</td> </tr> <tr> <td>Gray</td> <td>- Dim (0-10v)</td> </tr> </table>	Black	Hot	White	Neutral	Green	Ground	Purple	+ Dim (0-10v)	Gray	- Dim (0-10v)
Black	Hot											
White	Neutral											
Green	Ground											
Purple	+ Dim (0-10v)											
Gray	- Dim (0-10v)											
<p>4</p> <p>Use slots to center and secure fixture.</p>	<p>5</p> <p>Hang middle fixture. Locate mounting points according to supplied client drawing. Repeat steps 2&4.</p>	<p>6</p> <p>Install gasket between fixture</p>										
												

INSTALLATION INSTRUCTIONS


Continuous Architectural Wall Mount Cont. (AWM)

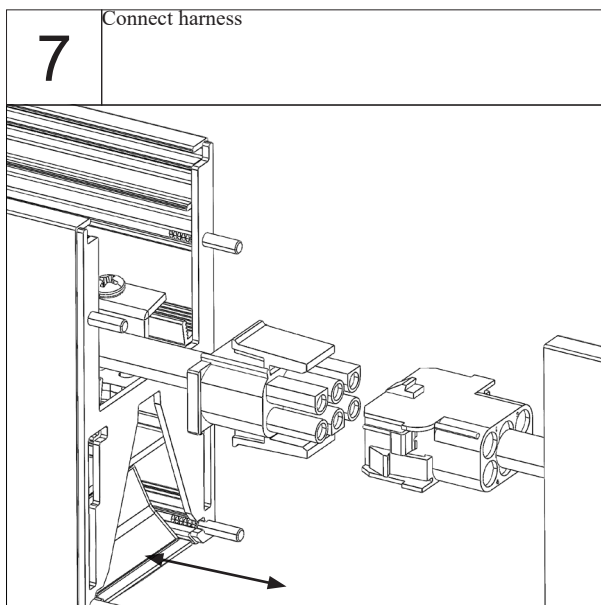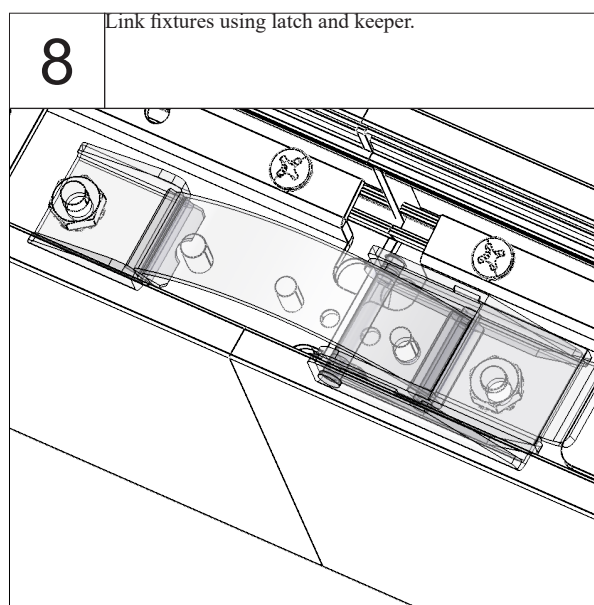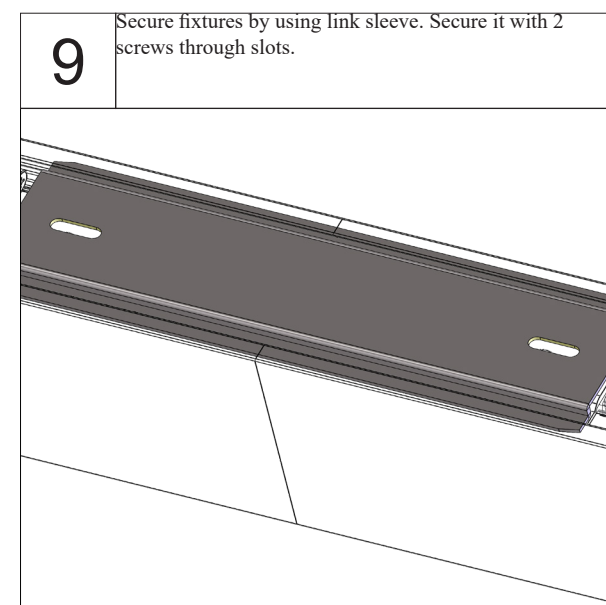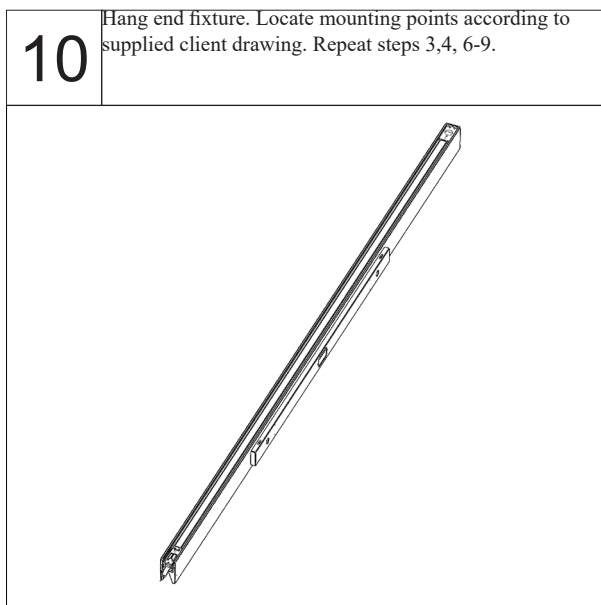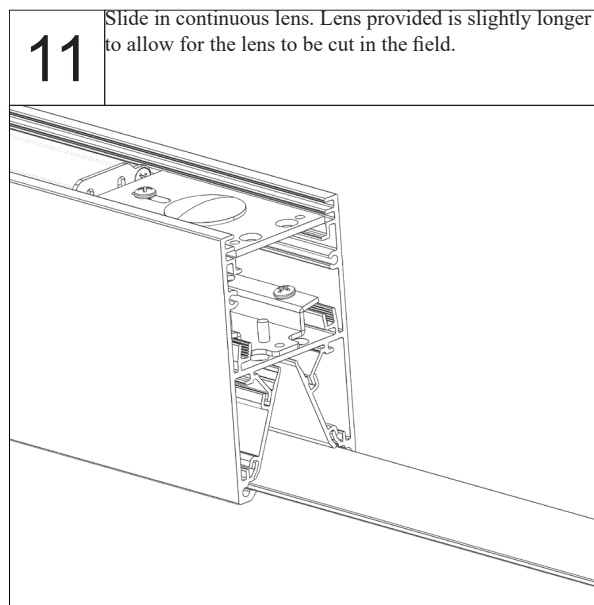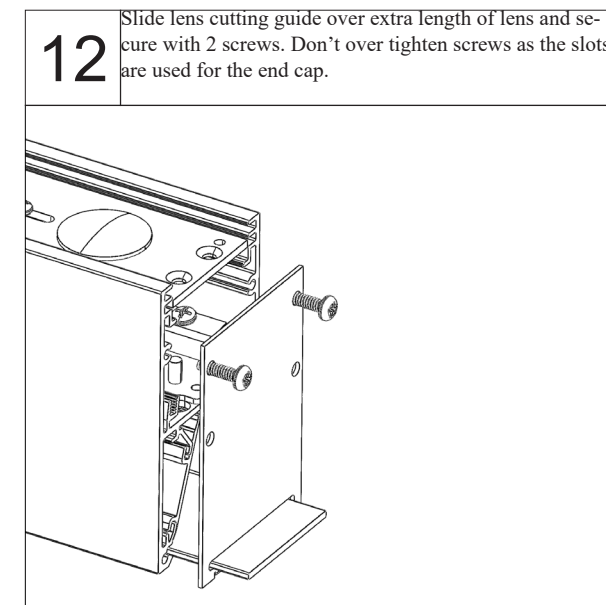


INSTALLATION INSTRUCTIONS

Continuous Architectural Wall Mount Cont. (AWM)


13 Scribe lens multiple times min of (10X). Apply pressure in upward direction to detach extra lens material. Remove lens cutting guide.

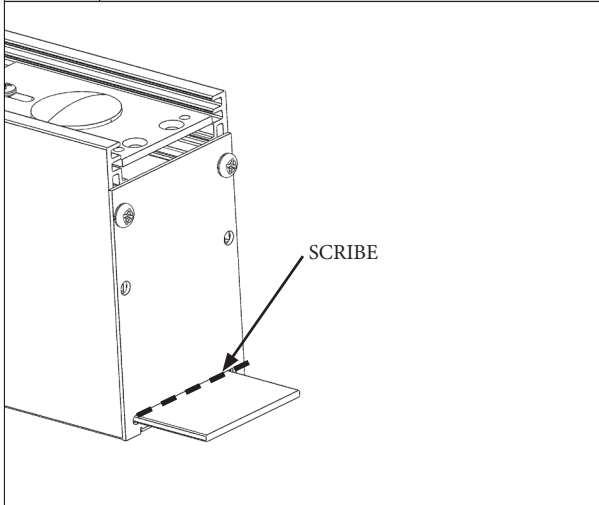

14 Install end cap with gasket on the end fixture with 2 screws.





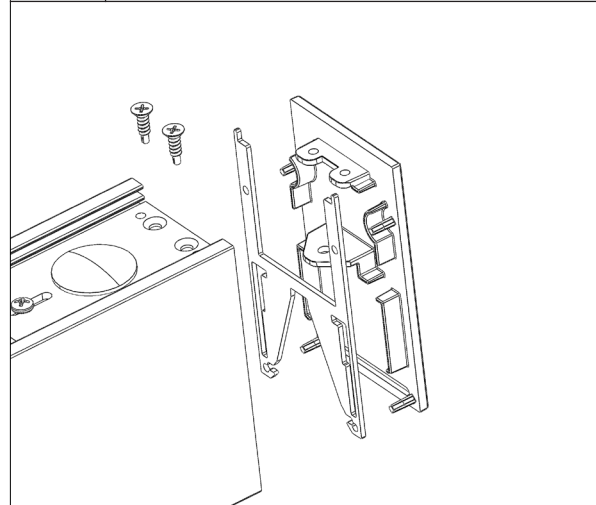


15 Restore power

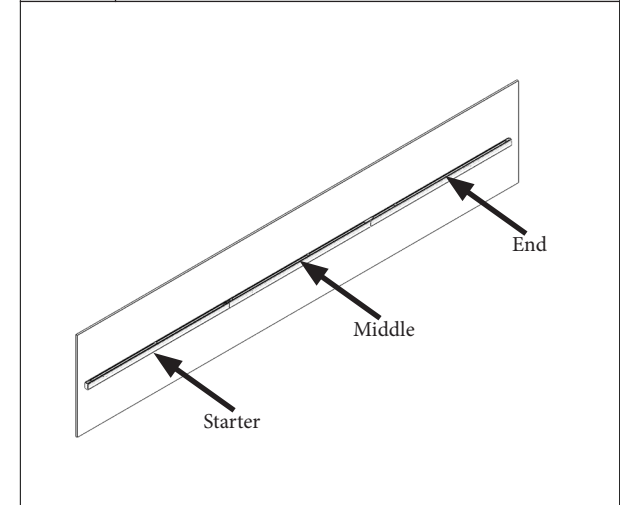

INSTALLATION INSTRUCTIONS

Extruded Wall Mount, Individual (EWM)

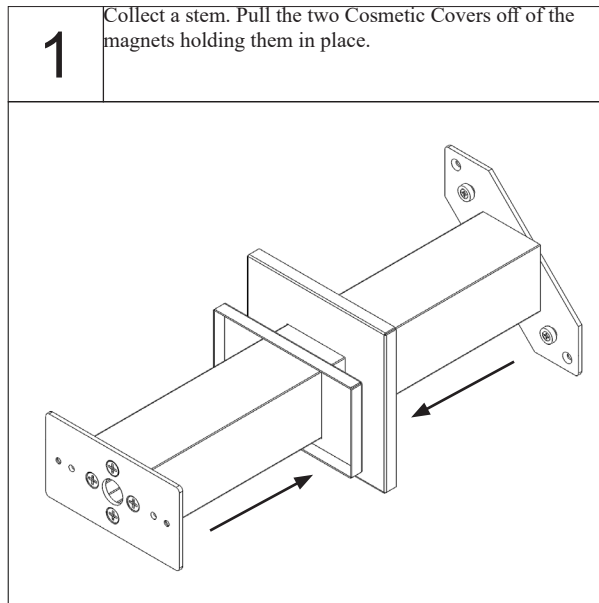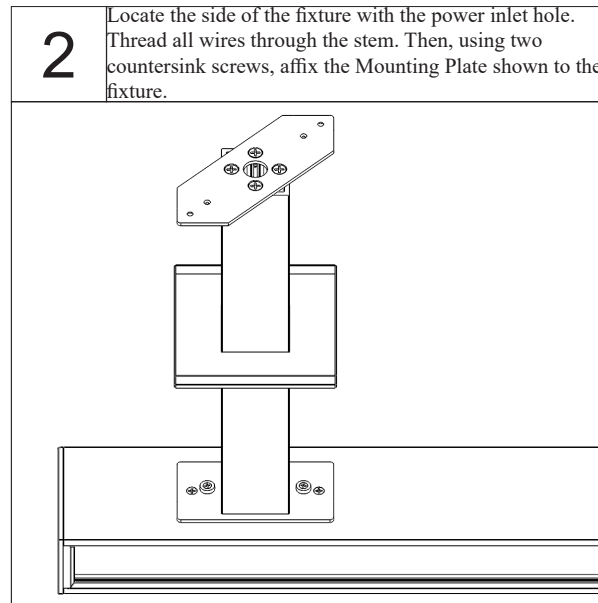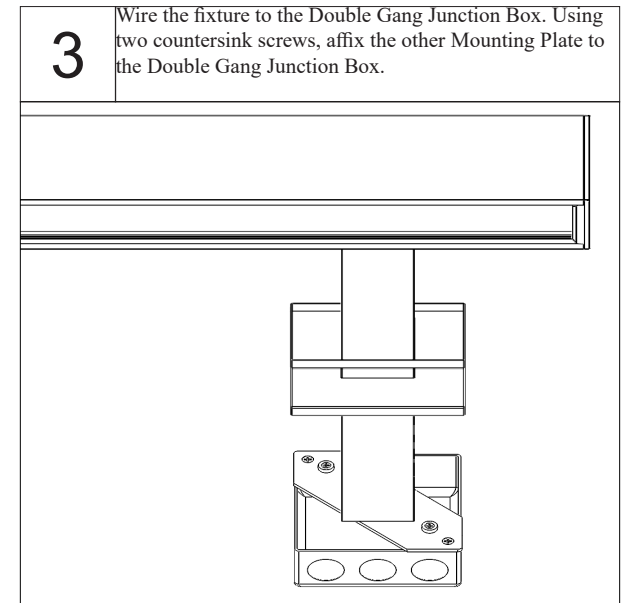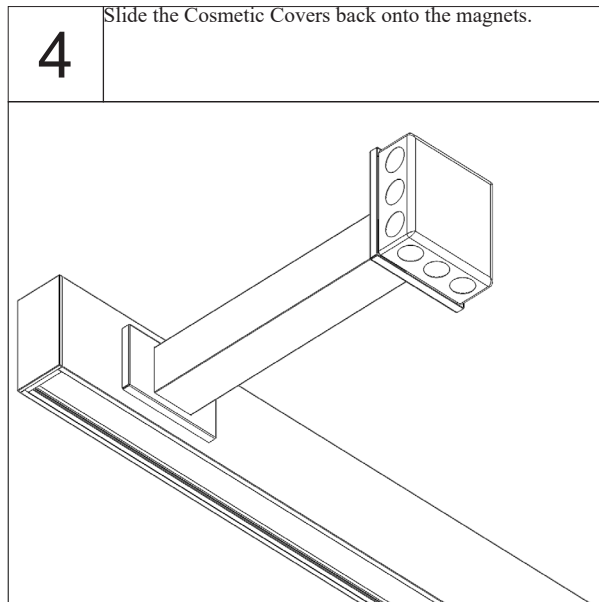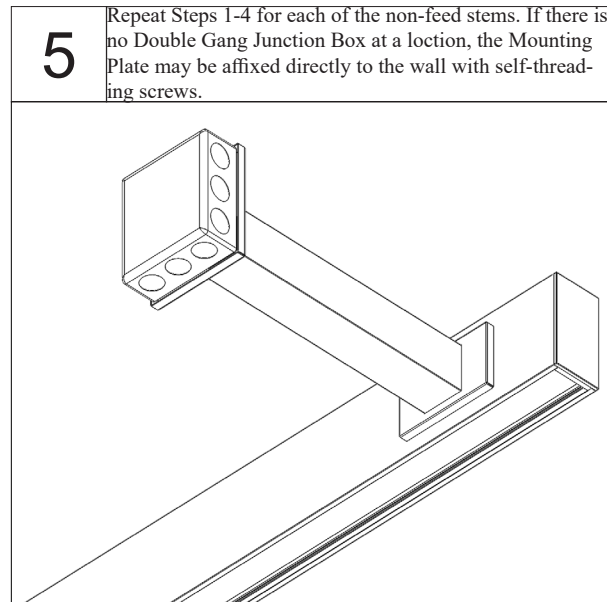


INSTALLATION INSTRUCTIONS

Extruded Wall Mount, Continuous (EWM)


1

Collect a stem. Pull the two Cosmetic Covers off of the magnets holding them in place.

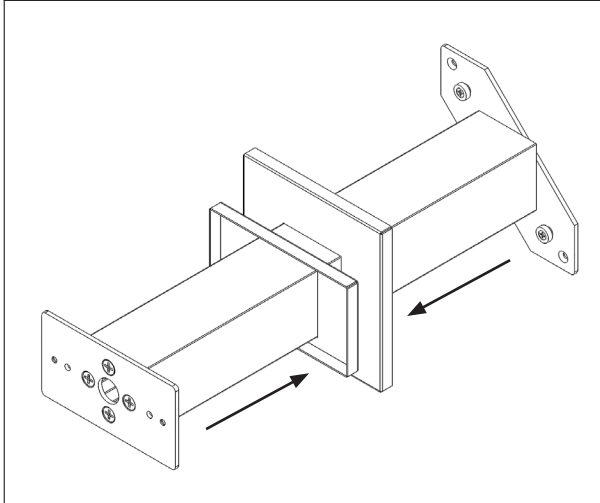


2

Locate the side of the fixture with the power inlet hole. Thread all wires through the stem. Then, using two countersink screws, affix the Mounting Plate shown to the fixture.

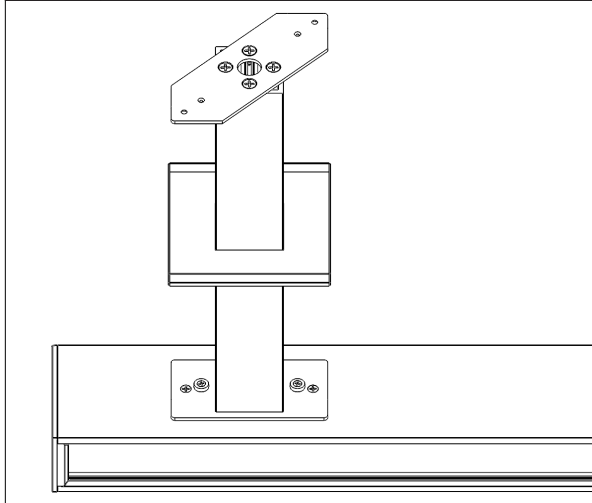


3

Wire the fixture to the Double Gang Junction Box. Using two countersink screws, affix the other Mounting Plate to the Double Gang Junction Box.

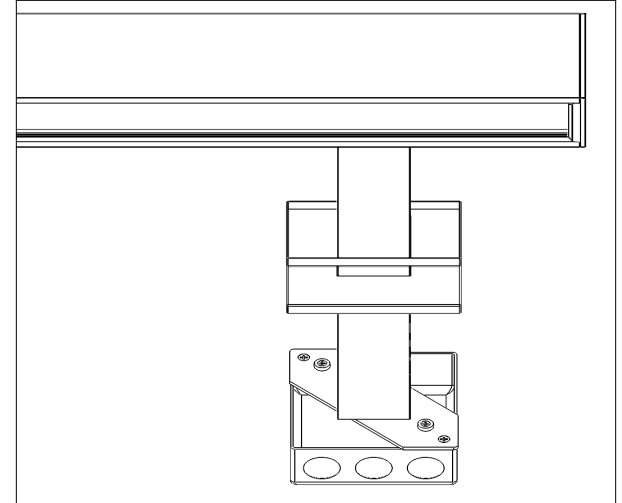


4

Install gaskets between fixtures.

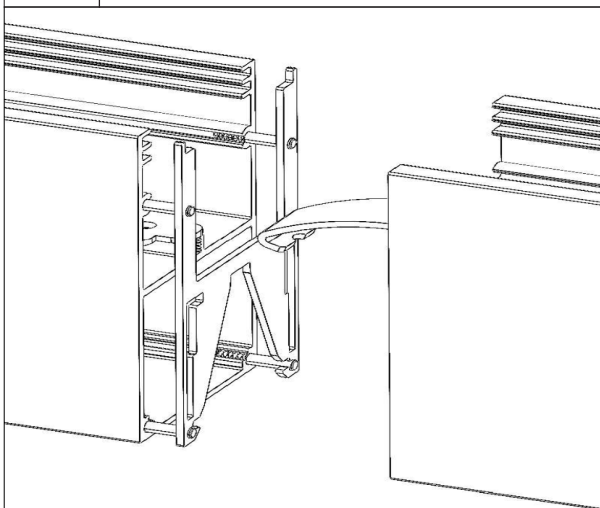


5

Connect harness

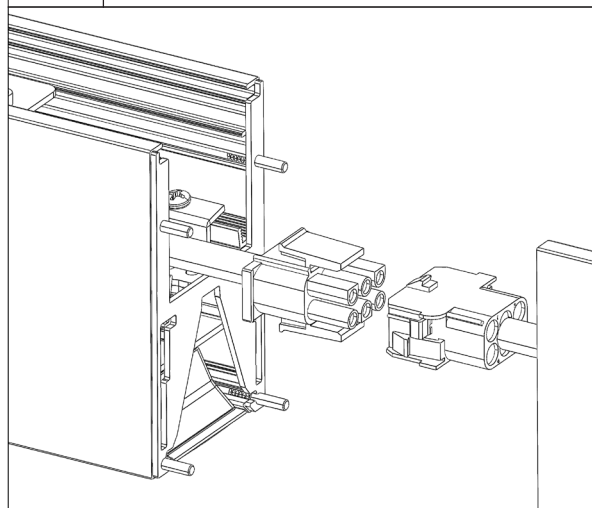







6

Link fixtures using latch and keeper.

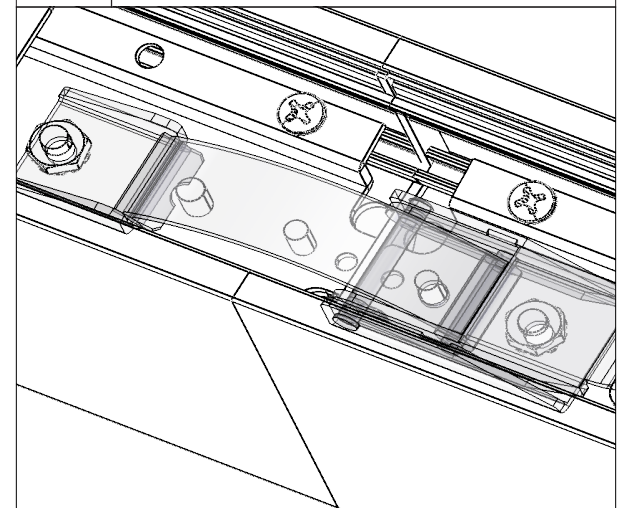




INSTALLATION INSTRUCTIONS

Extruded Wall Mount, Continuous (EWM)

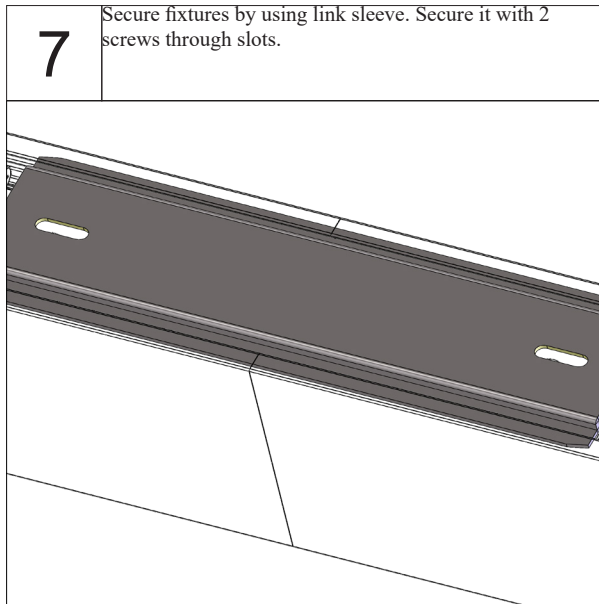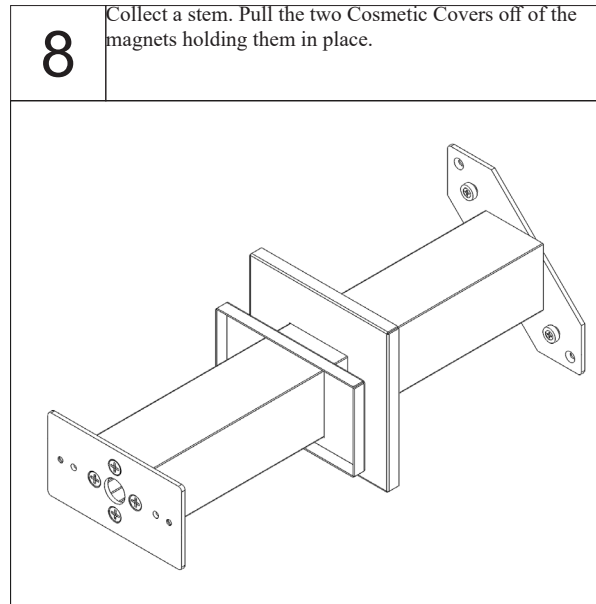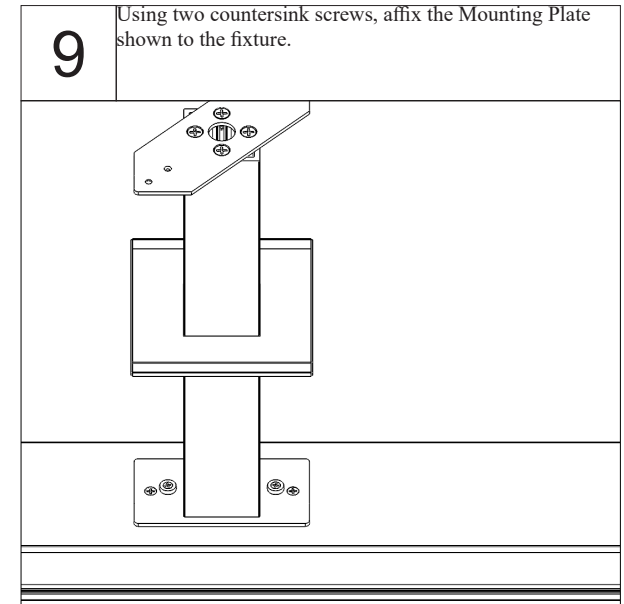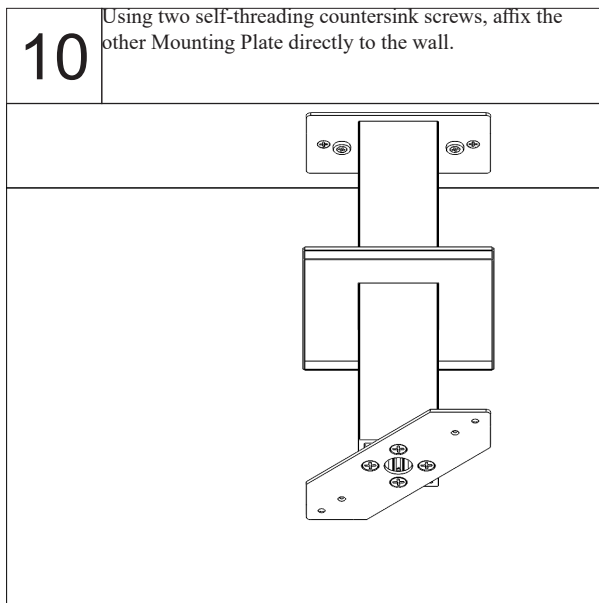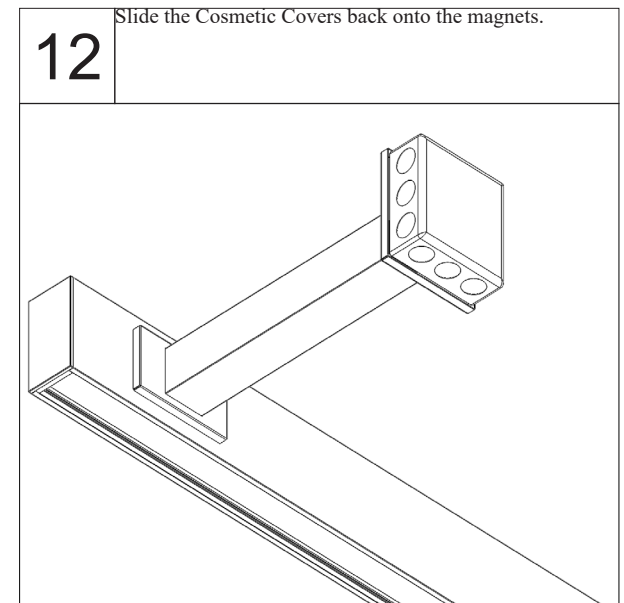







INSTALLATION INSTRUCTIONS

Extruded Wall Mount, Continuous (EWM)

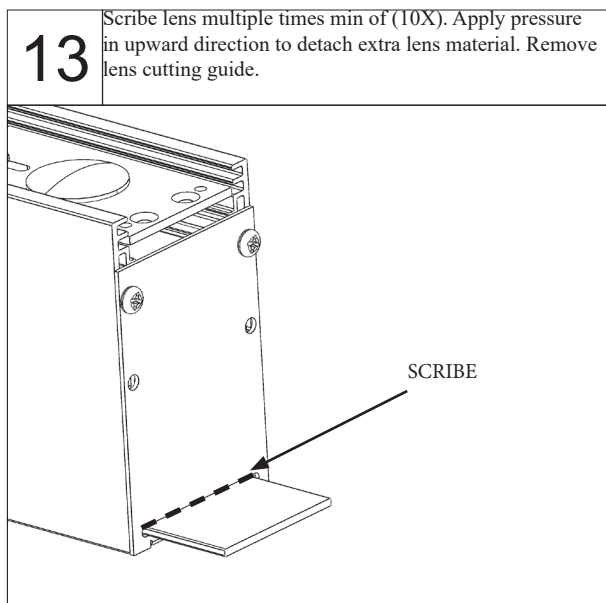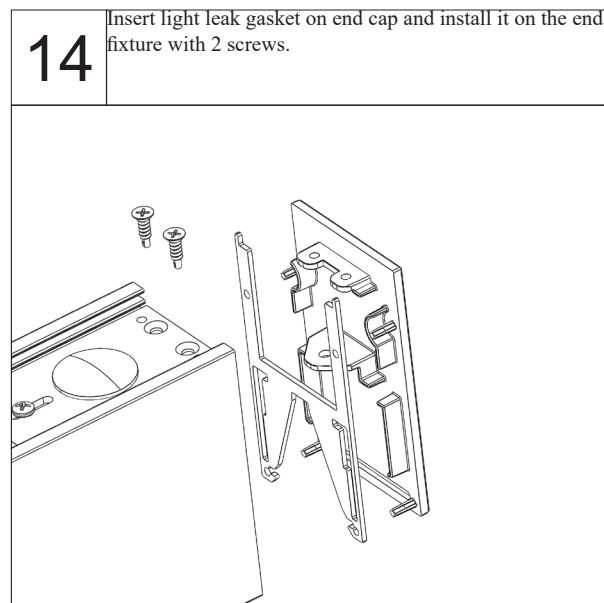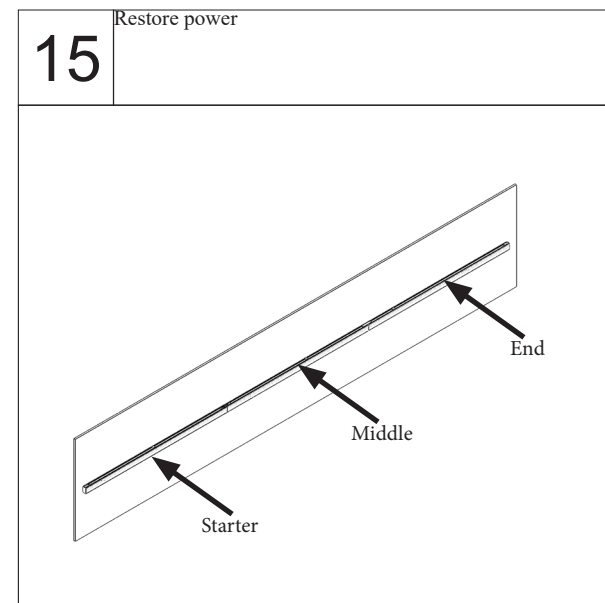







INSTALLATION INSTRUCTIONS

Individual Stem With Canopy (STEMxxxx)

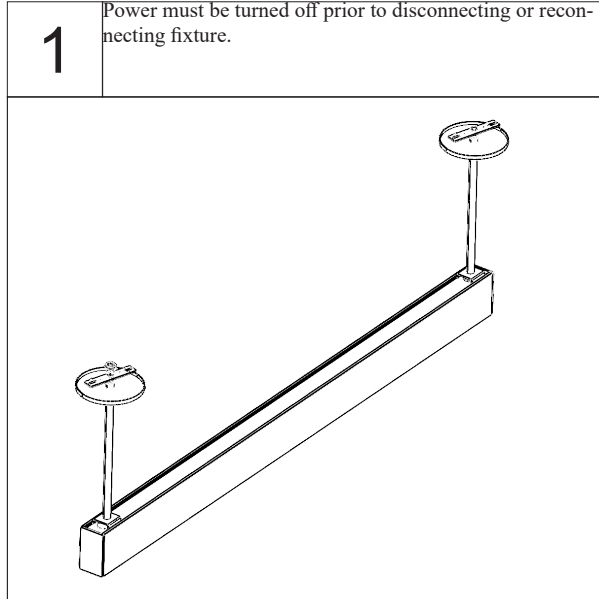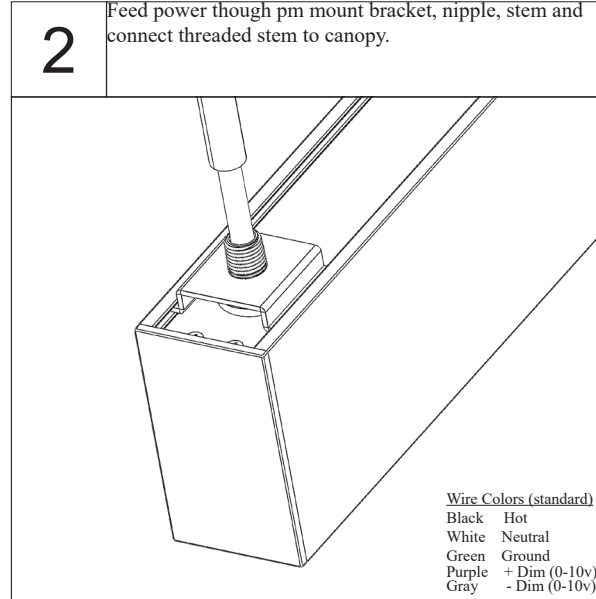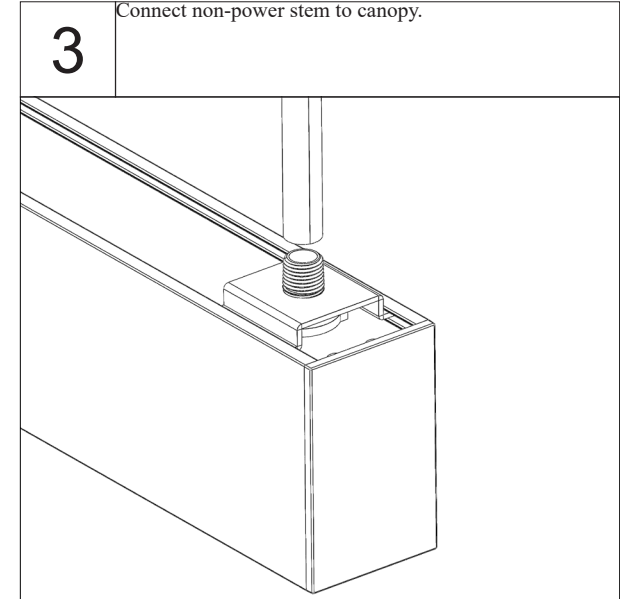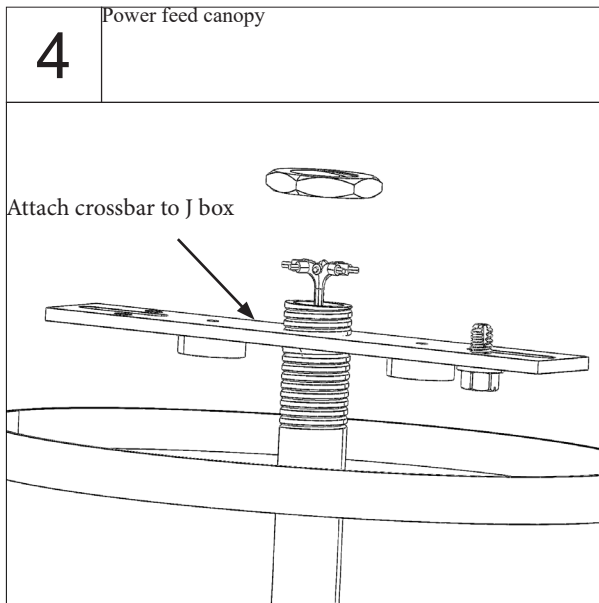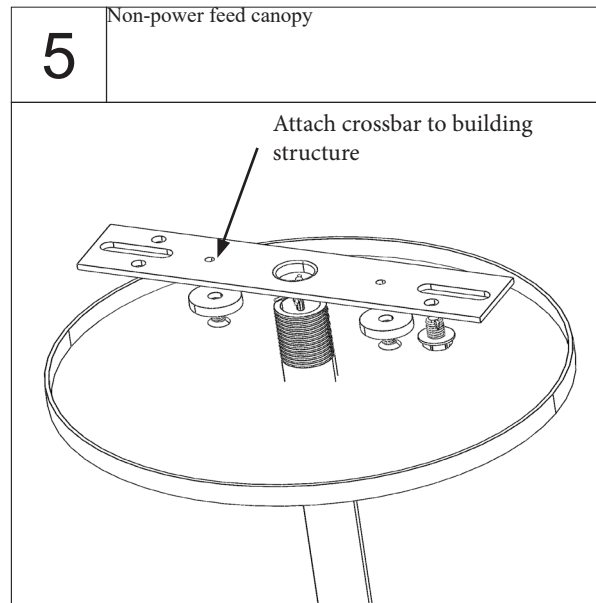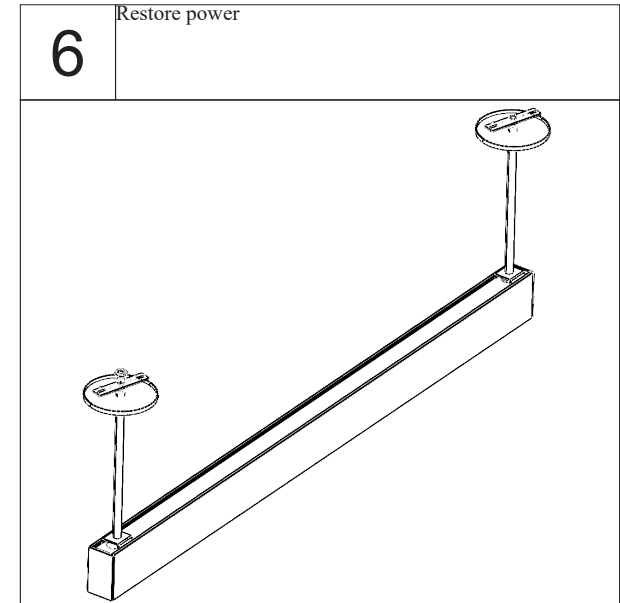







INSTALLATION INSTRUCTIONS

Continuous Stem With Canopy (STEMxxx)
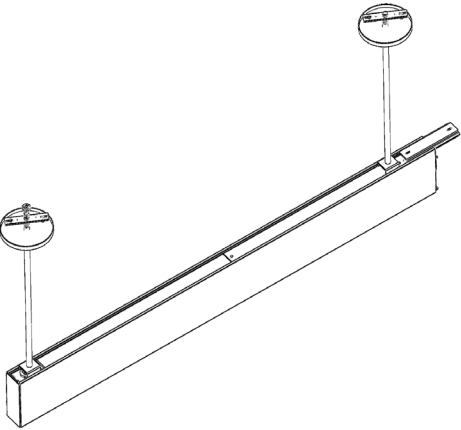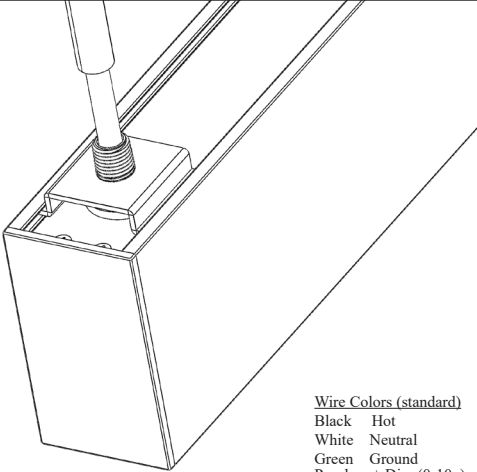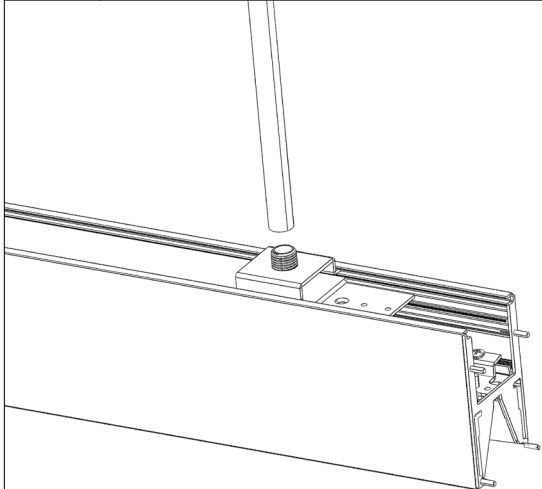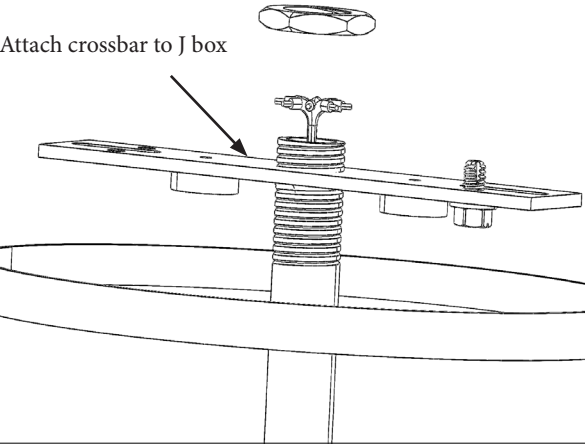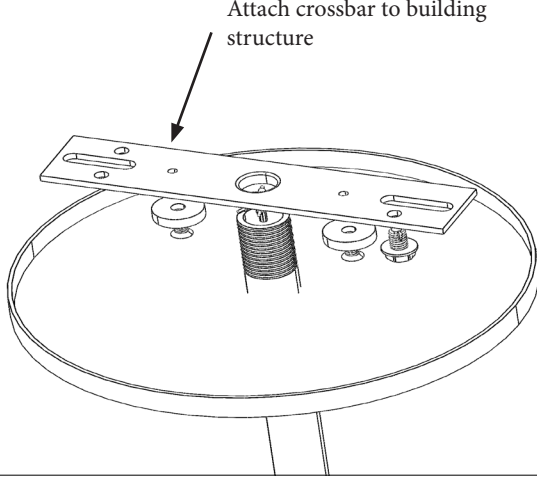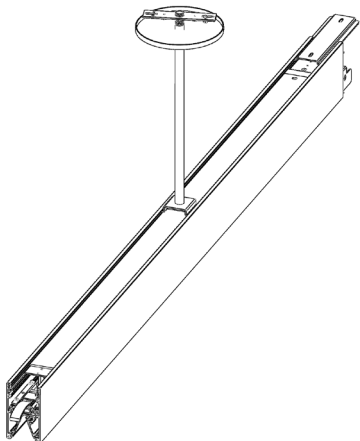
<p>1</p>	<p>Power must be turned off prior to disconnecting or reconnecting fixture.</p>	<p>2</p>	<p>Feed power through pm mount bracket, nipple, stem and connect threaded stem to canopy.</p>
	 <p>Wire Colors (standard) Black Hot White Neutral Green Ground Purple + Dim (0-10v) Gray - Dim (0-10v)</p>	<p>3</p> 	
<p>4</p>	<p>Power feed canopy</p>	<p>5</p>	<p>Non-power feed canopy</p>
 <p>Attach crossbar to J box</p>	 <p>Attach crossbar to building structure</p>	<p>6</p> 	<p>Hang middle fixture. Middle fixture has one mount which should not exceed 8' from the last mounting location of starting fixture. Repeat step 3&5.</p>

INSTALLATION INSTRUCTIONS


Continuous Stem With Canopy Cont. (STEMxxxx)

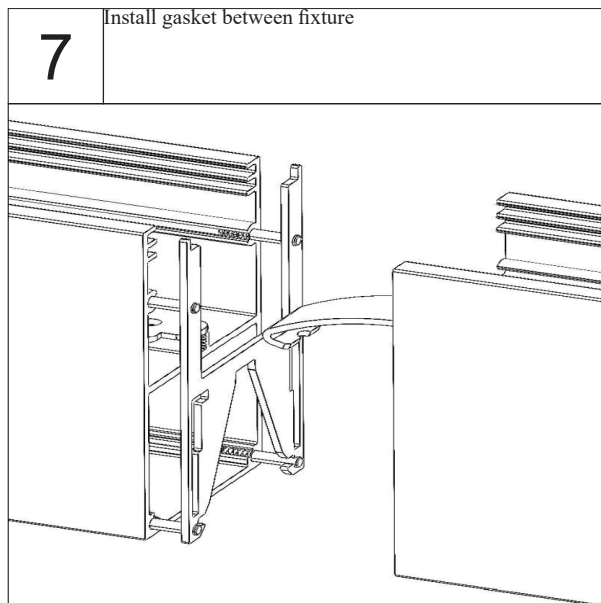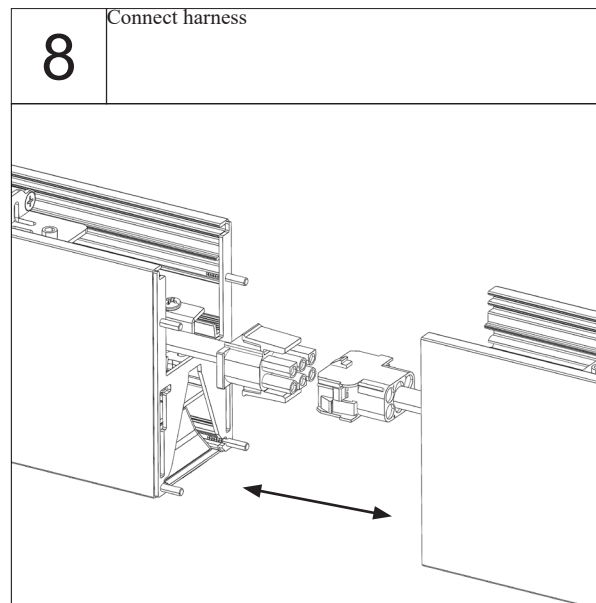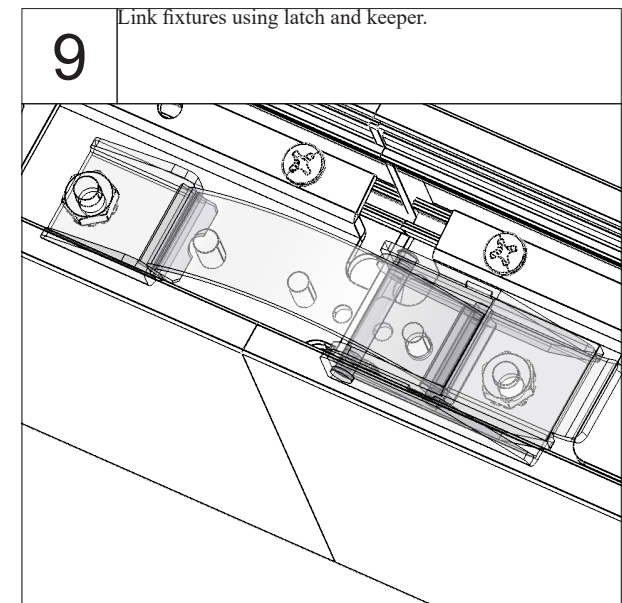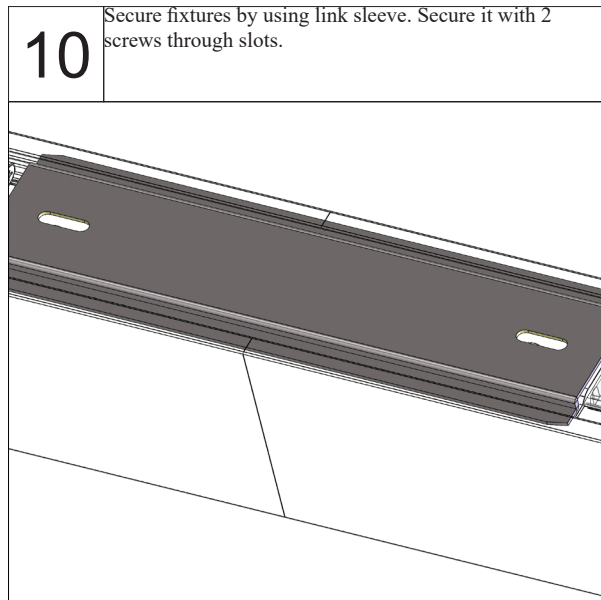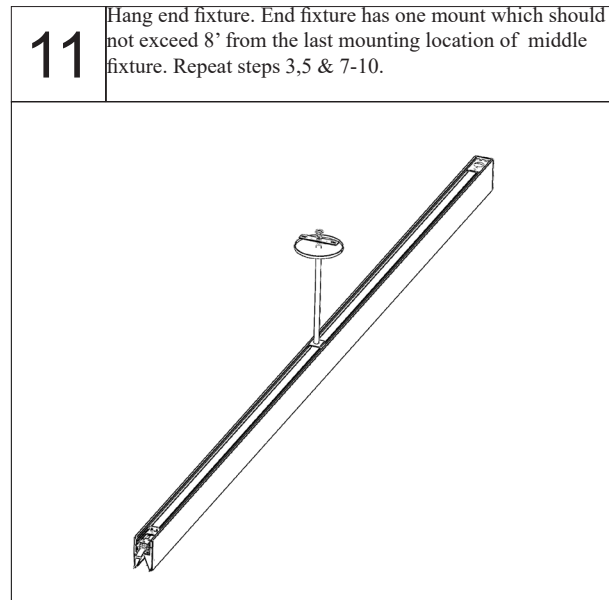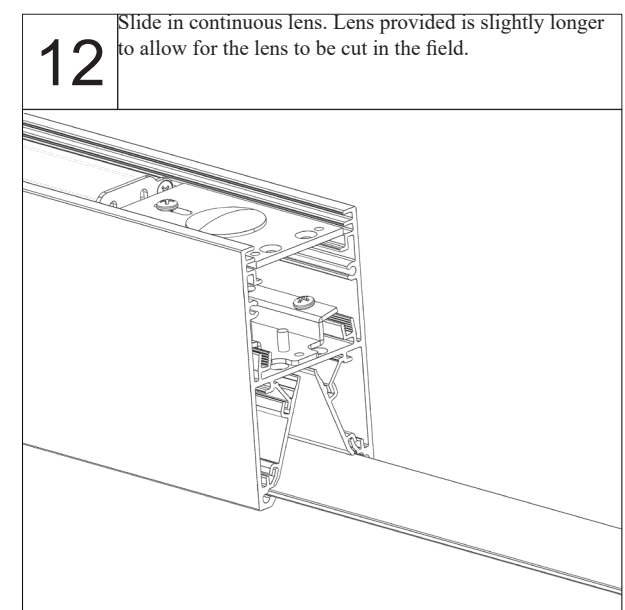


INSTALLATION INSTRUCTIONS

Continuous Stem With Canopy Cont. (STEMxxx)


13 Slide lens cutting guide over extra length of lens and secure with 2 screws. Don't over tighten screws as the slots are used for the end cap.

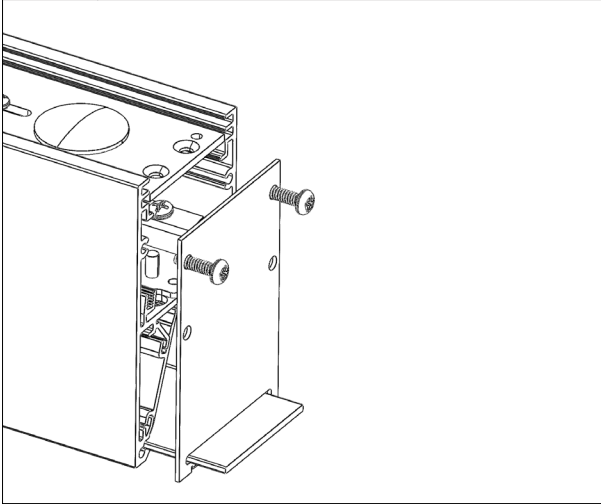


14 Scribe lens multiple times min of (10X). Apply pressure in upward direction to detach extra lens material. Remove lens cutting guide.

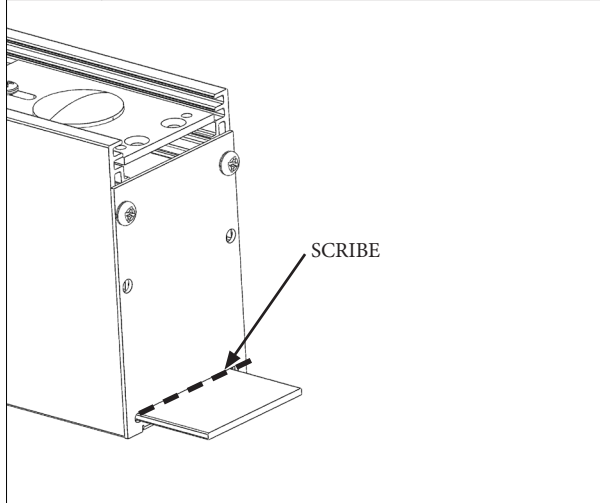

15 Insert end cap with gasket on the end fixture with 2 screws.

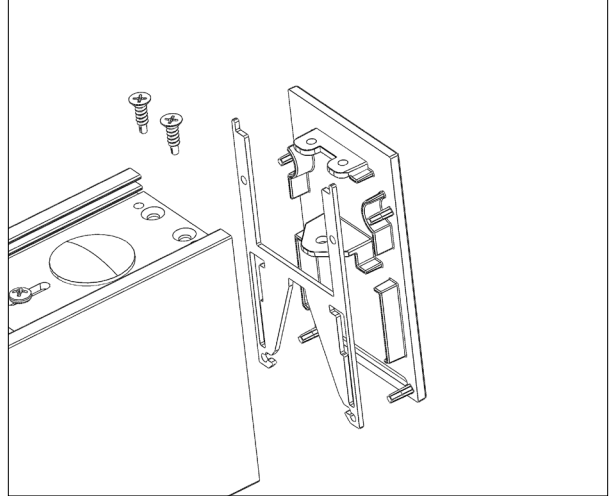


16 Restore power

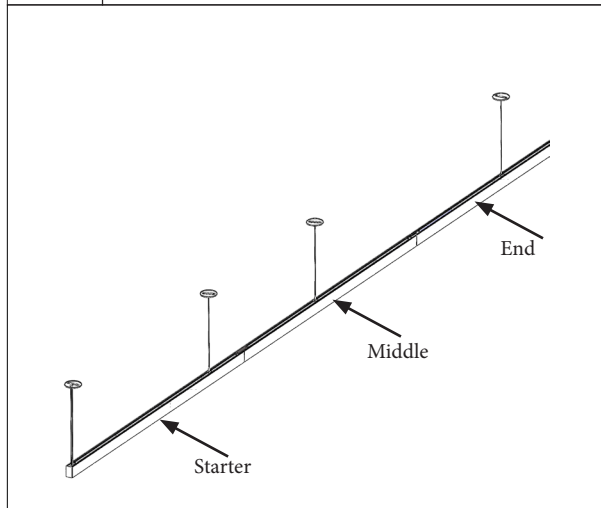


INSTALLATION INSTRUCTIONS

Joint Shape Configuration PM

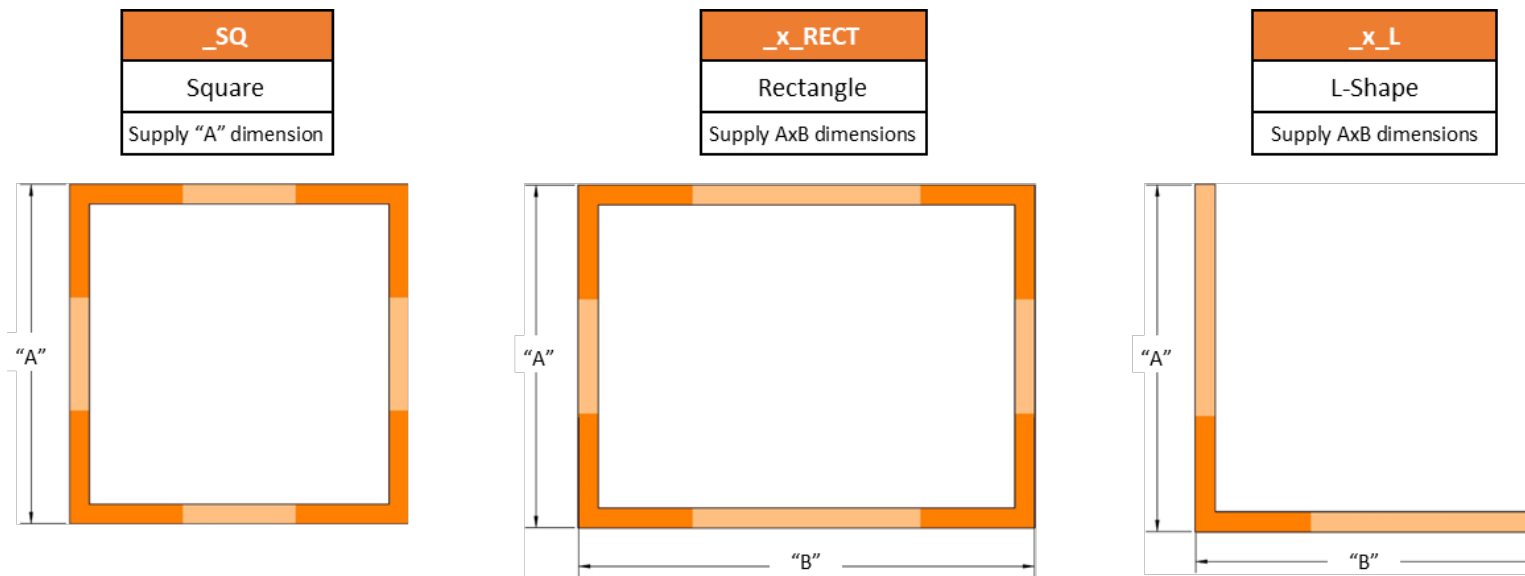

INSTALLATION INSTRUCTIONS

Shape Configuration PM Cont.(ACxxx) Sq or Rect

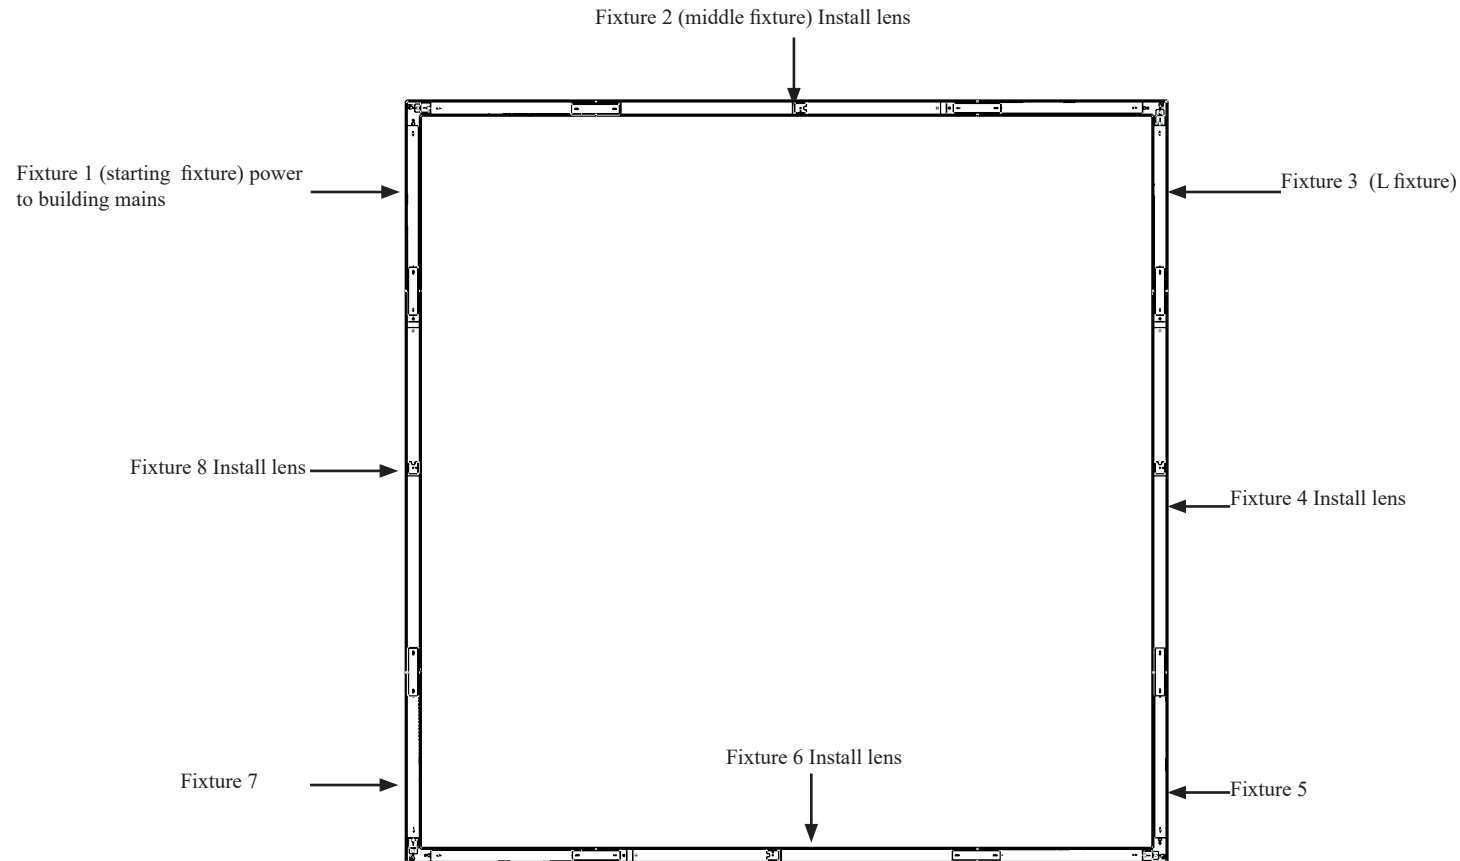

Step 1. Hang fixture 1

Step 2. Hang fixture 2. Connect fixtures 1&2. Slide in lens

Step 3. Hang fixture 3. Slide in lens to cap off that section and connect fixtures 3&2

Step 4. Hang fixture 4. Connect fixtures 4&3. Slide in lens

Step 5. Hang fixture 5. Slide in lens to cap off that section and connect fixtures 5&4







Step 6. Hang fixture 6. Connect fixtures 6&5. Slide in lens

Step 7. Hang fixture 7. Slide in lens to cap off that section and connect fixtures 7&6

Step 8. Hang fixture 8. Connect fixtures 8,7 slide in lens and connect fixtures 8&1







INSTALLATION INSTRUCTIONS

Shape Configuration PM Cont.(ACxxx) Sq or Rect

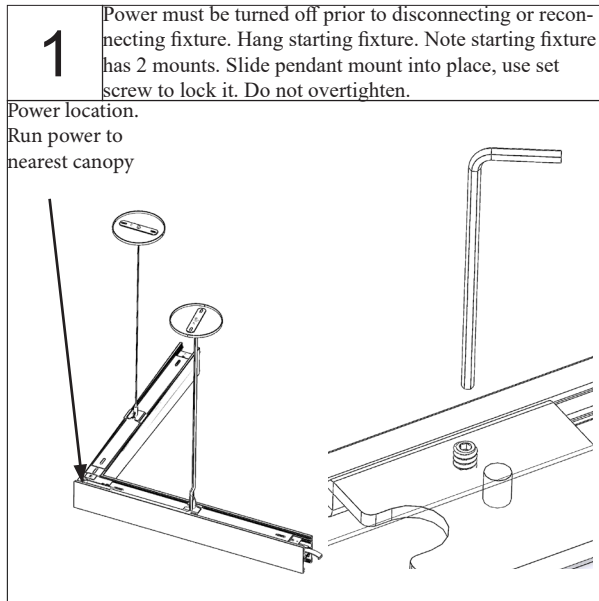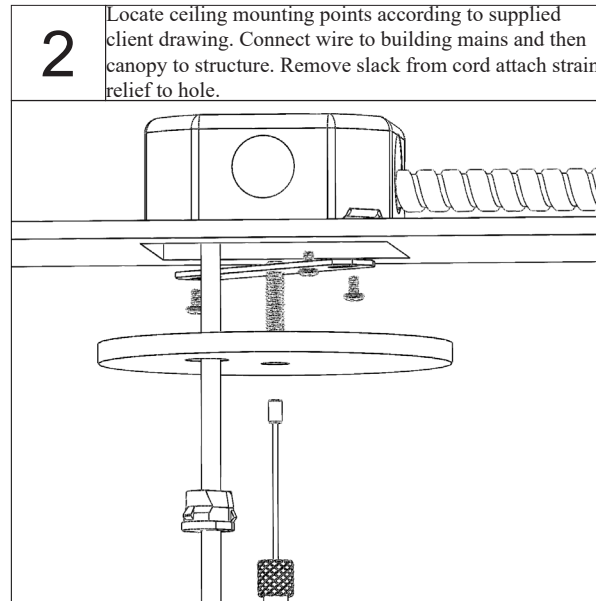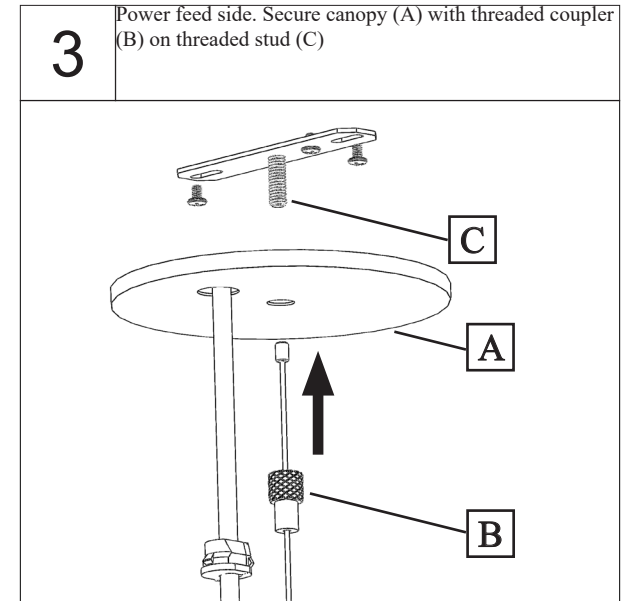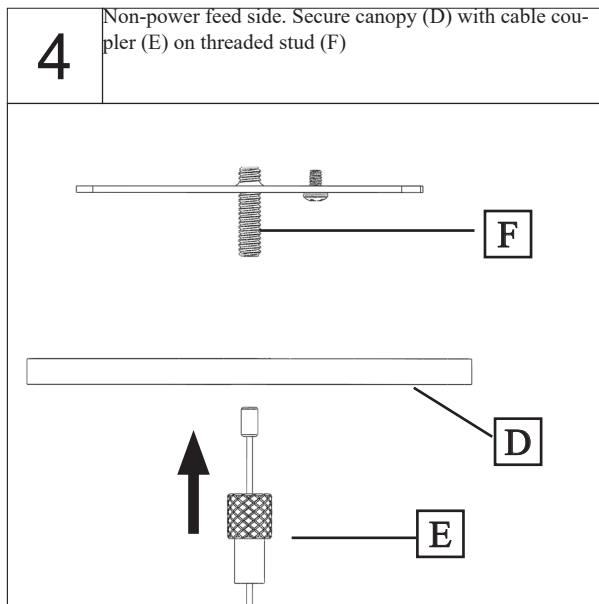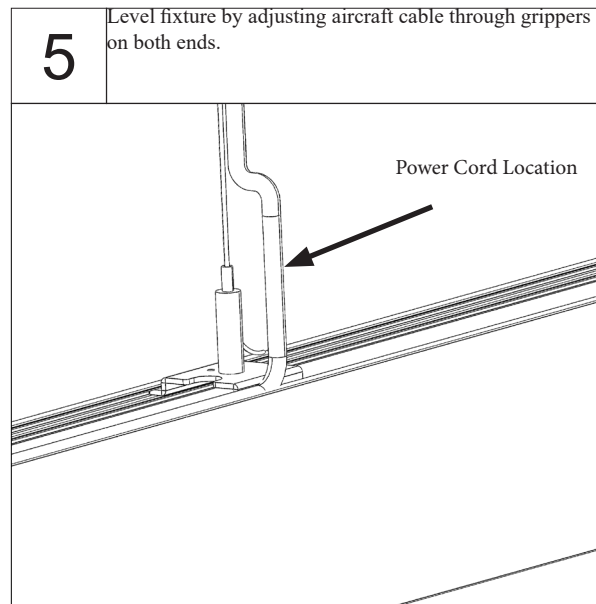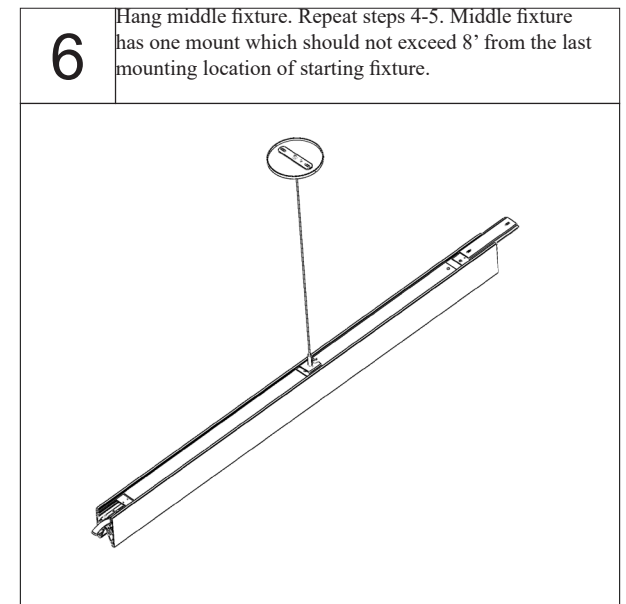

INSTALLATION INSTRUCTIONS


Shape Configuration PM Cont.(ACxxx) Sq or Rect

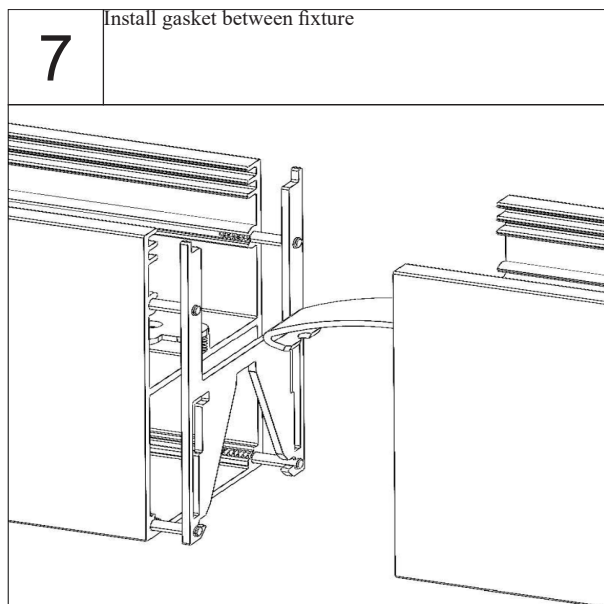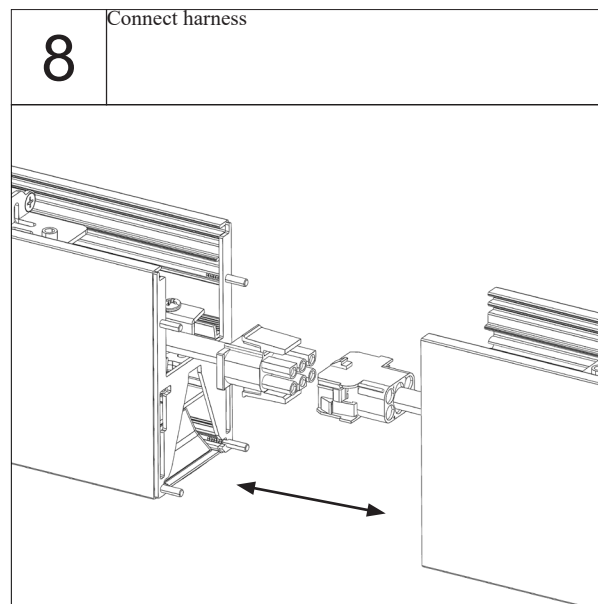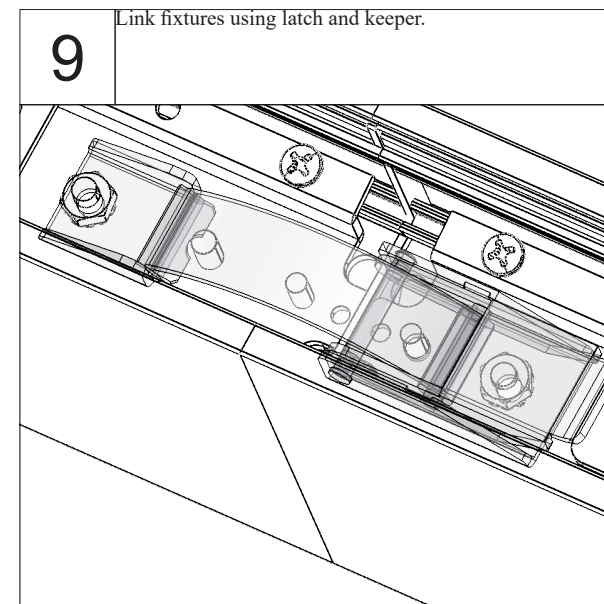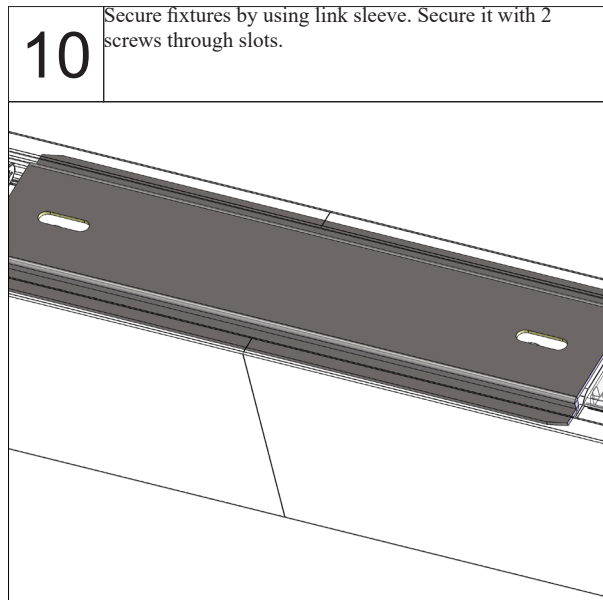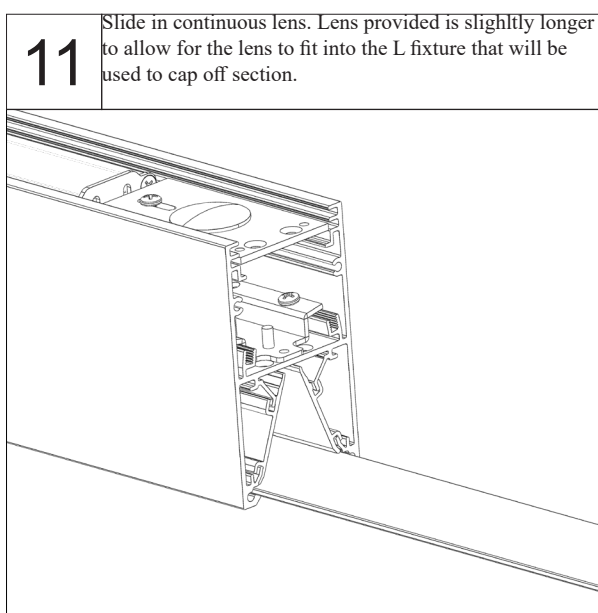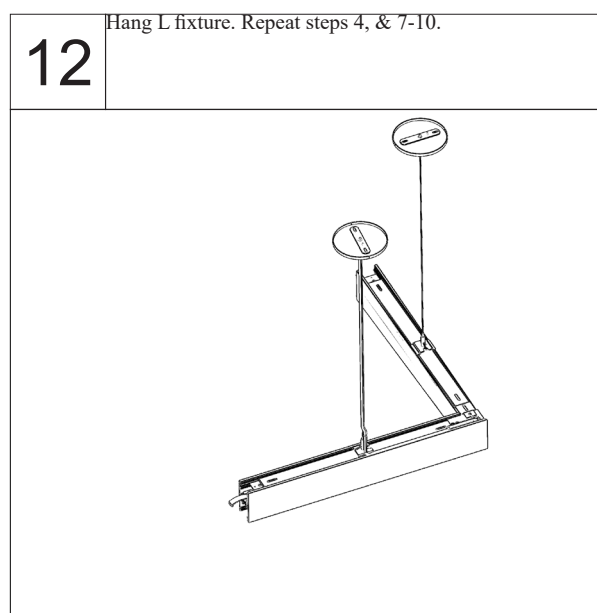


INSTALLATION INSTRUCTIONS

Shape Configuration PM Cont.(ACxxx) Sq or Rect


13 Hang middle fixture. Middle fixture has one mount which should not exceed 8' from the last mounting location. Repeat steps 4 & 7-10.




14 Hang L fixture. Repeat steps 4, & 7-10.

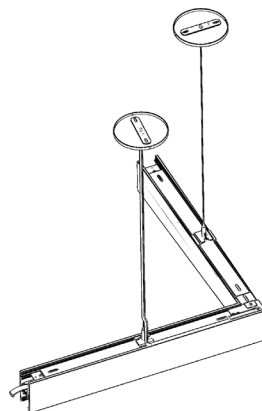


15 Hang middle fixture. Middle fixture has one mount which should not exceed 8' from the last mounting location. Repeat steps 4 & 7-10.




16 Hang L fixture. Repeat steps 4, & 7-10.

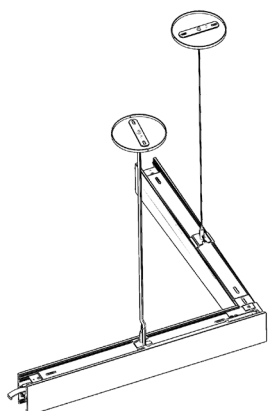

17 Hang middle fixture. Middle fixture has one mount which should not exceed 8' from the last mounting location. Repeat steps 4 & 7-10.









18 Restore Power

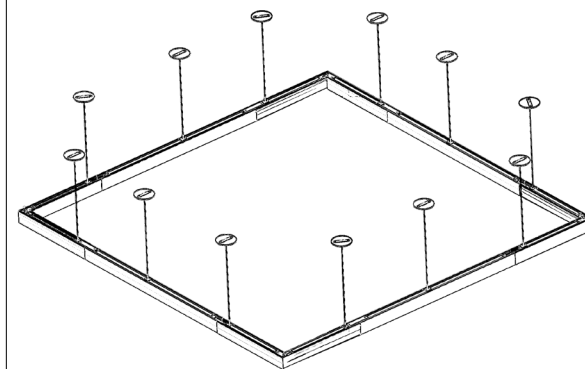







INSTALLATION INSTRUCTIONS

Shape Configuration PM (ACxxx) L
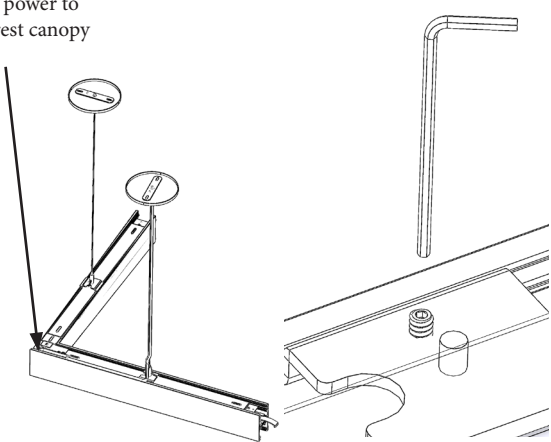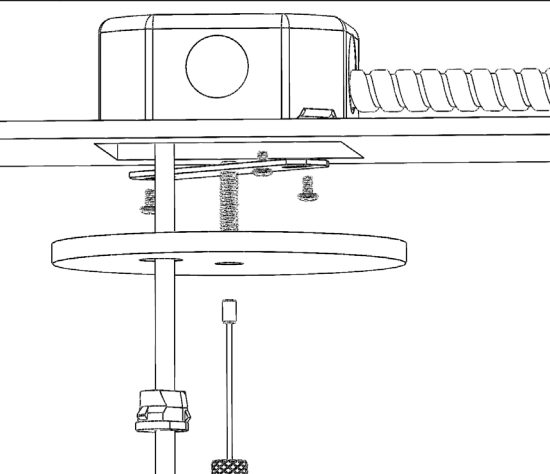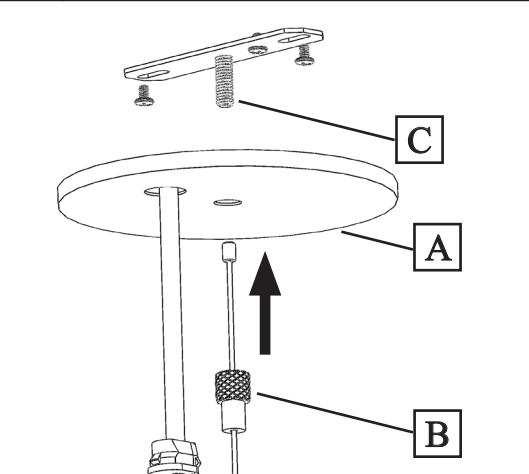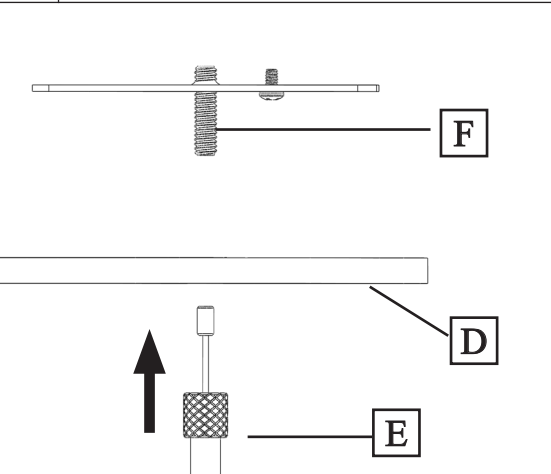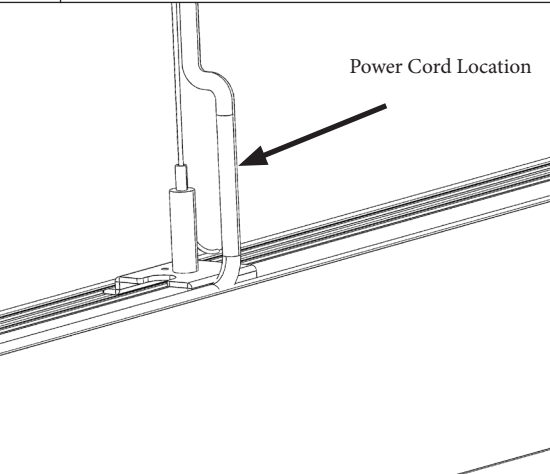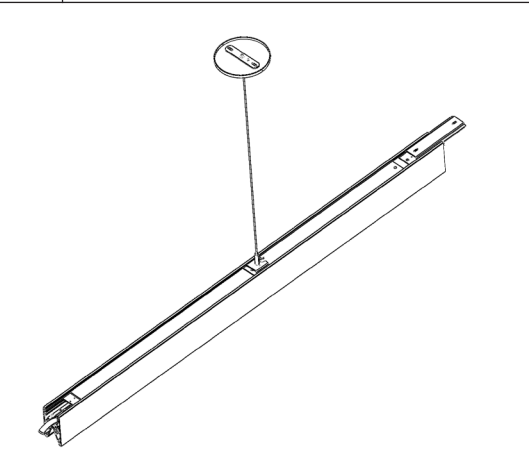
<p>1</p> <p>Power must be turned off prior to disconnecting or reconnecting fixture. Hang starting fixture. Note starting fixture has 2 mounts. Slide pendant mount into place, use set screw to lock it. Do not overtighten.</p> <p>Power location. Run power to nearest canopy</p> 	<p>2</p> <p>Locate ceiling mounting points according to supplied client drawing. Connect wire to building mains and then canopy to structure. Remove slack from cord attach strain relief to hole.</p> 	<p>3</p> <p>Power feed side. Secure canopy (A) with threaded coupler (B) on threaded stud (C)</p> 
<p>4</p> <p>Non-power feed side. Secure canopy (D) with cable coupler (E) on threaded stud (F)</p> 	<p>5</p> <p>Level fixture by adjusting aircraft cable through grippers on both ends.</p> <p>Power Cord Location</p> 	<p>6</p> <p>Hang middle fixture. Repeat steps 4-5. Middle fixture has one mount which should not exceed 8' from the last mounting location of starting fixture.</p> 




INSTALLATION INSTRUCTIONS

Shape Configuration PM Cont. (ACxxx) L

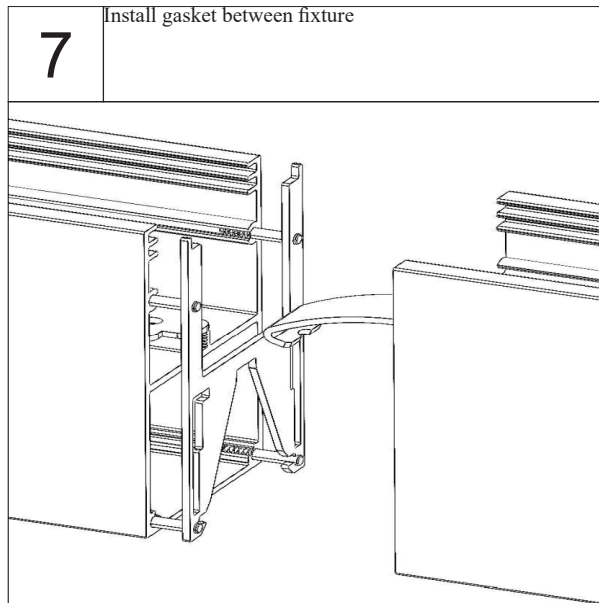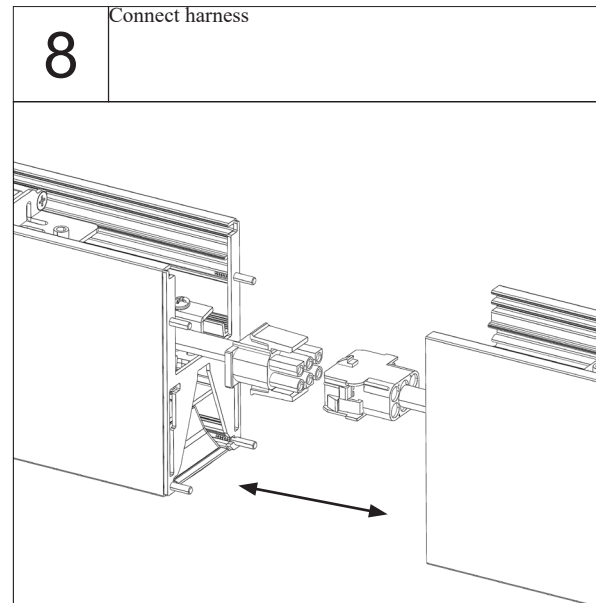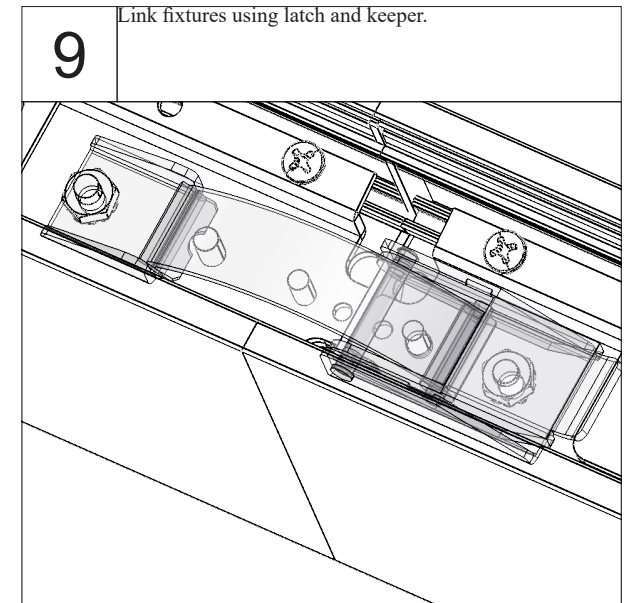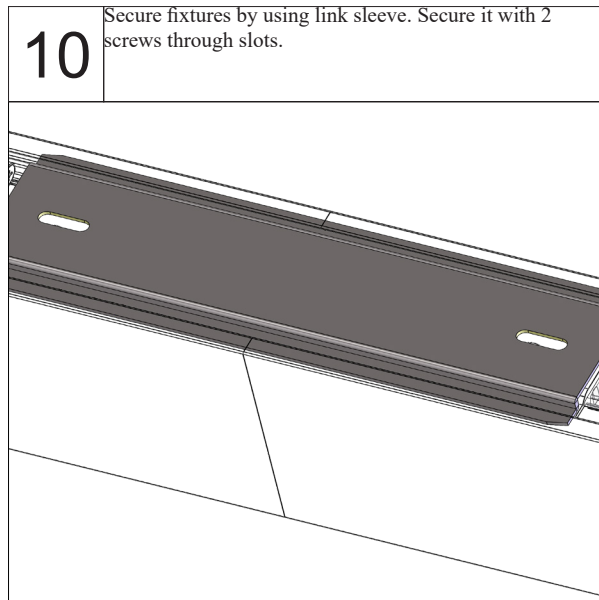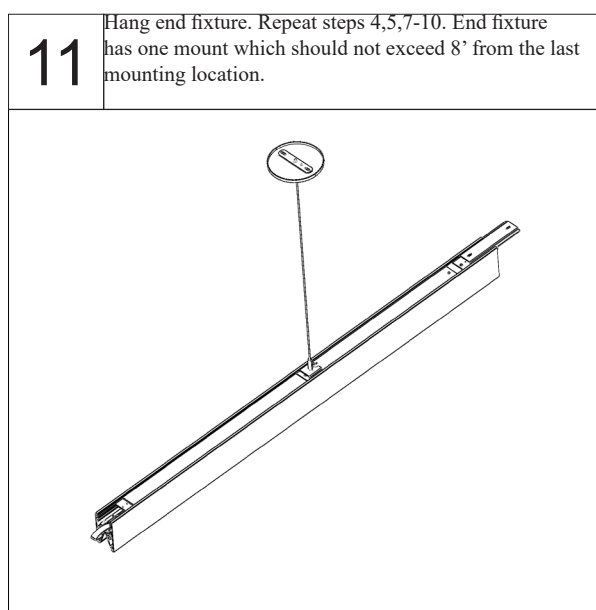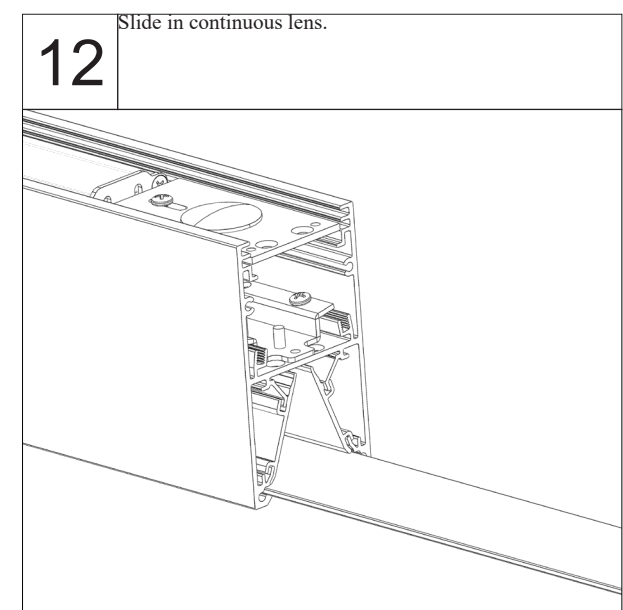






INSTALLATION INSTRUCTIONS

Shape Configuration PM Cont. (ACxxx) L

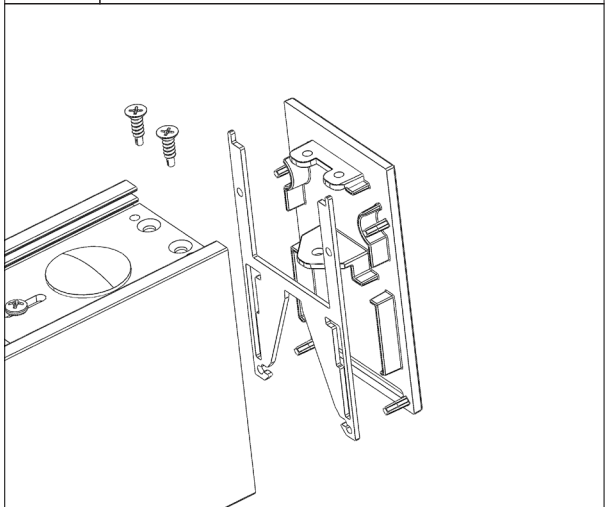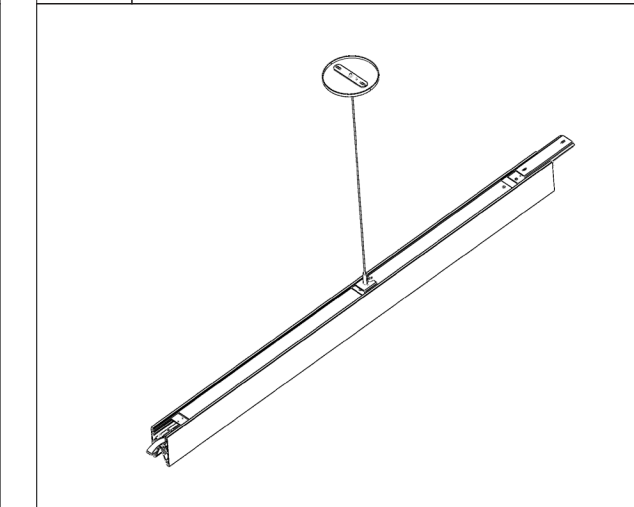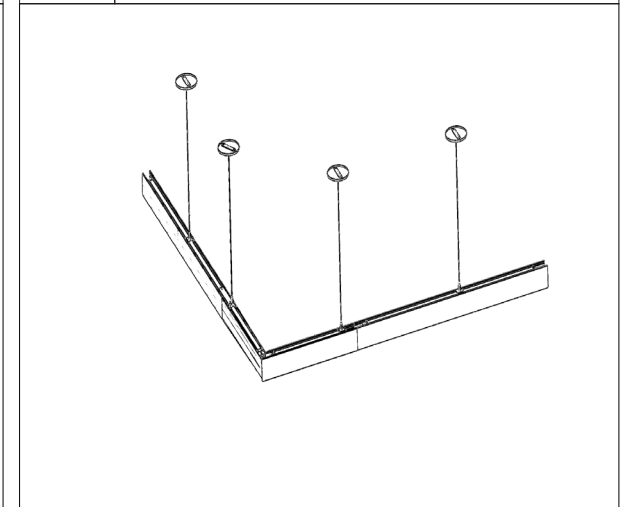13	14	15
		







INSTALLATION INSTRUCTIONS

Shape Configuration Wall Mount (WM) L

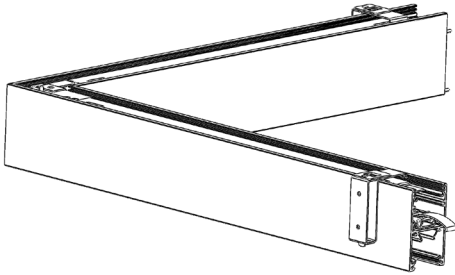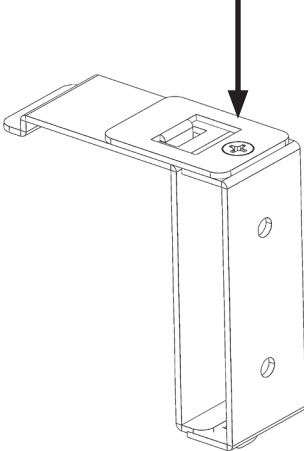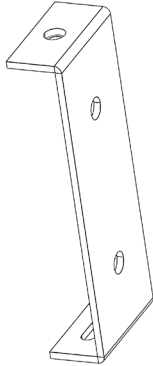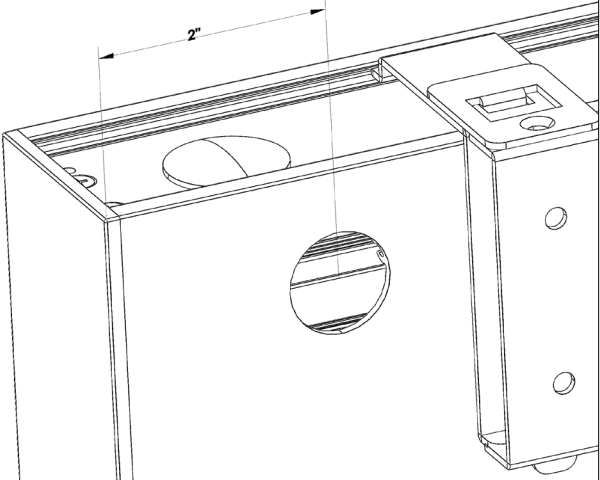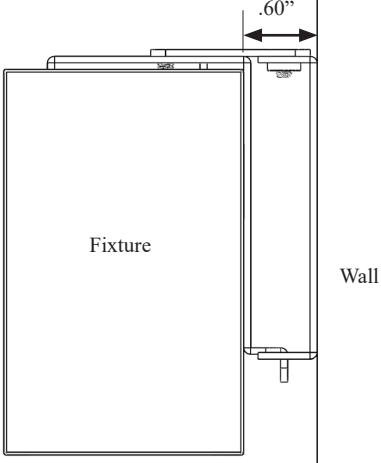1	Power must be turned off prior to disconnecting or re-connecting fixture. Hang starting fixture. Note all fixtures have 2 mounts.	2	Remove top screw to release wall mount bracket.	3	Locate mounting points according to supplied client drawing. Install brackets to wall.										
 <p>Wire Colors (standard)</p> <table border="0"> <tr> <td>Black</td> <td>Hot</td> </tr> <tr> <td>White</td> <td>Neutral</td> </tr> <tr> <td>Green</td> <td>Ground</td> </tr> <tr> <td>Purple</td> <td>+ Dim (0-10v)</td> </tr> <tr> <td>Gray</td> <td>- Dim (0-10v)</td> </tr> </table>		Black	Hot	White	Neutral	Green	Ground	Purple	+ Dim (0-10v)	Gray	- Dim (0-10v)				
Black	Hot														
White	Neutral														
Green	Ground														
Purple	+ Dim (0-10v)														
Gray	- Dim (0-10v)														
4	Connect fixture wiring to line power.	5		6	Hang end fixture. Repeat steps 2 & 3.										
															

INSTALLATION INSTRUCTIONS

Shape Configuration Wall Mount Cont. (WM) L

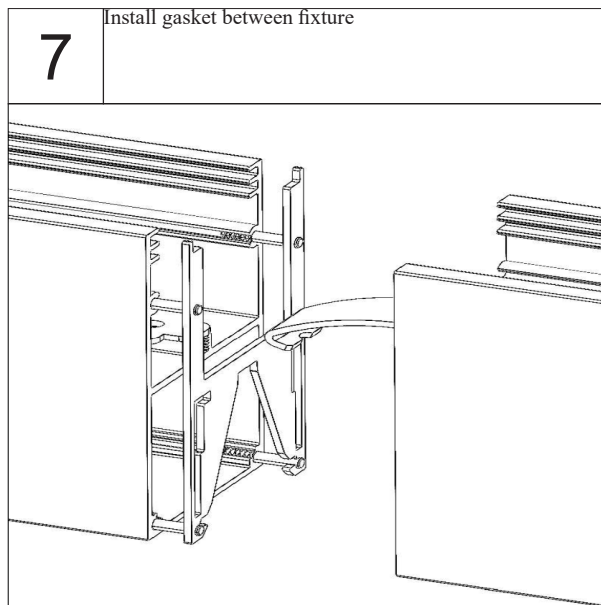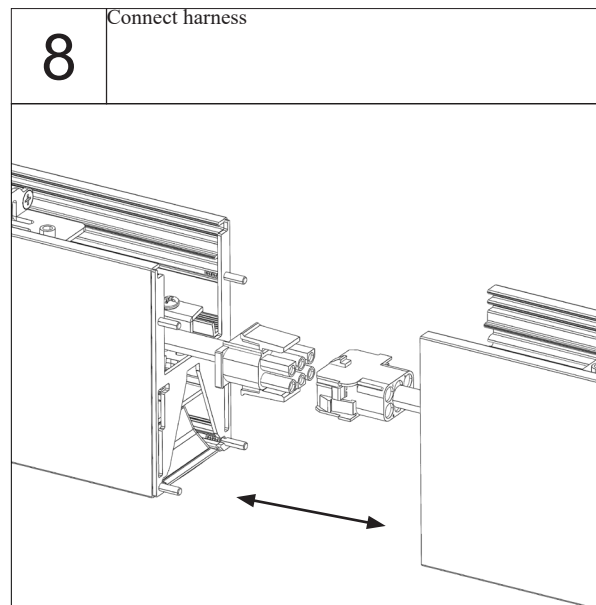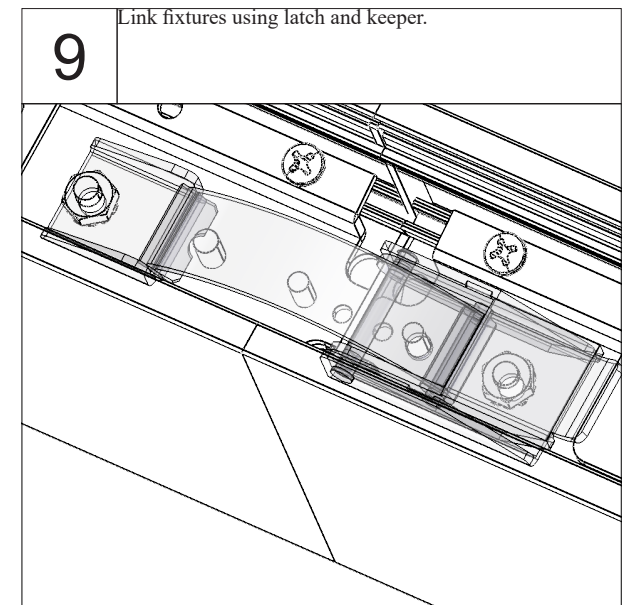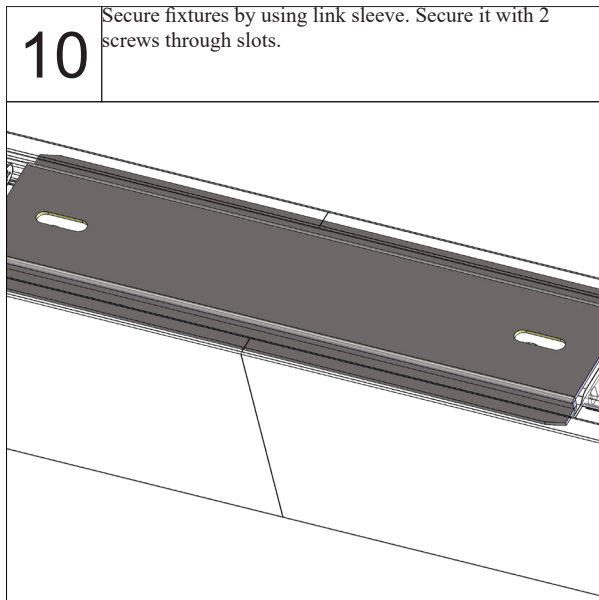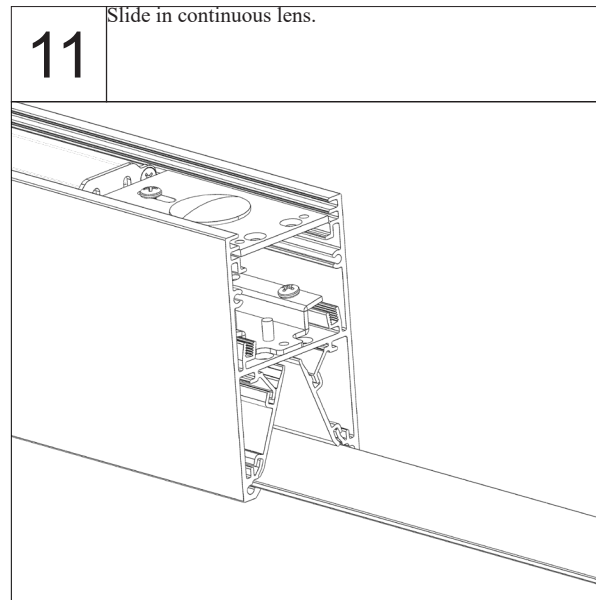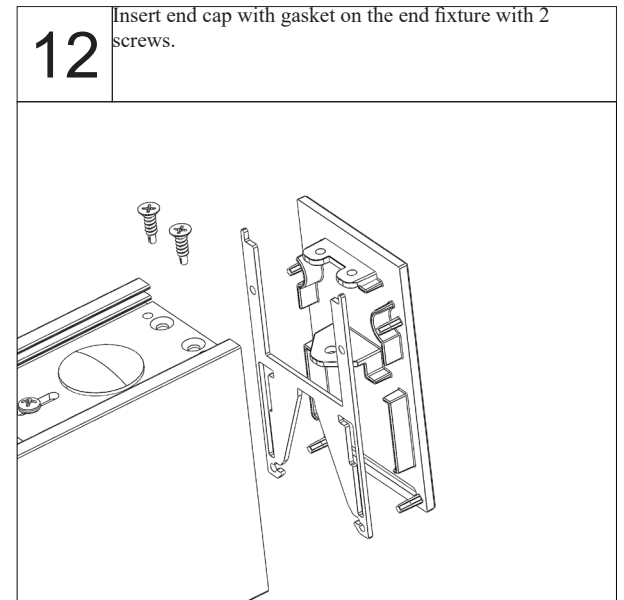

INSTALLATION INSTRUCTIONS

Shape Configuration Wall Mount Cont. (WM) L


13

Hang end fixture. Repeat steps 2, 3, & 7-12.









14

Restore power

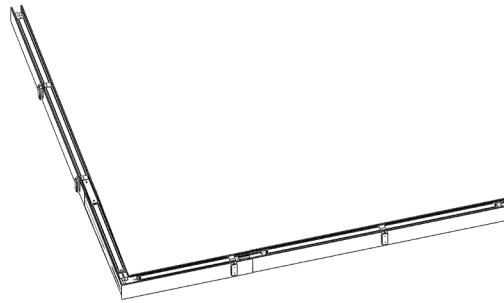

INSTALLATION INSTRUCTIONS

Joint Shape Configuration Architectural Wall Mount (AWM) L

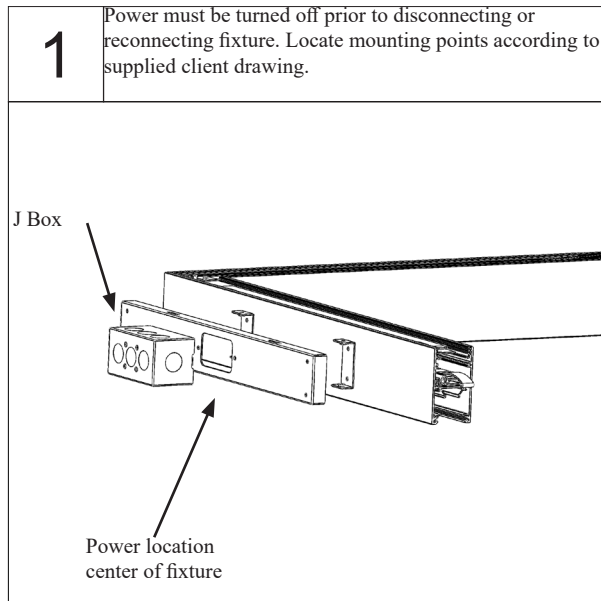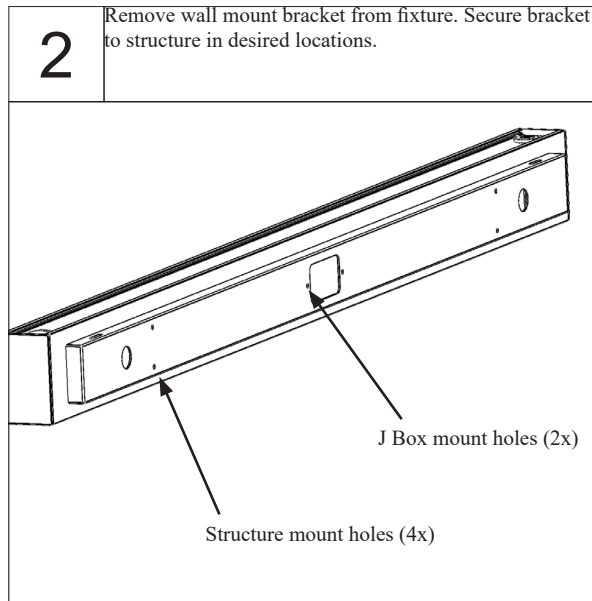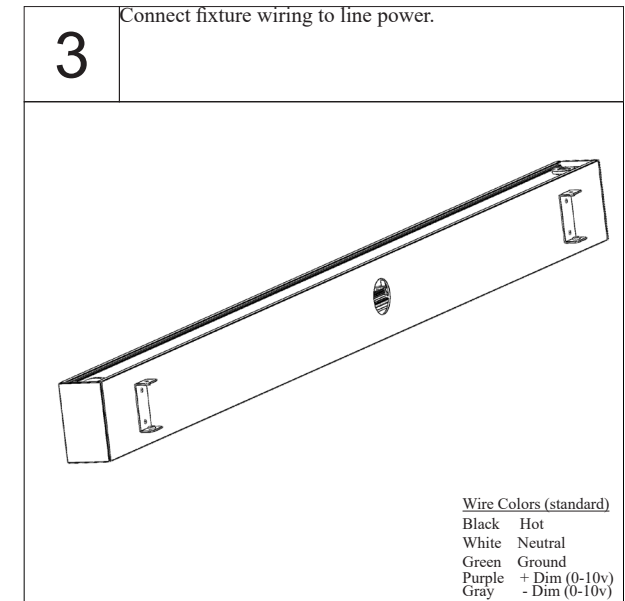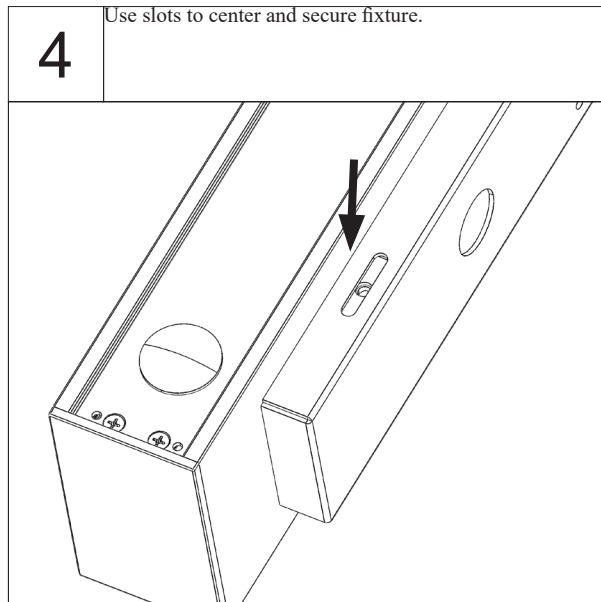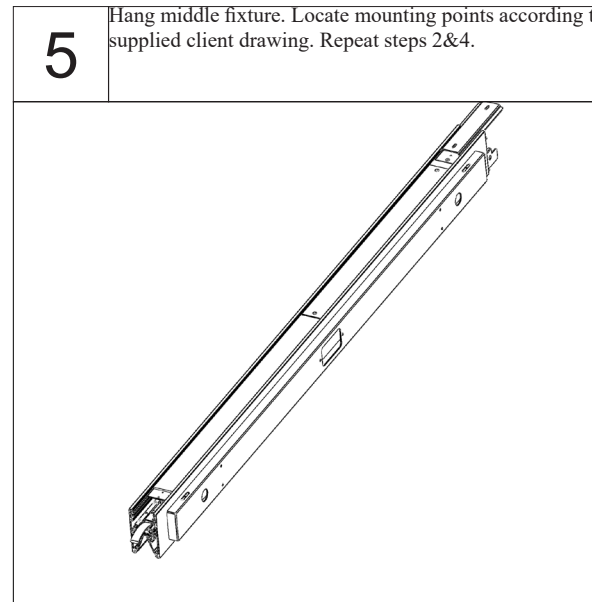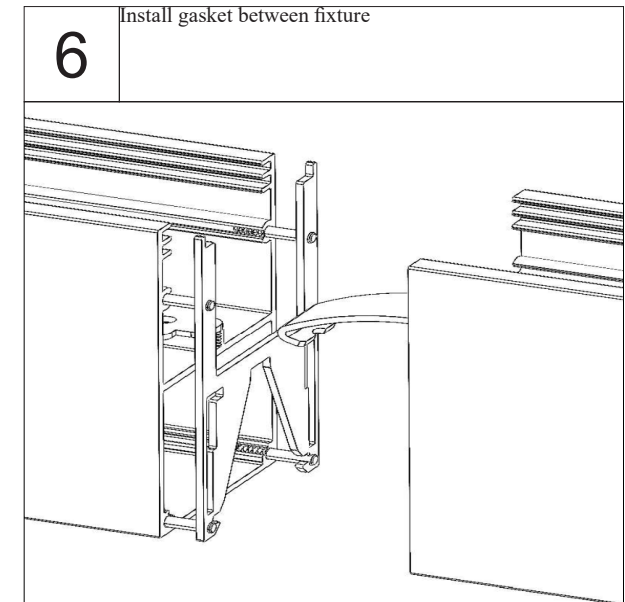


INSTALLATION INSTRUCTIONS

Joint Shape Configuration Architectural Wall Mount Cont.(AWM) L


7

Connect harness

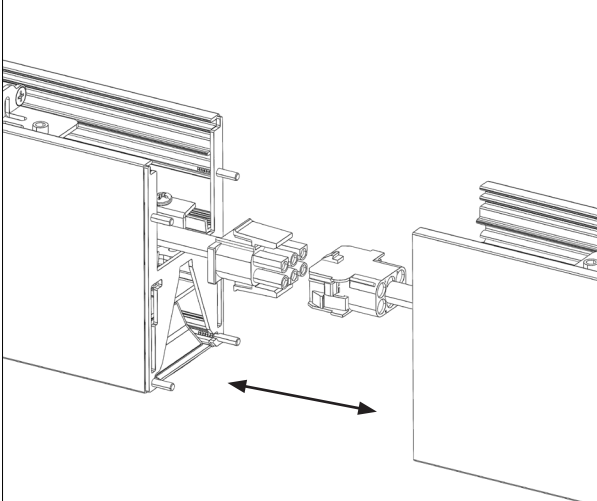


8

Link fixtures using latch and keeper.

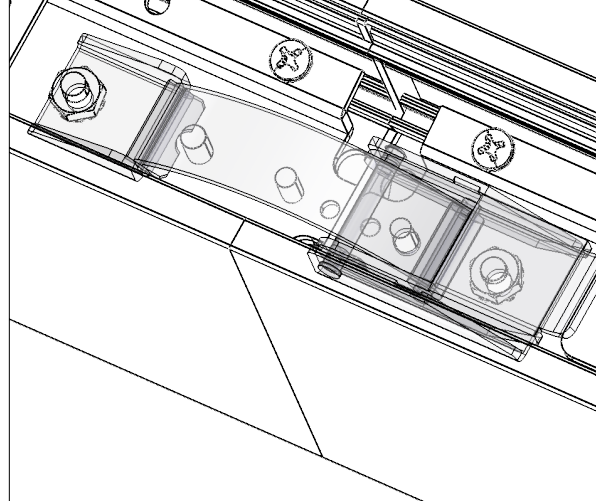


9

Secure fixtures by using link sleeve. Secure it with 2 screws through slots.

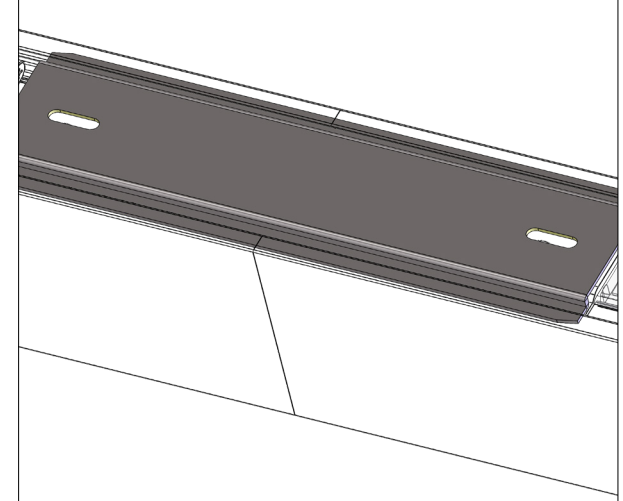


10

Slide in continuous lens.

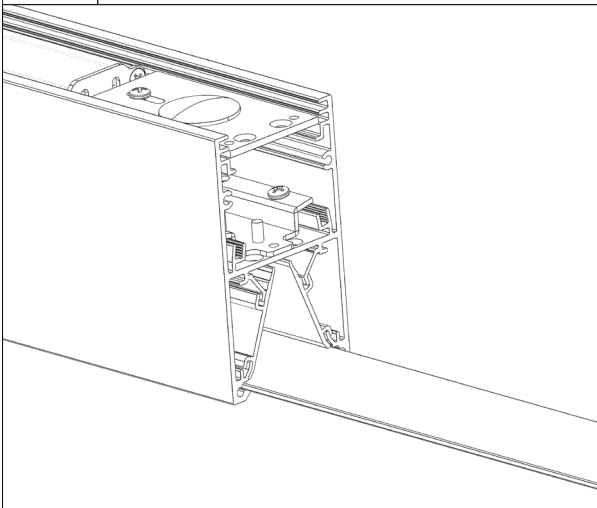

11

Insert end cap with gasket on the end fixture with 2 screws.

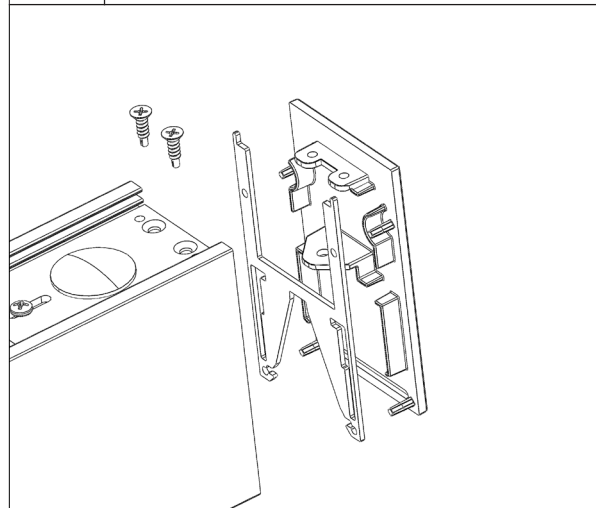

12

Hang end fixture. Repeat steps 2, 3, & 7-11.




INSTALLATION INSTRUCTIONS

Shape Configuration Wall Mount Cont. (WM) L


13

Restore power

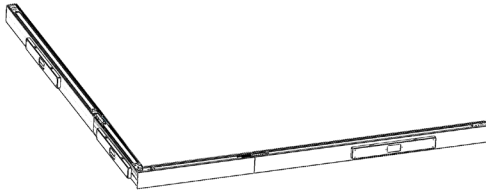

INSTALLATION INSTRUCTIONS

Shape Continuous Stem With Canopy (STEMxxx) Sq or Rect

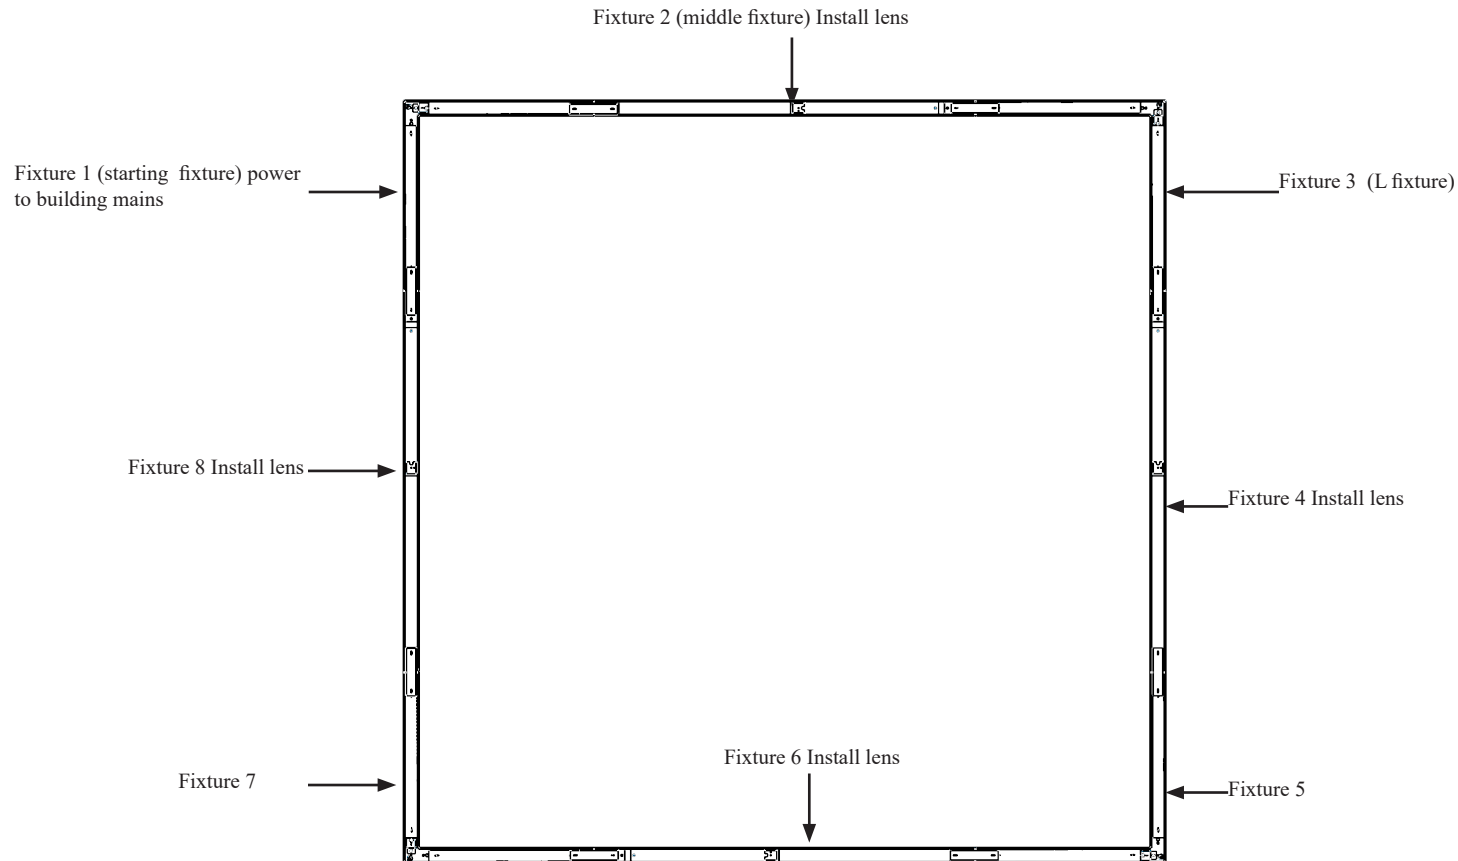

Step 1. Hang fixture 1

Step 2. Hang fixture 2. Connect fixtures 1&2. Slide in lens

Step 3. Hang fixture 3. Slide in lens to cap off that section and connect fixtures 3&2

Step 4. Hang fixture 4. Connect fixtures 4&3. Slide in lens

Step 5. Hang fixture 5. Slide in lens to cap off that section and connect fixtures 5&4







Step 6. Hang fixture 6. Connect fixtures 6&5. Slide in lens

Step 7. Hang fixture 7. Slide in lens to cap off that section and connect fixtures 7&6

Step 8. Hang fixture 8. Connect fixtures 8,7 slide in lens and connect fixtures 8&1







INSTALLATION INSTRUCTIONS

Shape Continuous Stem With Canopy (STEMxxx) Sq or Rect

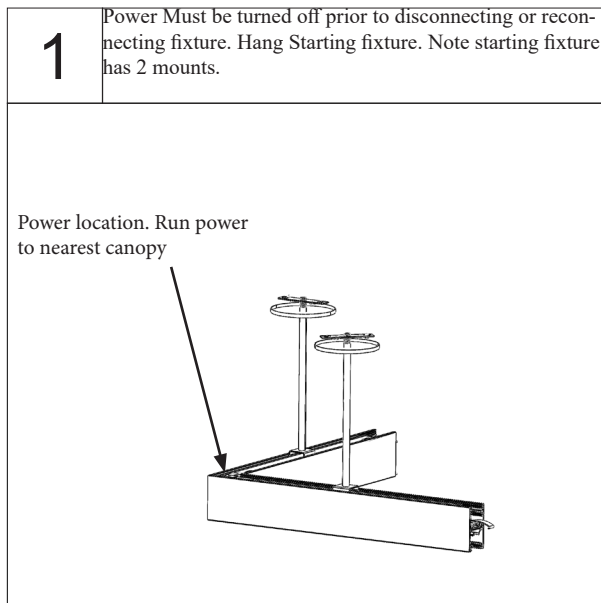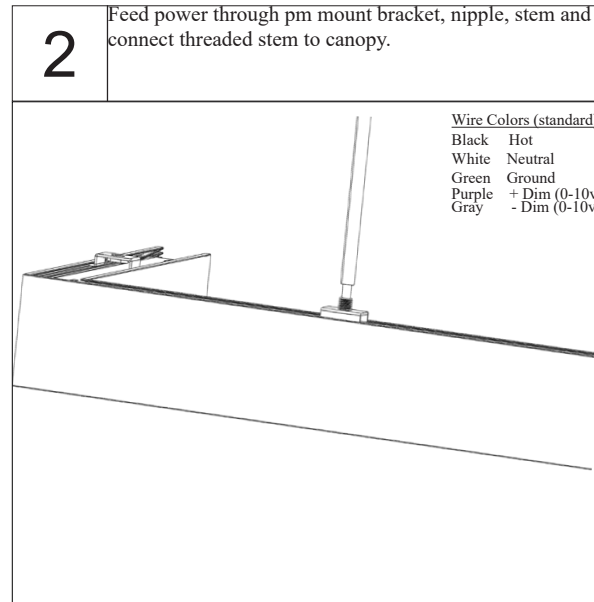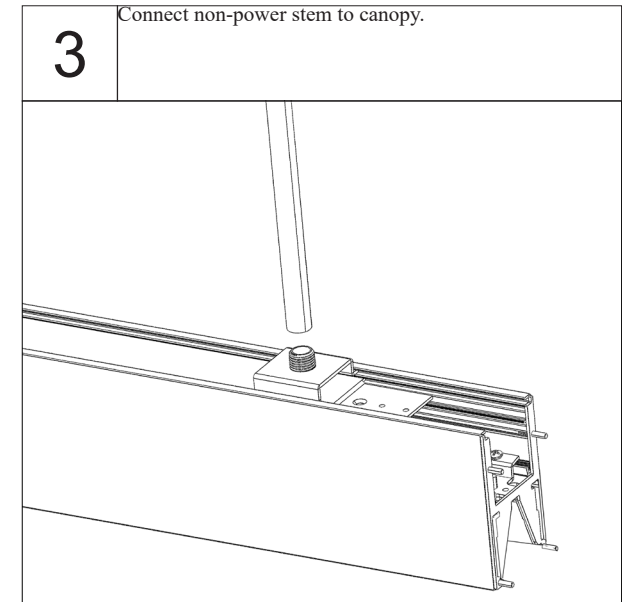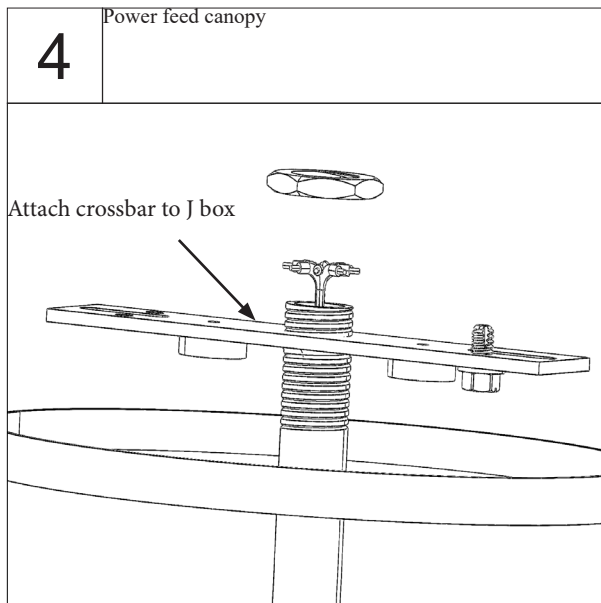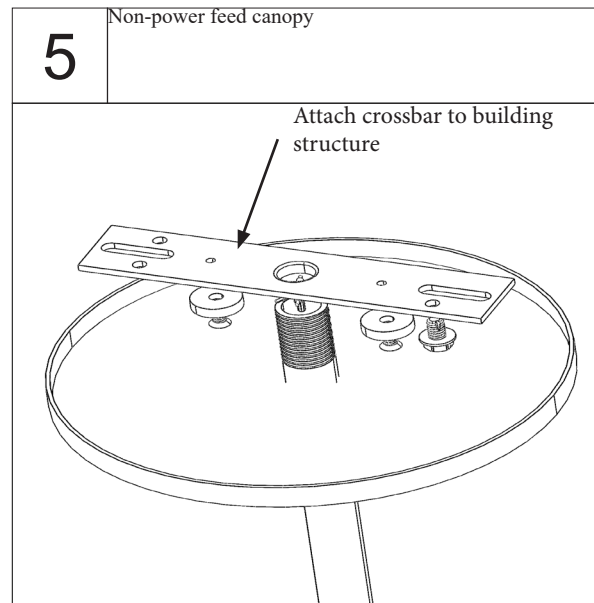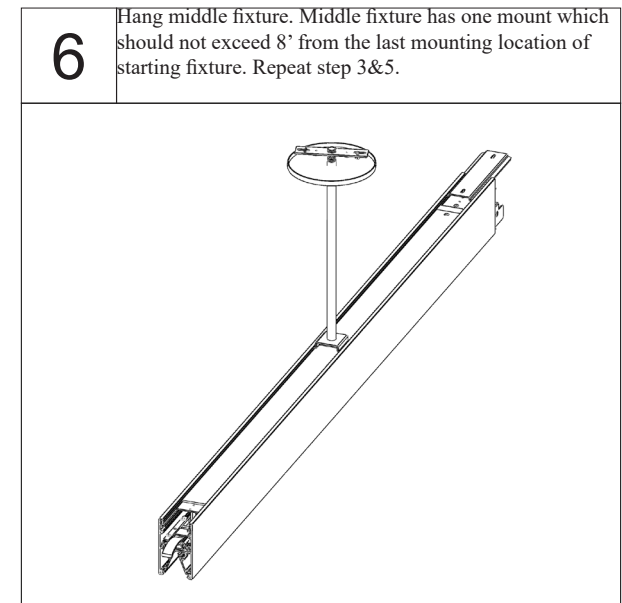

INSTALLATION INSTRUCTIONS

Shape Continuous Stem With Canopy (STEMxxx) Sq or Rect

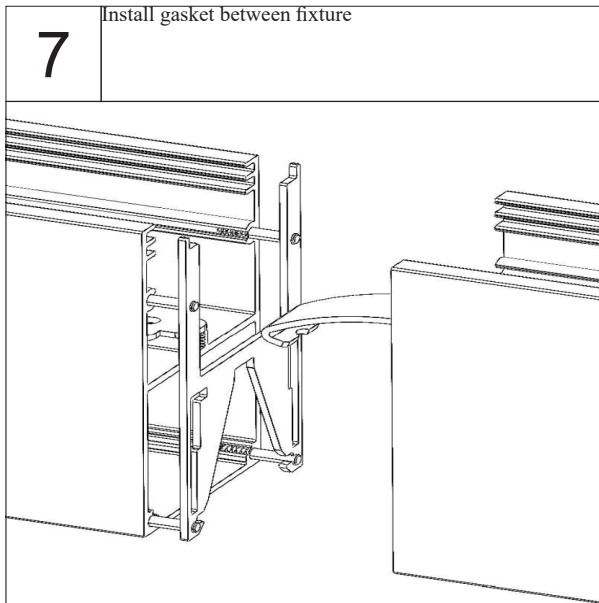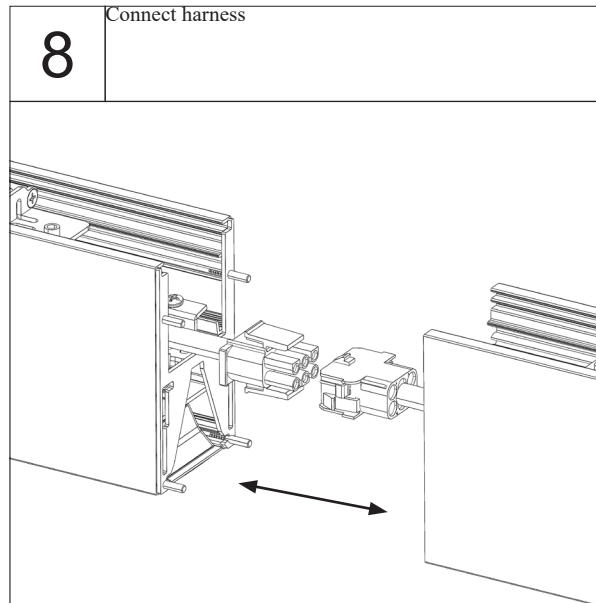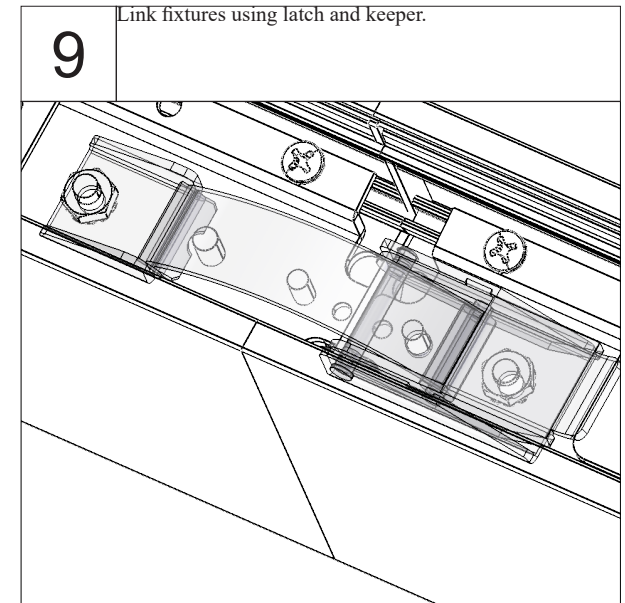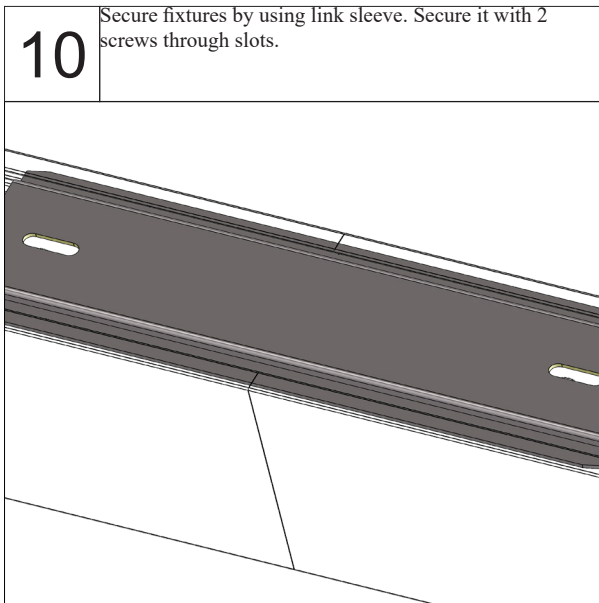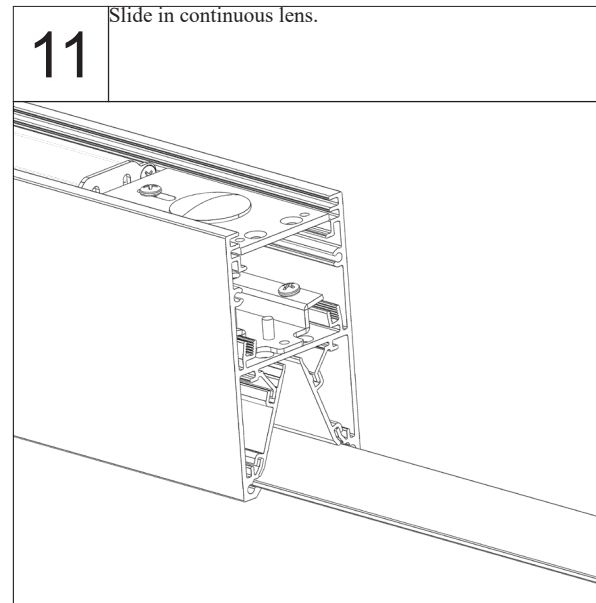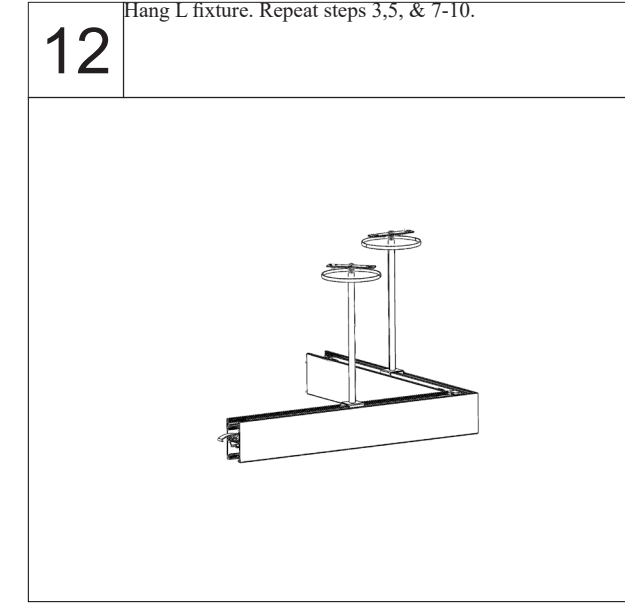


INSTALLATION INSTRUCTIONS

Shape Continuous Stem With Canopy (STEMxxx) Sq or Rect


13

Hang middle fixture. Middle fixture has one mount which should not exceed 8' from the last mounting location of starting fixture. Repeat step 4-5, & 7-11.

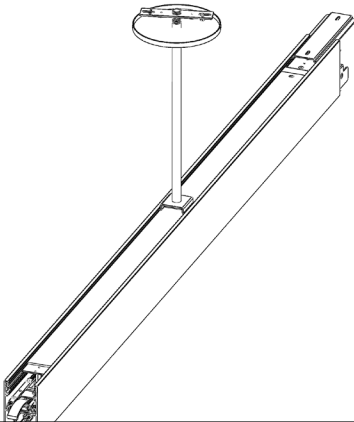


14

Hang L fixture. Repeat steps 3,5, & 7-10.




15

Hang middle fixture. Middle fixture has one mount which should not exceed 8' from the last mounting location of starting fixture. Repeat step 4-5, & 7-11.

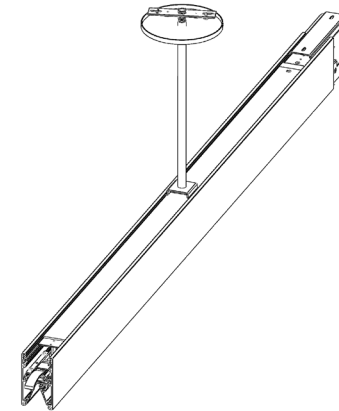


16

Hang L fixture. Repeat steps 3,5, & 7-10.




17

Hang middle fixture. Middle fixture has one mount which should not exceed 8' from the last mounting location of starting fixture. Repeat step 3,5, & 7-11.

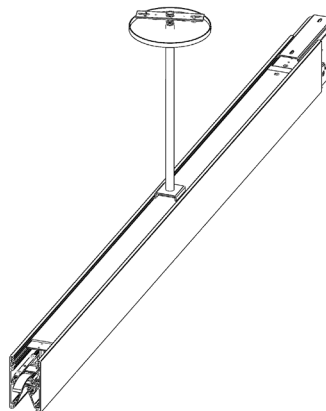







18

Restore Power

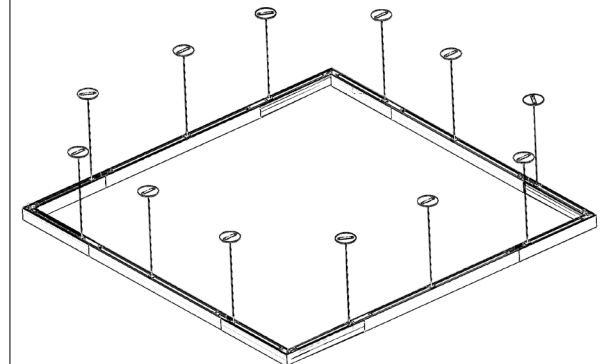







INSTALLATION INSTRUCTIONS

Shape Continuous Stem With Canopy (STEMxxx) L

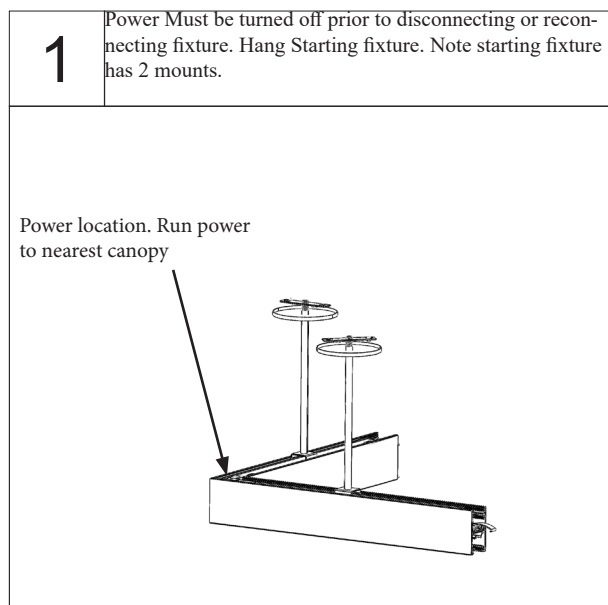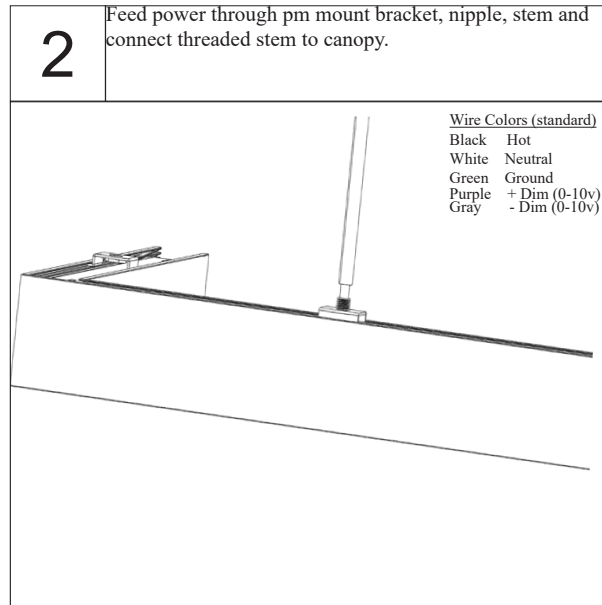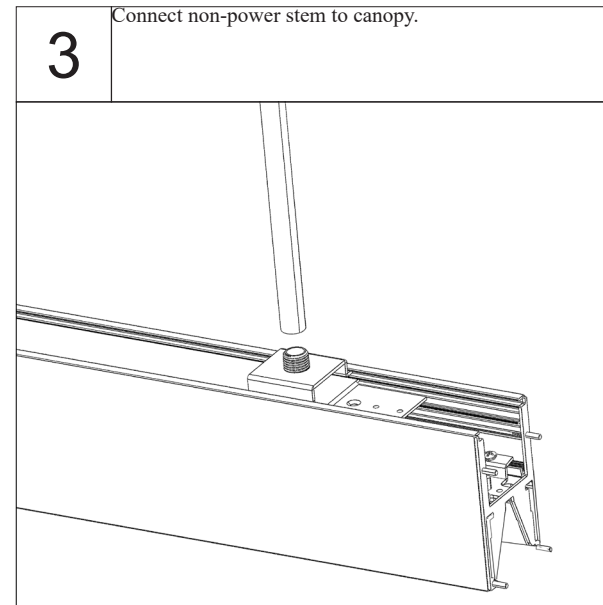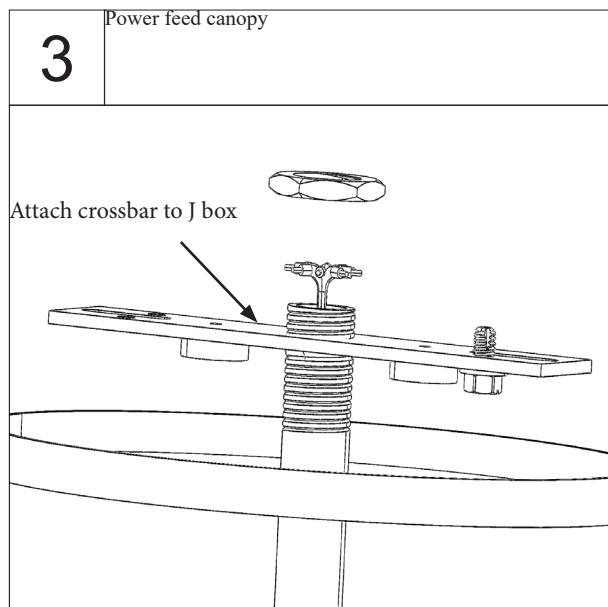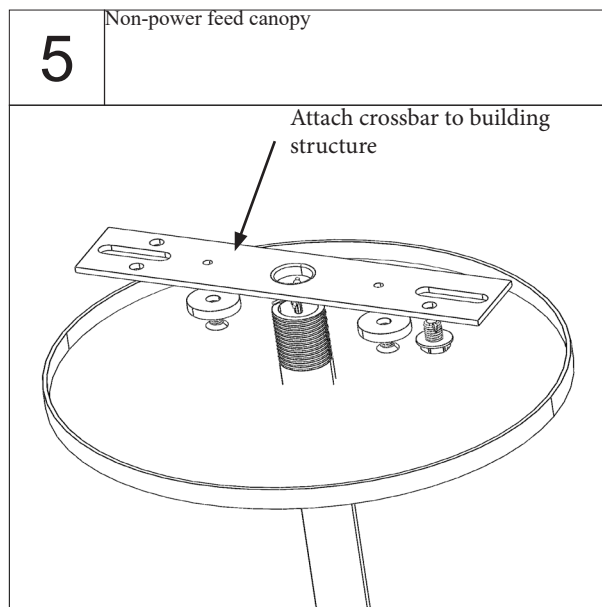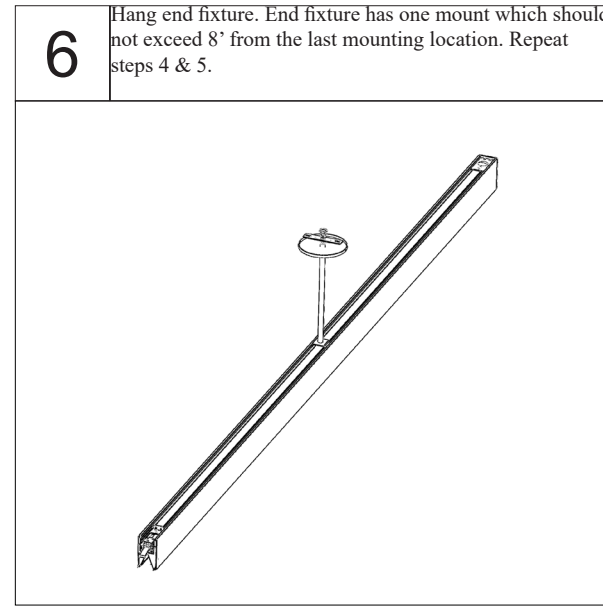

INSTALLATION INSTRUCTIONS

Shape Continuous Stem With Canopy Cont. (STEMxxx) L

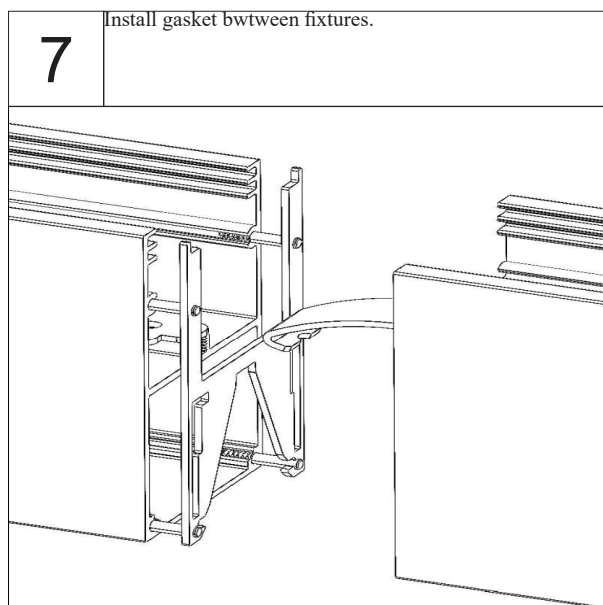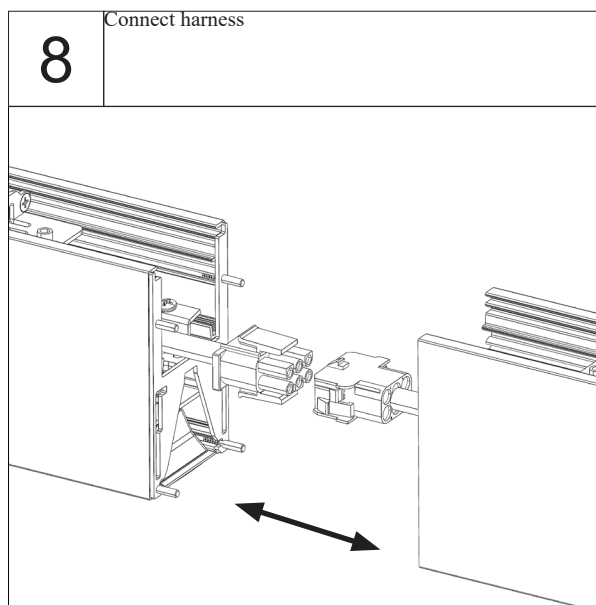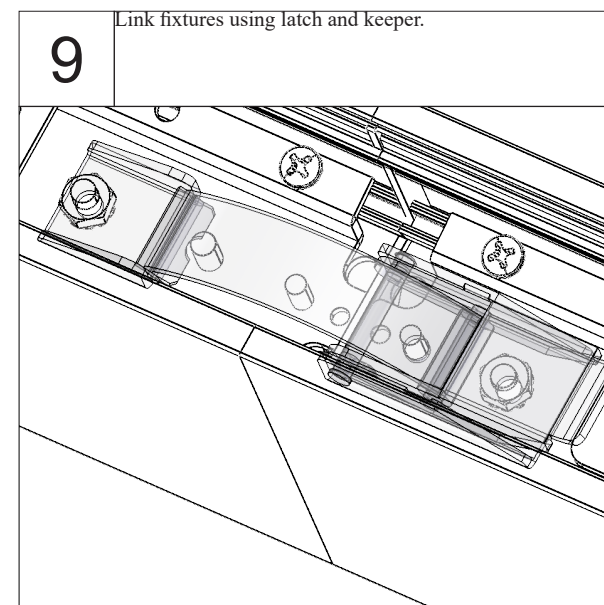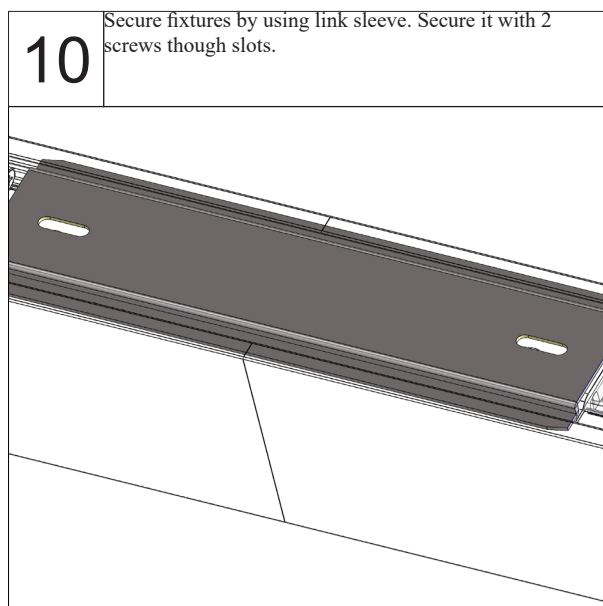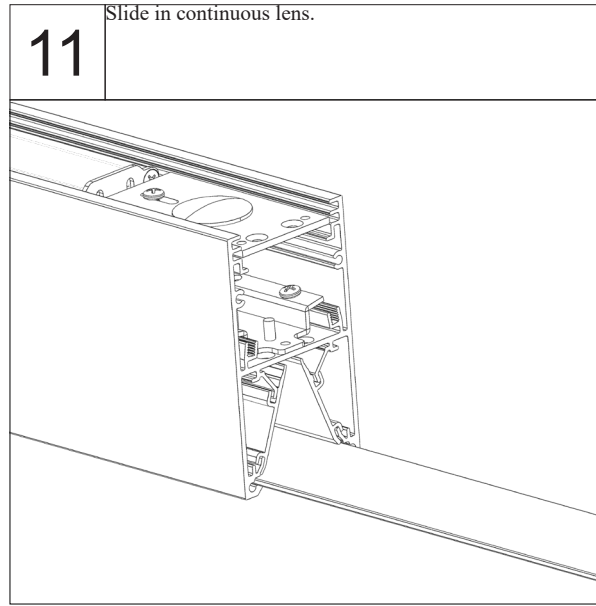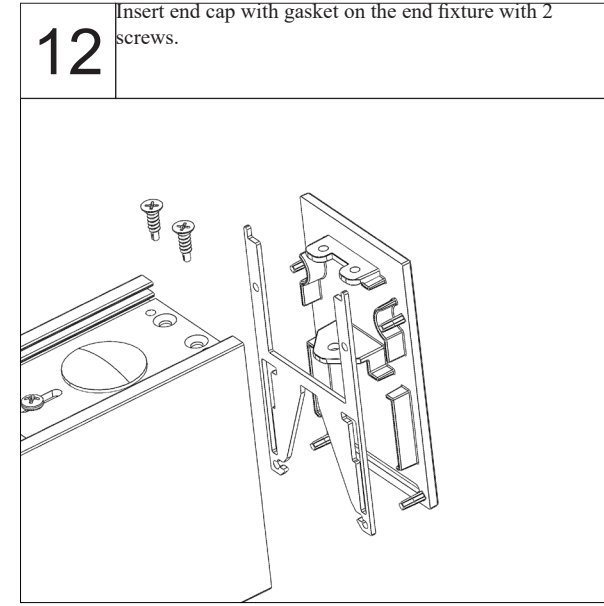

INSTALLATION INSTRUCTIONS

Shape Continuous Stem With Canopy Cont. (STEMxxx) L

