


BEAM DIRECT



DIMENSIONS

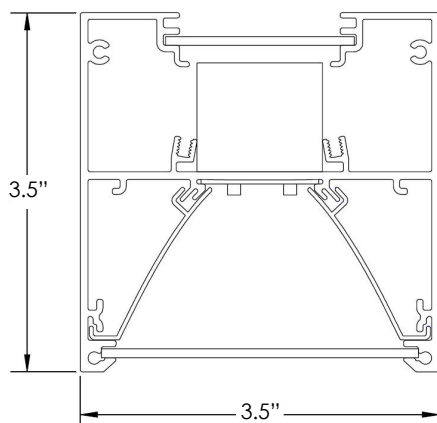

ORDERING LOGIC

| WS-BEAMD | | | | | | |
|----------|----------------|---|--|--|--------|---|
| SERIES | LENGTH | LUMENS PER FOOT | DISTRIBUTION | CCT | CRI | FINISH |
| WS-BEAMD | xx= Run Length | 350= 350 LPF 500= 500 LPF 750= 750 LPF 1000= 1000 LPF XXX= Custom LPF | SD= SatinIce Diffuse WD= Wide Diffuse | 30K= 3000K 35K= 3500K 40K= 4000K | 80= 80 | <u>STANDARD</u> PW= Powder Coat White PB= Powder Coat Black |

| MOUNTING | VOLTAGE | ELECTRICAL | OPTIONS |
|--|------------|--------------------|---|
| CABLES WITH CANOPY KITS ACW05= White Cord 5' ACW10= White Cord 10' ACB05= Black Cord 5' ACB10= Black Cord 10' | U= 120-277 | 1C= Single Circuit | BATTERIES #EMB6= 6W EM Battery (Bodine) (# indicates quantity) #EMB10= 10W EM Battery (Bodine) (# indicates quantity) Continuous Runs with Batteries must have Ordering Guide Worksheet (page 3) submitted with order. |

CABLES WITH LOOPS
ALW10= White Cord 10'
ALB10= Black Cord 10'

EXAMPLE: WS-BEAMD-40-625-WD-35K-80-PW-ACW10-U-1C

| | |
|------------|--|
| Type: | |
| Project: | |
| REP/Agent: | |
| Order #: | |



5 DAY TURNAROUND

FEATURES

- ★ Shipment up to 500' in 5 working days
- ★ Continuous lensing standard- runs up to 200'
- ★ Extruded aluminum single piece housing
- ★ Individual or continuous rows consisting of 2', 4', 6' and 8' fixtures
- ★ Linear runs with proprietary joiner design
- ★ Light levels can be set at the factory
- ★ Efficacy up to 135 lm/W
- ★ Soft diffuse direct lighting
- ★ Textured powder coat finishes available in white & black
- ★ Approved for dry and damp locations
- ★ 0-10v dimming is standard
- ★ Dim to 1% of output current is standard



Declare.

LUMEN PACKAGES


Based on 3500K CCT. Other CCT available.

| MODEL | LUMENS | INPUT WATTS | Lm/W |
|--------------------------|--------|-------------|------|
| WS-BEAMD-4-750-WD-35K-80 | 3,000 | 24 | 123 |
| WS-BEAMD-8-750-WD-35K-80 | 6,000 | 47 | 128 |


BEAM DIRECT

MOUNTING OPTIONS

ACxxx (Aircraft Cable with Canopy) - Drywall, Solid, Tile (On-Grid), Tile (Off-Grid)

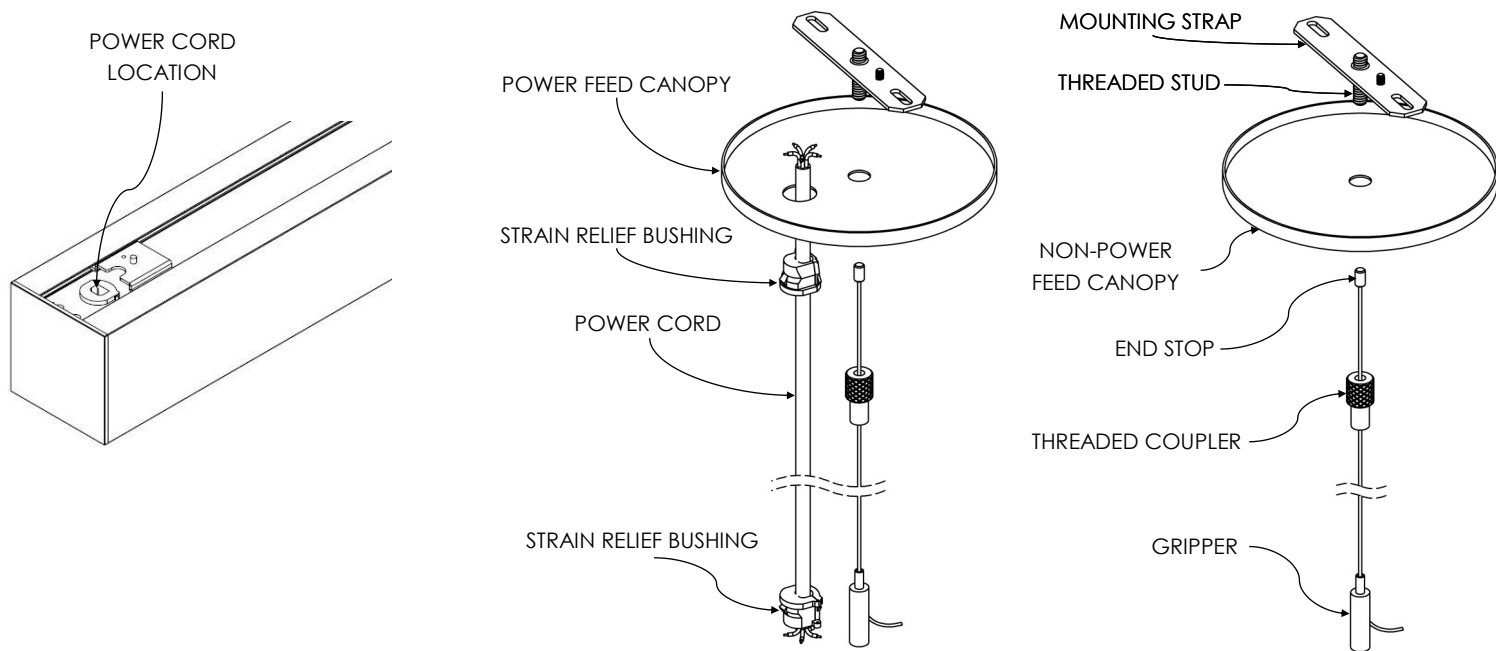

ALxxx (Aircraft Cable with Loops)

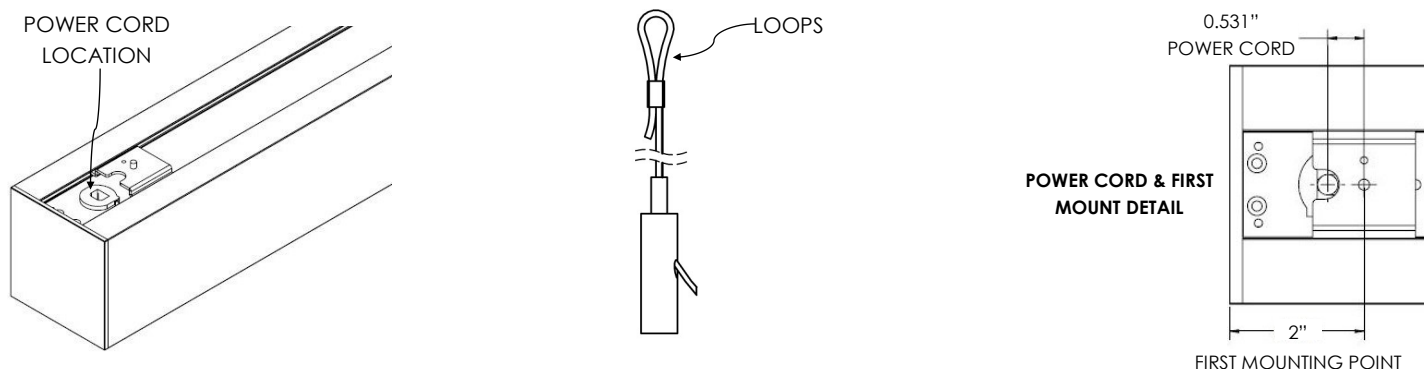

SPECIFICATIONS

Housing

Nominal 3.5" x 3.5" x .075" thick housing of continuous extruded 6063 T5 aluminum.

Color

Colors for the housing are available in a powder coated white and black.

Luminaire Length

2', 4', 6' & 8' lengths are available for a single stand-alone section. Using internal joiners, these sections can be joined to form longer runs.

End Caps

Injection molded flat end caps are mechanically attached with no exposed fasteners to enhance architectural aesthetic and prevent light leak.

Source

Lumen packages are available in three color temperature options (3000K, 3500K and 4000K) - all within 3 MacAdam ellipses.

Certification

Intertek cETLus Listed. RoHS (Restriction of Hazardous Substances) and Buy American Act compliant.

Lensing

0.080" thick impact resistant acrylic lensing.

Packaging

Sustainably manufactured outside cardboard box and biodegradable, protective poly-foam luminaire inserts.

Environment

Suitable for dry and damp locations.
Operating temp.: -40°C to +50°C
-40°F to +122°F

Dimming Driver (Integral Driver)

Constant current programmable LED driver. UL listed, class P, 0-10V, dim to 1% of output current. 2.5KV ring wave surge protection and >.90 power factor.

Warranty

http://www.starteklightingamerica.com/images/pdf/warranty/Beam_Series_Warranty.pdf

